

Stride[®] Managed Industrial Ethernet Switches


Industrial Hardened Full Feature Layer 2 Switch



• For detailed specifications on all models, see following pages

		SE Series	SE2 Series
Price			
		starting at \$519.00 (5 port)	starting at \$648.00 (8 port)
Full Feature Layer 2 Switch			
		✓	✓
Industrial Temperature Ranges			
	Wide Temp	-40 to +75°C	-40 to +75°C
Ethernet Connectivity			
	RJ45 Ports	up to 1000 Mbps	up to 1000 Mbps
	Fiber Optic Ports	✓	✓
	SFP Ports	✓	✓
Port Count			
		5,8,10,16	8,16,18
Industrial Protocol Management			
	Modbus TCP	Read	Full Management
	EtherNet/IP	—	Full Full Management
Network Redundancy			
	STP/RSTP	✓	✓
	Proprietary Fast Recovery	Real-Time Ring	AD-Ring/AD-RP
Mounting			
	DIN Rail Mount	✓	✓
	Panel Mount	Integrated	Optional accessory
Input Power			
	Redundant Power Inputs	✓	✓
	Reverse Polarity Protection	✓	✓
	Power LED	✓	✓
	Power Alarm	✓	✓
Agency Approvals			
	UL508 / 61010	✓	✓
	Haz Loc—Class 1 Div 2	✓	✓
	ATEX Zone 2	✓	—
	CE	✓	✓
Warranty			
		5 years	5 years

Stride SE2 Series Managed Industrial Ethernet Switches



Stride SE2 Series Managed Models

Part Number	Price	Ethernet Ports	Fiber Ports	Input Power (max)
SE2-SW8M-2C1	\$648.00	6	2 SC	8.1 W

*Optional SFP modules sold separately.

Features


- Modbus TCP management capability
- EtherNet/IP management capability
- Wide temp range
- DIN-rail mount with optional panel mount accessory
- Metal housing
- 12, 24 VDC redundant input
- Gigabit Ethernet (GbE) models
- Haz Loc
- 5-year warranty

Panel Mounting Brackets

- Stride SE2 series DIN-rail mounted switches can be panel mounted with the addition of the optional panel mounting brackets [SE2-PM1](#) or [SE2-PM3](#).

SE2-Series Panel Mounting Brackets

Part Number	Price	For use with switch model
SE2-PM1	\$18.00	SE2-SW5Ux, SE2-SW8U-x, and SE2-MCx
SE2-PM3	\$24.00	SE2-SWPx and all SE2 managed switches

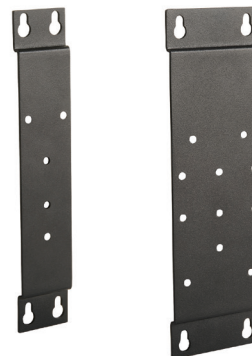

Stride SE2 Series Managed Industrial Ethernet Switches

Specifications

General Specifications	
Operating Mode	Store and forward wire speed switching, non-blocking
Devices Supported	All IEEE 802.3 compliant devices are supported
MAC Addresses	8K
Ethernet Protocols Supported	SNMPv1 / v2 / v3, RMON, DHCP, SNTP, TFTP, STP, RSTP, QoS / DS, IGMPv1 / v2, VLAN (tag and port based), HTTP, HTTPS (SSL and TLS), Telnet, SSH and more
Industrial Protocols Supported	Modbus TCP, EtherNet/IP, PROFInet, Foundation Fieldbus HSE and others
Packet Forwarding Rate	1.4 Mpps—SE2-SW8M-2C1
Latency	< 10 μ s
Operating Temperature Range	-40 to +75°C [-40 to +167°F]
Storage Temperature Range	-40 to +85°C [-40 to +185°F]
Humidity (non-condensing)	5 to 95% RH
Environmental Air	No corrosive gases permitted
Vibration, Shock & Freefall	IEC60068-2-6, -27, -32
EMI Emissions	FCC CFR47 Part 15, EN55032/CISPR32, Class A
EMS	IEC61000-4-2 (ESD): \pm 8kV (contact), \pm 15kV (air) IEC61000-4-3 (RS): 10V/m (80MHz ~ 2GHz) IEC61000-4-4 (EFT): Power Port \pm 4kV; Data Port: \pm 2kV IEC61000-4-5 (Surge): Power Port: \pm 2kV/DM, \pm 4kV/CM; Data Port \pm 2kV IEC61000-4-6 (CS): 10V (150kHz ~ 80MHz)
RoHS and WEEE	RoHS (Pb free) and WEEE compliant
Packaging and Protection	Metal case, IP40
Hazardous Locations	ANSI/ISA 12.12.01-2015 & CSA22.2 No. 213-15 (Class I, Div.2) (file #E200031)
Agency Approvals	UL/cUL 508, CE

Power Details	
Power Input	Redundant Input Terminals
Input Voltage	Class 2 Power Supply: 12-24 VDC
Reverse Power Protection	Yes
Wire Size and Torque	18-12 AWG, max wire length 3m [9.84 ft]; Wire strip length 7mm; Torque: 3.5 lb-in [0.4 N·m]
Power Consumption	Refer to Stride SE2 Series Managed Models table

SC or ST Fiber Port: (100BaseFX multimode)	
100BaseFX Ports	2
Fiber Port Connector	ST or SC, by model
Optimal Fiber Cable	50/125 or 62.5/125 μ m
Center Wavelength	1300 nm
Multimode	Links up to 4 km typ.; > Transmitter power (dBm): -21 min, -17 typ, -14 max > Receiver sensitivity (dBm): -34 typ, -31 max
Nominal Max. Distance (full duplex)	4 km
Eye Safety (laser)	IEC 60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11

RJ45 Ports	
Port Type	Shielded RJ45
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab, 802.3z for Gigabit Ethernet
Auto-Crossover	Yes, allows you to use straight-through or crossover wired cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	Automatic
Cable Requirements	Twisted pair (Cat5e or better) (shielded recommended)
Max. Cable Distance	100 meters

SFP Ports	
SFP (pluggable) ports accept Mini-GBIC (SFP) transceivers with a speed of 1000Mbps or 100Mbps	
See SFP datasheet for optional fiber transceiver specification	

Console ports: USB	
Management Interfaces	Browser, Text (Telnet and SSH), CLI (command line interface) and SNMP (see the user manual for supported MIBs)


Stride SE2 Series Managed Industrial Ethernet Switches

SE2 Series DIN Rail mounted switches

Allow 20mm [0.79"] clearance around the switch for cooling

Dimensions

mm [inches]

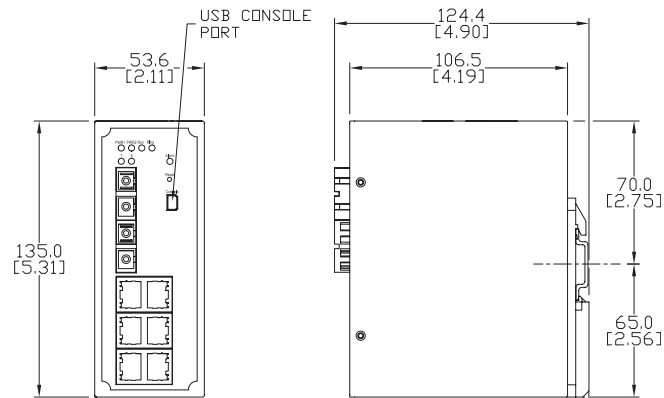

SE2-SW8M-2C1

See our website: www.AutomationDirect.com for complete engineering drawings.

Stride^{SE} Series Managed Switches



Features

- Modbus TCP read capability
- Wide temp range
- DIN-rail mount with integrated panel mount option
- Metal housing
- 12, 24 VDC redundant input
- Gigabit Ethernet (GbE) models
- Haz Loc
- 5 -year warranty



RoHS Compliant



Stride SE Series Managed Models				
Part Number	Price	Ethernet Ports	Fiber Ports	Input Power (max)
<u>SE-SW5M</u>	\$519.00	5	–	3.6 W
<u>SE-SW5M-2SC</u>	\$953.00	3	2 SC	5.6 W
<u>SE-SW5M-2ST</u>	\$953.00		2 ST	
<u>SE-SW8M</u>	\$772.00	8	–	4.3 W
<u>SE-SW8M-2ST</u>	\$999.00	6	2 ST	6.3 W
<u>SE-SW8MG-4P</u>	\$1,359.00	4 GbE, 4 GbE combo	4 GbE SFP combo*	15W
<u>SE-SW10MG-2P</u>	\$1,529.00	7, 1 GbE, 2 GbE combo	2 GbE SFP combo*	7W
<u>SE-SW16M</u>	\$1,299.00	16	–	

*Optional SFP modules sold separately.

Stride SE Series Managed Industrial Ethernet Switches

Specifications

General Specifications	
Ethernet Switch Type	Industrial Ethernet managed switch with 5 or 8 ports
Operating Mode	Store and forward wire speed switching, non-blocking. Broadcast and multicast storm protection
Devices Supported	All IEEE 802.3 compliant devices are supported
Ethernet Compliance	IEEE 802.3 (10Mbps Ethernet supports legacy devices) IEEE 802.3u (Fast Ethernet 100Mbps for newer devices) IEEE 802.3x (Full-Duplex with Flow Control) IEEE 802.1D/w (Rapid Spanning Tree for redundant rings and Spanning Tree for interoperability) IEEE 802.1p (Priority Queuing – QoS, CoS, ToS/DS) IEEE 802.1Q (VLAN for traffic segregation) IEEE 802.3ab
Ethernet Protocols Supported	SNMPv1 / v2 / v3, RMON, DHCP, SNTP, TFTP, STP, RSTP, QoS / CoS / ToS / DS, IGMPv1 / v2, VLAN (tag and port based), HTTP, HTTPS (SSL and TLS), Telnet, SSH and more
Industrial Protocols Supported	Modbus / TCP, EtherNet / IP, PROFINet, Foundation Fieldbus HSE and others
MAC Addresses	2048 addresses
Memory Bandwidth	3.2 Gbps
Latency (typical)	10M ports 16 μ s + frame time 100M & 1000M ports 5 μ s + frame time
Transient Protection	15,000 watts peak
Spike Protection	5,000 watts (10x for 10 μ s)
Ethernet Isolation	1500 VRMS 1 minute
Operating Temperature Range	-40 to +75°C (cold startup at -40°C), -40 to +167°F (cold startup at -40°F)
Storage Temperature Range	-40 to +85°C [-40 to +185°F]
Humidity (non-condensing)	5 to 95% RH
Environmental Air	For use in Pollution Degree 2 environment. No corrosive gases permitted
Vibration and shock	IEC60068-2-6 and -27
EMI Emissions	FCC part 15, ICES-003, EN61000-6-4
EMC Immunity	IEC61000-6-2, CE
Eye Safety (fiber models)	IEC60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11
RoHS and WEEE	RoHS and WEEE compliant
Packaging and Protection	Metal case; IP40
Agency Approvals	Electrical safety: UL Haz Loc (Class 1, Div 2, Group A, B, C, D) E200031 CSA C22.2/14; EN61010-1, CE, Marine and offshore rated per ABS

Power Details	
Power Input	Redundant input terminals
Input Voltage	10-30 VDC (continuous)–Class 2 Power Supply
Reverse Power Protection	Yes
“OK” Output Indicates Power and Operational Status	Voltage same as switch input voltage Maximum current output 0.5 Amp
Power Consumption	Refer to Stride SE Series Managed Models table

RJ45 Ports	
Port Type	Shielded RJ45
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab, 802.3z for Gigabit Ethernet
Auto-Crossover	Yes, allows you to use straight-through or crossover wired cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	Automatic
Cable Requirements	Twisted pair (Cat5e or better) (shielded recommended)
Max. Cable Distance	100 meters

SC or ST Fiber Port: (100BaseFX multimode)	
100BaseFX Ports	2
Fiber Port Connector	ST or SC, by model
Optimal Fiber Cable	50/125 or 62.5/125 μ m
Center Wavelength	1300 nm
Multimode	Links up to 4 km typ.; > Transmitter power (dBm): -21 min, -17 typ, -14 max > Receiver sensitivity (dBm): -34 typ, -31 max
Nominal Max. Distance (full duplex)	4 km
Eye Safety (laser)	IEC 60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11




SFP Ports	
SFP (pluggable) ports accept Mini-GBIC (SFP) transceivers with a speed of 1000Mbps or 100Mbps	
See SFP datasheet for optional fiber transceiver specification	

Console ports: USB and RS232 (RJ45)	
Management Interfaces	Browser, Text (Telnet and SSH), CLI (command line interface) and SNMP (see the user manual for supported MIBs)

Stride^{SE} Series Managed Industrial Ethernet Switches

Dimensions



Inches [mm]

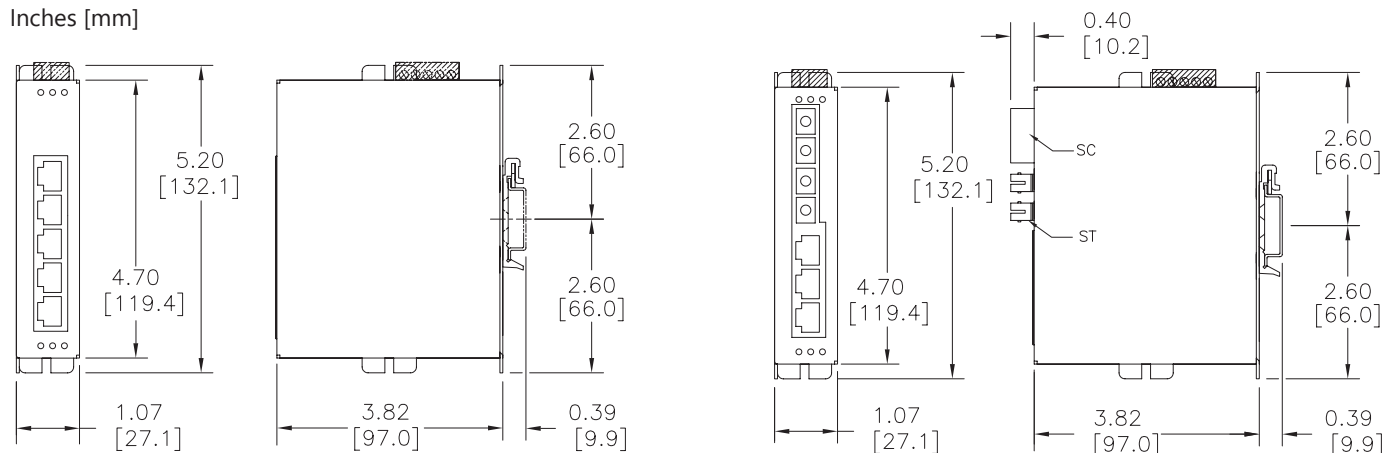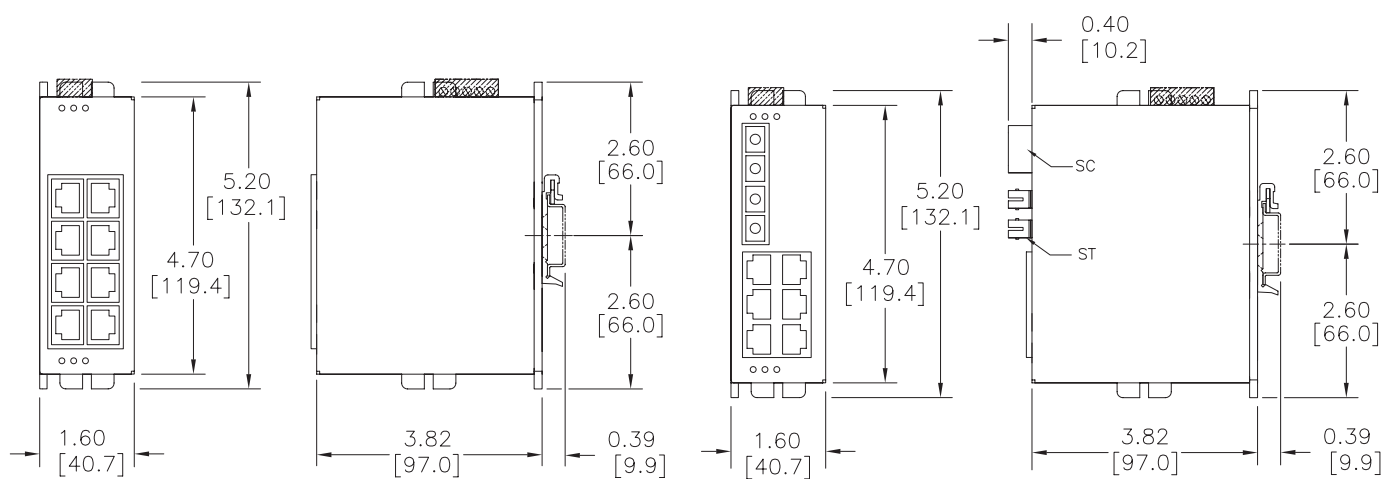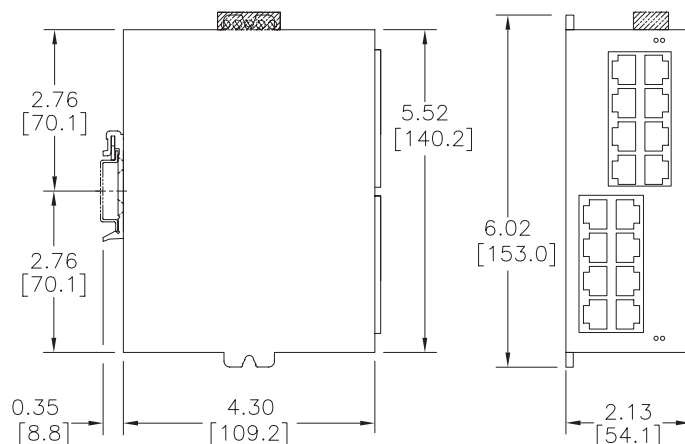**SE-SW5M****SE-SW5M-2SC**
SE-SW5M-2ST**SE-SW8M****SE-SW8M-2ST****SE-SW16M**See our website: www.AutomationDirect.com for complete engineering drawings.

Stride SE Series Managed Industrial Ethernet Switches

Dimensions

Inches [mm]

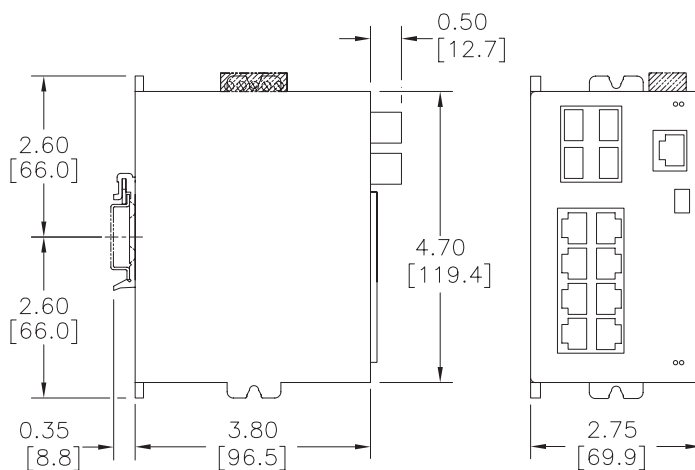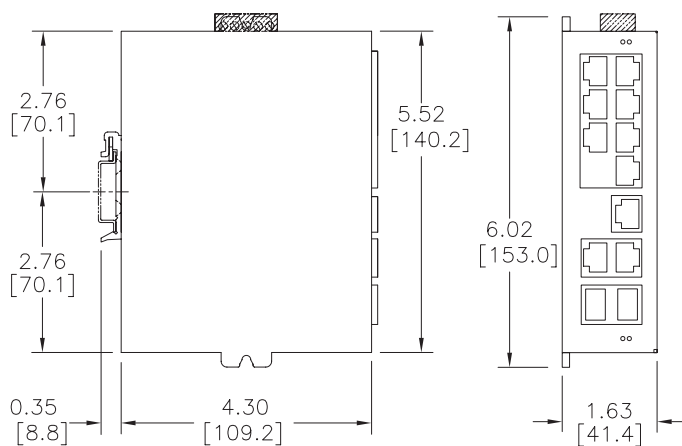**SE-SW8MG-4P****SE-SW10MG-2P**

See our website: www.AutomationDirect.com for complete engineering drawings.

Stride Industrial Ethernet Fiber Transceivers

Fast Ethernet

Description:

STRIDE 100Mb Small Form Factor Pluggable (SFP) transceiver modules (Transmit/Receive). Hot Swappable. 1310nm wavelength. Data transmission up to 4km multimode fiber (SFP-4K-FMF) or 30km singlemode fiber (SFP-30K-FSF). LC duplex receptacle, SFP Multi-Source Agreement compliant.



NOTE: Port speed settings for the Stride switch must be manually set to 100 Mbps.

Part Number	Mode	Light Source	Max Trans. Distance	Price
SFP-4K-FMF	Multi-mode	1310 nm, FP	4km	\$116.00
SFP-30K-FSF	Single-mode		30 km	\$55.00

Note: Use only Gigabit speed SFPs with SE2-SW10UG-2P-T

Transmitter Optical characteristics				
Parameter (unit)		Minimum	Typical	Maximum
Output optical power (dBm)	SFP-4K-FMF	-9		0
	SFP-30K-FSF	-15		-8
Extinction Ratio (dB)	SFP-4K-FMF	8.2		
	SFP-30K-FSF			
Center Wavelength (nm)	SFP-4K-FMF	1261	1310	1360
	SFP-30K-FSF			
Spectral width - RMS (nm)	SFP-4K-FMF			7
	SFP-30K-FSF			4
Rise / Fall Time - 10% - 90% (ns)	SFP-4K-FMF			2
	SFP-30K-FSF			


Receiver Optical characteristics			
Parameter (unit)		Minimum	Maximum
Sensitivity (dBm)	SFP-4K-FMF		-30
	SFP-30K-FSF		-34
Operating Wavelength (nm)	SFP-4K-FMF	1260	1620
	SFP-30K-FSF		
Loss of Signal - Deasserted (dBm)	SFP-4K-FMF		-30
	SFP-30K-FSF		-35
Loss of Signal - Asserted (dBm)	SFP-4K-FMF	-45	
	SFP-30K-FSF		
Loss of Signal - Hysteresis (dB)	SFP-4K-FMF	0.5	
	SFP-30K-FSF		

General Specifications

Connector Type		Type LC connector with bail latch
Operating Temperature range		-40 to +85 °C [-40 to +185 °F]
Storage temperature range		-40 to +85 °C [-40 to +185 °F]
Humidity (non-condensing)		5 to 95% RH
Link Speed		Gigabit Ethernet
Laser Type		FP laser diode (Class 1 laser safety standard IEC 60825 compliant)
Media	SFP-4K-FMF	Multi-mode Fiber
	SFP-30K-FSF	Single-mode Fiber
Fiber	SFP-4K-FMF	62.5 / 125 µm
	SFP-30K-FSF	9 / 125 µm
Code	SFP-4K-FMF	FX5
	SFP-30K-FSF	100LX
Distance	SFP-4K-FMF	4km
	SFP-30K-FSF	30 km
Compliances	SFP-4K-FMF	125Mbps IEEE802.3u 100BASE-FX compliant 125Mbps FDDI ISO/IEC 9314-1 compliant
	SFP-30K-FSF	125Mbps IEEE802.3ah 100BASE-LX10 compliant 155Mbps ITU-T G957 STM S-1.1/L-1.1 compliant 155Mbps SONET OC-3 IR-1/LR-1 compliant
Inputs / Outputs		AC-coupled differential inputs and outputs

Dimensions

Inches [mm]

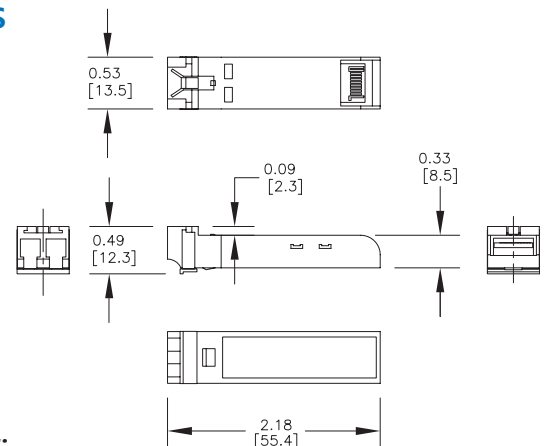

Safety Standards:



Stride Industrial Ethernet Fiber Transceivers

Gigabit Ethernet

Description:

STRIDE Gigabit (1.25GB) Small Form Factor Pluggable (SFP) transceiver module (Transmit/Receive). Hot Swappable. Short or long wavelength of 850nm or 1310nm, dependant on model. Supports data transmission up to 550 meters, 2km, 10 km, or 30 km on a single-mode or multi-mode fiber, dependant on model. LC duplex receptacle, SFP Multi-Source Agreement compliant.



Part Number	Mode	Light Source	Max Trans. Distance	Price
SFP-500-GMF	Multi-mode	850 nm, VCSEL	550m	\$92.00
SFP-2K-GMF			2km	\$71.00
SFP-10K-GSF	Single-mode	1310 nm, FP	10 km	\$97.00
SFP-30K-GSF			30 km	\$99.00

Note: Use only Gigabit speed SFPs with SE2-SW10UG-2P-T


Transmitter Optical characteristics				
Parameter (unit)		Minimum	Typical	Maximum
Output optical power (dBm)	SFP-500-GMF	-9.5		-4
	SFP-2K-GMF	-9		-1
	SFP-10K-GSF	-9.5		-3
	SFP-30K-GSF	-2	1	3
Extinction Ratio (dB)	SFP-500-GMF	9		
	SFP-2K-GMF			
	SFP-10K-GSF			
	SFP-30K-GSF			
Center Wavelength (nm)	SFP-500-GMF	830	850	860
	SFP-2K-GMF	1270		1355
	SFP-10K-GSF	1285		1343
	SFP-30K-GSF	1270		1355
Spectral width - RMS (nm)	SFP-500-GMF			0.85
	SFP-2K-GMF			4
	SFP-10K-GSF			2.8
	SFP-30K-GSF			1
Rise / Fall Time - 20% - 80% (ps)	SFP-500-GMF			260
	SFP-2K-GMF			
	SFP-10K-GSF			
	SFP-30K-GSF			

Receiver Optical characteristics			
Parameter (unit)		Minimum	Maximum
Sensitivity (dBm)	SFP-500-GMF		-17
	SFP-2K-GMF		-19
	SFP-10K-GSF		-20
	SFP-30K-GSF		-23
Operating Wavelength (nm)	SFP-500-GMF	770	860
	SFP-2K-GMF	1260	1610
	SFP-10K-GSF	1270	1355
	SFP-30K-GSF		1580
Return Loss (dB)	SFP-500-GMF	12	
	SFP-2K-GMF		
	SFP-10K-GSF		
	SFP-30K-GSF		
Loss of Signal - Deasserted (dBm)	SFP-500-GMF		-17.5
	SFP-2K-GMF		-19
	SFP-10K-GSF		-20
	SFP-30K-GSF		-23
Loss of Signal - Asserted (dBm)	SFP-500-GMF	-35	
	SFP-2K-GMF		
	SFP-10K-GSF		
	SFP-30K-GSF		
Loss of Signal - Hysteresis (dB)	SFP-500-GMF	0.5	
	SFP-2K-GMF		
	SFP-10K-GSF		
	SFP-30K-GSF		

General Specifications	
Connector Type	Type LC connector with bail latch
Operating Temperature range	-40 to +85 °C [-40 to +185 °F]
Storage temperature range	-40 to +85 °C [-40 to +185 °F]
Humidity (non-condensing)	5 to 95% RH
Link Speed	Gigabit Ethernet
Laser Type	SFP-500-GMF VCSEL laser diode (Class 1 laser safety standard IEC 60825 compliant)
	SFP-2K-GMF FP laser diode (Class 1 laser safety standard IEC 60825 compliant)
	SFP-10K-GSF DFB laser diode (Class 1 laser safety standard IEC 60825 compliant)
	SFP-30K-GSF DFB laser diode (Class 1 laser safety standard IEC 60825 compliant)
Media	SFP-500-GMF Multi-mode Fiber
	SFP-2K-GMF Single-mode Fiber
	SFP-10K-GSF Single-mode Fiber
	SFP-30K-GSF Single-mode Fiber
Fiber	SFP-500-GMF 50 / 125 µm and 62.5 / 125 µm
	SFP-2K-GMF 50 / 125 µm and 62.5 / 125 µm
	SFP-10K-GSF 9 / 125 µm
	SFP-30K-GSF 9 / 125 µm
Code	SFP-500-GMF SX
	SFP-2K-GMF SX2
	SFP-10K-GSF LX
	SFP-30K-GSF lhx
Distance	SFP-500-GMF 550m
	SFP-2K-GMF 2km
	SFP-10K-GSF 10 km
	SFP-30K-GSF 40 km
Compliances	SFP-500-GMF 1.0625Gbps Fiber Channel FC-PI 100-M5-SN-I compliant 1.0625Gbps Fiber Channel FC-PI 100-M6-SN-I compliant 1.25Gbps IEEE 802.3z 1000BASE-SX compliant 1.25Gbps IEEE 802.3ah 1000BASE-SX compliant
	SFP-2K-GMF IEEE 802.3 1000BASE-SX+ compliant
	SFP-10K-GSF 1.0625Gbps Fiber Channel FC-PI 100-SM-LC-L compliant 1.25Gbps IEEE 802.3 1000BASE-LX compliant
	SFP-30K-GSF 1.25Gbps Gigabit Ethernet compliant
Inputs / Outputs	AC-coupled differential inputs and outputs

Dimensions

Inches [mm]

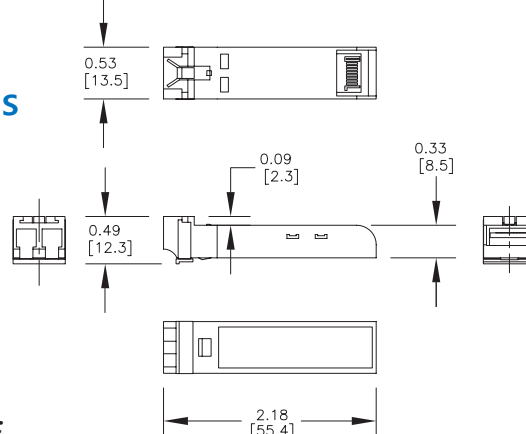

Safety Standards:



Stride[®] Unmanaged Industrial Ethernet Switches

Features

- Reliable connectivity
- Industrially hardened
- Simple installation

- For detailed specifications on all models, see following pages



		SE Series	SE2 Series DIN Rail	SE2 Series IP65	SE3 Series DIN Rail	SE3 Series IP67
Price		starting at \$129.00	starting at \$138.00	starting at \$354.00	starting at \$78.00	starting at \$279.00
Broadcast Storm Protection		—	✓	—	—	—
Industrial Temperature Ranges						
	Standard Temp	-10 to +60°C	-10 to +60°C	—	-10 to +65°C	—
	Wide Temp	-40 to +85°C	-40 to +75°C	-40 to +75°C	-40 to +75°C	-40 to +75°C
Port Connectivity						
	Port Count	2 to 9	2 to 18	5	5 to 16	5
	RJ45 Port Speed	up to 100 Mbps	up to 1000 Mbps	—	up to 1000 Mbps	—
	M12 Port Speed	—	—	up to 100 Mbps	—	up to 100 Mbps
	Fiber Optic Ports	✓	✓	—	✓	—
	PoE+ Ports	—	✓	—	✓	—
	SFP Ports	—	✓	—	✓	—
Mounting						
	DIN Rail Mount	✓	✓	—	✓	✓
	Panel Mount	✓	✓	✓	✓	✓
Input Power						
	Redundant Power Inputs	✓	✓	✓	✓	✓
	Reverse Polarity Protection	✓	✓	✓	✓	✓
	Power LED	✓	✓	✓	✓	✓
Agency Approvals						
	UL508 or UL61010	✓	✓	✓	✓	✓
	Haz Loc—Class 1 Div 2	✓	✓	—	✓	—
	IECEX	✓	—	—	—	—
	ATEX Zone 2	✓	—	—	—	—
	CE	✓	✓	✓	✓	✓
	EN50155 & EN50121	—	—	✓	—	—
Warranty						
		5 years	5 years	5 years	5 years	5 years
Activity, Link & Speed LEDs						
		✓	✓	✓	✓	✓


Stride SE3 Series Unmanaged Industrial Ethernet Switches

SE3 Series Non-PoE DIN Rail Mounted



Features

- Wide temp range option
- DIN rail and panel mounting
- 12, 24 or 48 VDC redundant input
- GbE models
- Haz Loc
- IP30 metal cases
- 5-year warranty



RoHS Compliant

Stride SE3 Non-PoE DIN Rail Mounted Unmanaged Models

Part Number	Price	RJ45 10/100	RJ45 GbE	Fiber	Input power (max.)	Operating Temp	Agency Approvals
<u>SE3-SW5U</u>	\$78.00	5	–	–	1.2 W	-10 to +65°C [14 to 149°F]	See General Specifications Table for each model's approvals
<u>SE3-SW5U-T</u>	\$105.00				1.2 W	-40 to +75°C [-40 to 167°F]	
<u>SE3-SW8U</u>	\$121.00	8			2.2 W	-10 to +65°C [14 to 149°F]	
<u>SE3-SW8U-T</u>	\$136.00				2.2 W		
<u>SE3-SW5UG-T</u>	\$170.00	–			5	6.6 W	
<u>SE3-SW8UG-T</u>	\$229.00				8	9.2 W	
<u>SE3-SW5U-1C1-T</u>	\$167.00	4	–	1 SC	5W	-40 to +75°C [-40 to 167°F]	
<u>SE3-SW5U-1T1-T</u>	\$167.00			1 ST	5W		
<u>SE3-SW6U-2C1-T</u>	\$219.00			2 SC	6W		
<u>SE3-SW6U-2T1-T</u>	\$219.00			2 ST	6W		
<u>SE3-SW7U-2P-T</u>	\$219.00	5		2 SFP*	8W		
<u>SE3-SW5UG-1P-T</u>	\$199.00	–		4	1 SFP*		
<u>SE3-SW10UG-2P-T</u>	\$329.00		8	2 SFP*	12W		
<u>SE3-SW16UG-4P-T</u>	\$499.00		12	4 SFP*	15.4 W		

* Optional SFP modules sold separately.

Stride SE3 Series Unmanaged Industrial Ethernet Switches

SE3 Series Non-PoE DIN Rail Mounted

General Specifications															
		<u>SE3-SW5U</u>	<u>SE3-SW5U-I</u>	<u>SE3-SW8U</u>	<u>SE3-SW8U-I</u>	<u>SE3-SW5UG-I</u>	<u>SE3-SW8UG-I</u>	<u>SE3-SW5U-1C1-I</u>	<u>SE3-SW5U-1T1-I</u>	<u>SE3-SW6U-2C1-I</u>	<u>SE3-SW6U-2T1-I</u>	<u>SE3-SW7U-2P-I</u>	<u>SE3-SW5UG-1P-I</u>	<u>SE3-SW10UG-2P-I</u>	<u>SE3-SW16UG-4P-I</u>
Processing Type		Store and forward													
Devices Supported		All IEEE 802.3 compliant devices are supported													
MAC Addresses	1K	●	●	●	●										
	2K							●	●	●	●				
	8K					●	●					●	●	●	●
Memory Buffer	448Kbits	●	●	●	●			●	●	●	●				
	1Mbit					●							●		
	4Mbits						●					●		●	●
Packet Forwarding Rate		14.88 Kpps for Ethernet ports 148.8 Kpps for Fast Ethernet ports 14,888 Kpps for Gigabit Ethernet ports													
Jumbo Frame Support	9.6 Kbytes						●					●		●	●
	10Kbytes					●							●		
Storage Temperature Range		-40 to +85 °C [-40 to +185 °F]													
Humidity (Non-Condensing)		5 to 95% RH													
Environmental Air		No corrosive gases permitted													
Vibration, Shock & Freefall		IEC60068-2-6, -27, -32													
EMI Emissions		FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A													
EMS		CE EN55035/EN61000-6-2 Class A: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)													
RoHS		RoHS (Pb-free) compliant													
Packaging and Protection		Metal case, IP30													
Hazardous Locations (Class I, Div.2)	ANSI/ISA 12.12.01					●		●	●	●	●	●	●	●	
Agency Approvals	FCC, CE	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	UL 61010-1, 61010-2-201	●	●	●	●	●	●					●	●	●	●
	UL 508							●	●	●	●				

Stride SE3 Series Unmanaged Industrial Ethernet Switches

SE3 Series Non-PoE DIN Rail Mounted

Power Details	
Power Input	Redundant input terminals, removable terminal block
Input Voltage	Class 2 power supply: 12-48 VDC
Reverse Power Protection	Yes
Power Consumption	Refer to Models table
Relay Contact	24VDC, 1A resistive, open on fault (not present on SE3-SW5U, SE3-SW5U-T)

RJ45 Ports	
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab for Gigabit Ethernet
Auto-Crossover	Yes, allows use of straight-through or crossover cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	IEEE 802.3x flow control, back pressure flow control
Cable Requirements	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm 1000BaseTX: UTP/STP Cat.5/5E cable EIA/TIA-568 100-ohm
Max. Cable Distance	100m [328ft]


SC/ST Fiber Port (100BaseFX multimode)	
Optimal Fiber Cable	50/125 or 62.5/125 μ m
Center Wavelength	1310 nm
Multimode	Transmitter power into 50/125 cable (dBm): -20 min, -14 max Transmitter power into 62.5/125 cable (dBm): -23.5 min, -14 max Receiver sensitivity (dBm): -32
Nominal Max. Distance	2km [1.24 mi]
Eye Safety (laser)	IEC 60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11

SFP Ports	
Ethernet Compliance	IEEE 802.3, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab, 802.3z for Gigabit Ethernet
SFP (pluggable) ports accept 100/1000 Mbps Mini-GBIC (SFP) transceivers. See SFP module datasheet for optional fiber transceiver specifications	

Front Panel LEDs		
LED	State	Description
PWR1/PWR2	On	Power connected and operational
	Off	No voltage
FAULT	On	Power input 1 or 2 is inactive
	Off	Power input 1 and 2 are both functional
RJ45/SC/ST/SFP Port LINK/ACT*	On	Indicates that there is a proper Ethernet connection (link) between the port and another Ethernet device but that no communications activity is detected
	Blinking	Indicates that there is a proper Ethernet connection (link) between the port and another Ethernet device and that there is communications activity
	Off	Indicates that there is not a proper Ethernet connection (link) between the port and another Ethernet device

* See user manual (SE3-USER-M) for details of LED operation for each model.

Dimensions					
Part Number	Weight kg [lb]	Width (A)	Depth (B)	Height (C)	Drawing
		mm [inches]			
SE3-SW5U	0.30 [0.66]	26 [1.0]	75 [3.0]	95 [3.7]	PDF
SE3-SW5U-T					PDF
SE3-SW8U	0.34 [0.74]	40 [1.6]	70 [2.8]	95 [3.7]	PDF
SE3-SW8U-T					PDF
SE3-SW5UG-T	0.45 [0.99]	30 [1.2]	95 [3.7]	140 [5.5]	PDF
SE3-SW8UG-T	0.52 [1.14]				PDF
SE3-SW5U-1C1-T	0.50 [1.10]	30 [1.2]	99 [3.9]	142 [5.6]	PDF
SE3-SW5U-1T1-T					PDF
SE3-SW6U-2C1-T					PDF
SE3-SW6U-2T1-T					PDF
SE3-SW7U-2P-T	0.57 [1.24]	46 [1.8]			PDF
SE3-SW5UG-1P-T	0.59 [1.30]				PDF
SE3-SW10UG-2P-T	0.71 [1.56]				PDF
SE3-SW16UG-4P-T	1.16 [2.57]				PDF

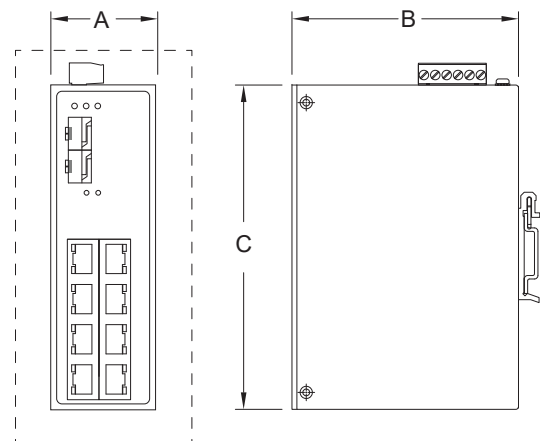

Stride SE3 Series Unmanaged Industrial Power Over Ethernet Switches

SE3 Series PoE+ DIN Rail Mounted



Features

- Wide temp range
- DIN rail and panel mounting
- 12, 24 or 48 VDC redundant input
- GbE models
- 30W per port PoE+
- Haz Loc
- IP30 metal cases
- 5-year warranty



RoHS Compliant

Stride SE3 PoE+ DIN Rail Mounted Unmanaged Models

Part Number	Price	RJ45 10/100 PoE+	RJ45 GbE PoE+	RJ45 10/100 Non-PoE	RJ45 GbE Non-PoE	Fiber	System Power Requirements (max.)	Operating Temp	Agency Approvals
SE3-SWP1A5U-T	\$249.00	4	—	1	—	—	4W	-40 to +75°C [-40 to 167°F]	FCC, CE, UL 508
SE3-SWP2A5U-T	\$259.00	4	—				5.5 W		
SE3-SWP2A5UG-T	\$349.00	—	4	—	1		6.3 W		FCC, CE, UL 61010-1, 61010-2-201
SE3-SWP2A7U-2P-T	\$299.00	4	—	1	—	2 SFP*	9W		

* Optional SFP modules sold separately.

Power Details


Power Input	Redundant input terminals, removable terminal block	
Input Voltage (Class 2 Power Supply)	SE3-SWP1A5U-T	48–55 VDC
	SE3-SWP2A5U-T, SE3-SWP2A5UG-T	12–36 VDC
	SE3-SWP2A7U-2P-T	12–55 VDC
Reverse Power Protection	Yes	
Relay Contact	24VDC, 1A resistive, open on fault	

PoE Details

Max PoE Power Output	30W per PoE port	
Max PoE Power Budget	SE3-SWP1A5U-T	120W
	SE3-SWP2A5U-T	90–120W/12–36VDC
	SE3-SWP2A5UG-T	120W
	SE3-SWP2A7U-2P-T	60W/12VDC, 120W/36–55VDC
PoE Pinout	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, MDI Alternative A)	
PD (Powered Device) Detection	Yes - the switch port will detect the presence of a PoE enabled device before sending power. If a non-PoE device is detected, power will not be sourced on that port but Ethernet communications will be permitted.	
PoE Overload Protection	Yes	
Reverse Protection	Yes	
Redundancy Protection	Yes	

Dimensions

Part Number	Weight kg [lb]	Width (A)	Depth (B)	Height (C)	Drawing
		mm [inches]			
SE3-SWP1A5U-T	0.50 [1.10]	30 [1.2]	99 [3.9]	142 [5.6]	PDF
SE3-SWP2A5U-T	0.76 [1.68]	46 [1.8]	99 [3.9]	142 [5.6]	PDF
SE3-SWP2A5UG-T	0.70 [1.54]				PDF
SE3-SWP2A7U-2P-T	0.82 [1.81]				PDF

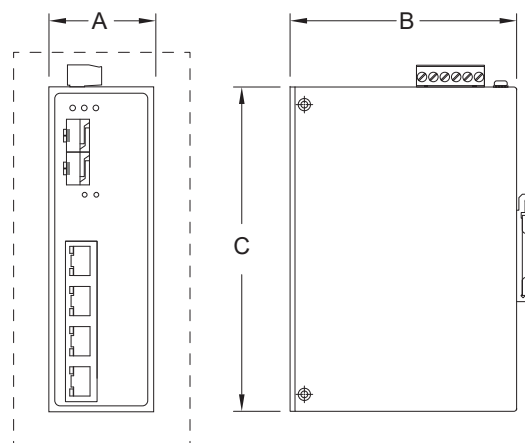

Stride SE3 Series Unmanaged Industrial Power Over Ethernet Switches

SE3 Series PoE+ DIN Rail Mounted

General Specifications				
	SE3-SWP1A5U-T	SE3-SWP2A5U-T	SE3-SWP2A5UG-T	SE3-SWP2A7U-2P-T
Processing Type	Store and forward			
Devices Supported	All IEEE 802.3 compliant devices are supported			
MAC Addresses	2K		8K	
Memory Buffer	448Kbits		1Mbit	4Mbits
Packet Forwarding Rate	14.88 Kpps for Ethernet ports 148.8 Kpps for Fast Ethernet ports 14,888 Kpps for Gigabit Ethernet ports			
Jumbo Frame Support	–		10Kbytes	9.6 Kbytes
Storage Temperature Range	-40 to +85°C [-40 to +185°F]			
Humidity (Non-Condensing)	5 to 95% RH			
Environmental Air	No corrosive gases permitted			
Vibration, Shock & Freefall	IEC60068-2-6, -27, -32			
EMI Emissions	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A			
EMS	CE EN55035/EN61000-6-2 Class A: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)			
RoHS	RoHS (Pb-free) compliant			
Packaging and Protection	Metal case, IP30			
Hazardous Locations (Class I, Div.2)	ANSI/ISA 12.12.01			
Agency Approvals	FCC, CE			
	UL 508		UL 61010-1, 61010-2-201	

Front Panel LEDs		
LED	State	Description
PWR1/PWR2	On	Power connected and operational
	Off	No voltage
FAULT	On	Power input 1 or 2 is inactive
	Off	Power input 1 and 2 are both functional
RJ45*/SFP Port LINK/ACT	On	Indicates that there is a proper Ethernet connection (link) between the port and another Ethernet device but that no communications activity is detected
	Blinking	Indicates that there is a proper Ethernet connection (link) between the port and another Ethernet device and that there is communications activity
	Off	Indicates that there is not a proper Ethernet connection (link) between the port and another Ethernet device
PoE (Ports 1–4)	On	The port is supplying power to the powered device
	Off	No powered device attached or failure in PoE power

* Upper LED indicates connection at highest available speed on RJ45 ports.

RJ45 Ports	
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab for Gigabit Ethernet IEEE 802.3af or 802.3at for PoE
Auto-Crossover	Yes, allows use of straight-through or crossover cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	IEEE 802.3x flow control, back pressure flow control
Cable Requirements	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm 1000BaseTX: UTP/STP Cat.5/5E cable EIA/TIA-568 100-ohm
Max. Cable Distance	100m [328ft]

SFP Ports	
Ethernet Compliance	IEEE 802.3, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab, 802.3z for Gigabit Ethernet
SFP (pluggable) ports accept 100/1000 Mbps Mini-GBIC (SFP) transceivers. See SFP module datasheet for optional fiber transceiver specifications.	

Stride

SE3 Series Unmanaged Industrial Ethernet Switches

SE3 Series IP67 Rated



Features

- Rugged IP67 rating
- Tight M12 connections
- Wide temp range
- Panel and DIN rail mount
- 12, 24 or 48 VDC redundant input
- 5-year warranty



Stride SE3 Series IP67 Rated Models					
Part Number	Price	M12, IP67 10/100Tx Ethernet Ports	Input power (max.)	Operating Temp	Agency Approvals
SE3-SW5U-N67-T	\$279.00	5	0.5 W	-40 to +75°C [-40 to 167°F]	FCC, CE, UL 61010-1, 61010-2-201

Stride SE3 Series Unmanaged Industrial Ethernet Switches

SE3 Series IP67 Rated

General Specifications	
Processing Type	Store and forward
Devices Supported	All IEEE 802.3 compliant devices are supported
MAC Addresses	1K
Memory Buffer	448Kbits
Packet Forwarding Rate	14.88 Kpps for Ethernet ports 148.8 Kpps for Fast Ethernet ports
Storage Temperature Range	-40 to +85°C (-40 to +185°F)
Humidity (Non-Condensing)	5 to 95% RH
Environmental Air	No corrosive gases permitted
Vibration, Shock & Freefall	IEC60068-2-6, -27, -32
EMI Emissions	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2 Class A: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
RoHS	RoHS (Pb-free) compliant
Packaging and Protection	Plastic case, IP67
Agency Approvals	FCC, CE, UL 61010-1, 61010-2-201

Power Details	
Power Connection	Dual DC power inputs through M12 5-pin A-coded male connector
Input Voltage	Class 2 power supply: 12-48 VDC redundant power inputs
Reverse Power Protection	Yes
System Power Consumption	0.5 W
Relay Contact	No

M12 Ethernet Ports	
10/100BaseT Ports	M12, female, D-coded, 4-pin
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x for 10/100 Ethernet
Auto-Crossover	Yes, allows use of straight-through or crossover cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	IEEE 802.3x flow control, back pressure flow control
Cable Requirements	Twisted pair (Cat5e or better, shielded recommended)
Max. Cable Distance	100m [328ft]


Note: M12 caps need to be used on open (disconnected) ports.

Replacement caps (Part # ZP-JBH-CAP) are available from AutomationDirect.com.

Front Panel LEDs		
LED	State	Description
PWR	On	Power input 1 or 2 is connected and operational
	Off	Power input 1 and 2 are both inactive
Ethernet Port LINK/ACT	On	Indicates that there is a proper Ethernet connection (link) between the port and another Ethernet device but that no communications activity is detected
	Blinking	Indicates that there is a proper Ethernet connection (link) between the port and another Ethernet device and that there is communications activity
	Off	Indicates that there is not a proper Ethernet connection (link) between the port and another Ethernet device

Dimensions

mm [Inches]

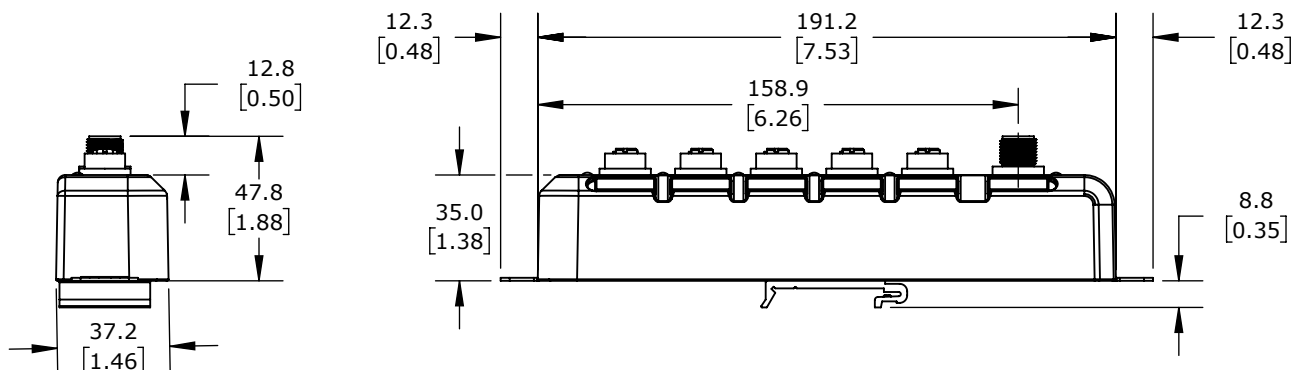

See our website: www.AutomationDirect.com for complete engineering drawings.


Stride SE2 Series Unmanaged Industrial Ethernet Switches and Media Converters

SE2 Series DIN Rail mounted switches



Features

- Broadcast storm protection
- Wide temp range option
- Optional panel mounting accessory
- 12, 24, 48 VDC & 18-30 VAC redundant input
- GbE models
- Haz Loc
- IP30 metal cases
- 5-year warranty



RoHS Compliant

Stride SE2 Unmanaged Models							
Part Number	Price	RJ45 10/100	RJ45 GbE	Fiber	Input power (max.)	Operating Temp	Agency Approvals
<u>SE2-MC2U-C1-T</u>	Retired	1	–	1 SC	3.4 W	-40 to +75°C [-40 to +167°F]	UL/cUL 61010-1 and 61010-2-201, Haz Loc, CE
<u>SE2-SW5UG-T</u>	Retired	–	5	–	4.5 W	-40 to +75°C [-40 to +167°F]	
<u>SE2-SW8U</u>	\$138.00	8	–	–	4.6 W	-10 to +60°C [+14 to +140°F]	
<u>SE2-SW8U-T</u>	Retired		–	–		-40 to +75°C [-40 to +167°F]	
<u>SE2-SW8U-2C1-T</u>	\$239.00	6	–	2 SC			

* Optional SFP modules sold separately. Use only Gigabit speed SFPs with SE2-SW10UG-2P-T.

Panel Mounting Brackets

Stride SE2 series DIN-rail mounted switches can be panel mounted with the addition of the optional panel mounting brackets [SE2-PM1](#) or [SE2-PM3](#).

SE2-Series Panel Mounting Brackets		
Part Number	Price	For use with switch model
<u>SE2-PM1</u>	\$18.00	SE2-SW5Ux, SE2-SW8U-x, and SE2-MCx
<u>SE2-PM3</u>	\$24.00	SE2-SWPx and all SE2 managed switches

[SE2-PM1](#)[SE2-PM3](#)

Stride SE2 Series Unmanaged Industrial Ethernet Switches and Media Converters

SE2 Series DIN Rail mounted switches

General Specifications	
Operating Mode	Store and forward wire speed switching, non-blocking
Devices Supported	All IEEE 802.3 compliant devices are supported
MAC Addresses	8K for SE2-SWxG-T, 2K
Packet Forwarding Rate	0.75 Mpps - SE2-MC2U-x & SE2-SW5U-x 1.2 Mpps - SE2-SW8U-x 7.4 Mpps - SE2-SW5UG-T
Broadcast Storm Protection*	DIP switch enabled (DIP switch I ON)
Jumbo Frame Support	DIP switch enabled for SE2-SW5UG-T only (DIP switch II ON)**
Latency	< 10 μ s
Storage Temperature Range	-40 to +85 °C [-40 to +185 °F]
Humidity (non-condensing)	5 to 95% RH
Environmental Air	No corrosive gases permitted
Vibration, Shock & Freefall	IEC60068-2-6, -27, -32
EMI Emissions	FCC CFR47 Part 15, EN55032/CISPR32, Class A
EMS	IEC61000-4-2 (ESD): +/- 6kV (contact), +/- 8kV (air) IEC61000-4-3 (RS): 10V/m (80MHz ~ 2GHz) IEC61000-4-4 (EFT): Power Port +/- 2kV; Data Port: +/- 1kV IEC61000-4-5 (Surge): Power Port: +/- 1kV/DM, +/- 2kV/CM; Data Port +/- 1kV (+/- 2kV for 16 and 18 port models) IEC61000-4-6 (CS): 10V (150kHz ~ 80MHz)
RoHS and WEEE	RoHS (Pb free) and WEEE compliant
Packaging and Protection	Metal case, IP30
Hazardous Locations	ANSI/ISA 12.12.01-2015 & CSA 22.2 No. 213-15 (Class I, Div.2) (file #E200031);
Agency Approvals	UL/cUL 61010-1 and 61010-2-201, Class 1, Div. 2, Groups A, B, C, D, (UL file #E200031) CE

* Broadcast storm threshold value is 2 packets/100ms for 10 Mbps port or 2 packets/10ms for 100 Mbps and 1000 Mbps ports.

** DIP switch II is unused on the 10/100 models.

SC/ST Fiber Port: (100BaseFX multimode)	
Optimal Fiber Cable	50/125 or 62.5/125 μ m
Center Wavelength	1300 nm
Multimode	Links up to 4 km typ. > Transmitter power (dBm): -21 min, -17 typ, -14 max > Receiver sensitivity (dBm): -34 typ, -31 max
Nominal Max. Distance	4 km
Eye Safety (laser)	IEC 60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11

RJ45 Ports	
Port Type	Shielded RJ45
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x for 10/100 Ethernet IEEE 802.3ab, 802.3z for Gigabit Ethernet
Auto-Crossover	Yes, allows you to use straight-through or crossover wired cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	Automatic
Cable Requirements	Twisted pair (Cat5e or better) (shielded recommended)
Max. Cable Distance	100 meters

Power Details	
Power Input	Redundant Input Terminals
Input Voltage	Class 2 Power Supply: 12-48 VDC, 18-30VAC 50/60 Hz
Reverse Power Protection	Yes
Power Consumption	Refer to Stride SE2 Series Unmanaged Models table

Front Panel LEDs		
LED	State	Description
PWR1 LED	On	Power 1 connected and operational
	Off	Power 1 no voltage
PWR2 LED	On	Power 2 connected and operational
	Off	Power 2 no voltage
ACT/LNK LED	On	Indicates that there is a proper Ethernet connection (Link) between the port and another Ethernet device, but no communications activity is detected.
	Blinking	Indicates that there is a proper Ethernet connection (Link) between the port and another Ethernet device, and that there is communications activity.
	Off	Indicates that there is not a proper Ethernet connection (Link) between the port and another Ethernet device. Make sure the cable has been plugged securely into the ports at both ends.
Speed LED 10/100 Models	On	A 100 Mbps (100BaseT) connection is detected.
	Off	A 10 Mbps (10BaseT) connection is detected.
Speed LED 10/100/1000 Models	On	A 1000 Mbps (1000BaseT) connection is detected
	Off	A 100 or 10 Mbps (100BaseT or 10BaseT) connection is detected

SFP Ports	
SFP (pluggable) ports accept 1000Mbps Mini-GBIC (SFP) transceivers	
See SFP datasheet for optional fiber transceiver specification	


Stride SE2 Series Unmanaged Industrial Ethernet Switches and Media Converters

SE2 Series DIN Rail mounted switches


Dimensions

Allow 20mm [0.79"] clearance around the switch for cooling

mm [Inches]

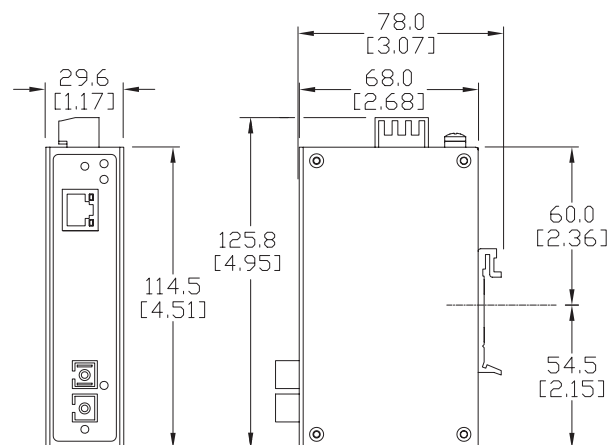


SE2-MC2U-C1-T

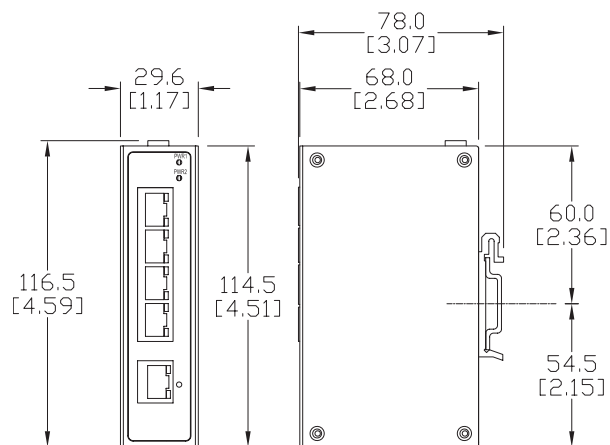

SE2-SW5U-1C1-T

SE2-SW5UG-T

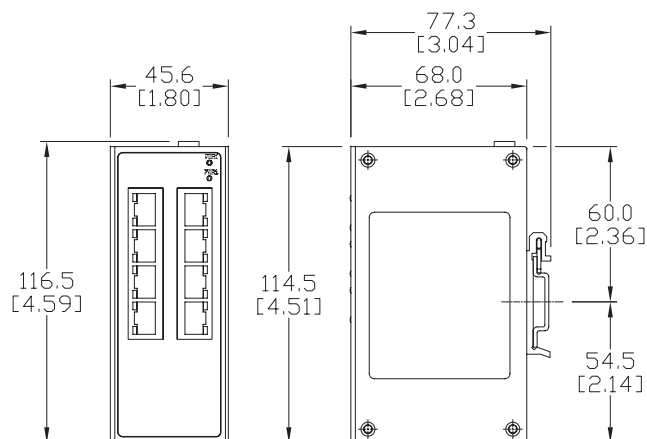

SE2-SW8U
SE2-SW8U-T

See our website: www.AutomationDirect.com for complete engineering drawings.


Stride SE2 Series Unmanaged Industrial Ethernet Switches

SE2 Series DIN Rail mounted switches

Allow 20mm [0.79"] clearance around the switch for cooling

Dimensions

mm [Inches]

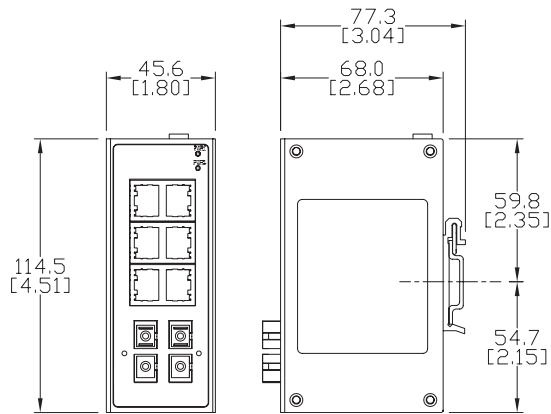

SE2-SW8U-2C1-T

See our website: www.AutomationDirect.com for complete engineering drawings.

Stride

SE2 Series Unmanaged Industrial Ethernet Switches

SE2 Series IP65 Rated



Features

- Rugged IP65 rating
- Tight M12 connections
- Wide temp range
- Panel mount
- 12, 24, 48 VDC and 18-30 VAC redundant input
- Complies with EN50155 and EN50121 industrial standards
- 5-year warranty



Stride SE2 Series IP65 Rated Models					
Part Number	Price	M12, IP65 10/100 ports	Input power (max.)	Operating Temp	Agency Approvals
SE2-SW5U-N65-T	\$354.00	5	4.6 W	-40 to +75°C [-40 to +167°F]	UL/cUL 61010-1, UL/cUL 6010-2-201 CE, EN50155, EN50121

Stride SE2 Series Unmanaged Industrial Ethernet Switches

SE2 Series IP65 Rated

General Specifications	
Operating Mode	Store and forward wire speed switching, non-blocking
Devices Supported	All IEEE 802.3 compliant devices are supported
MAC Addresses	2K
Packet Buffer	1Mbit
Packet Forwarding Rate	1.2 Mpps
Latency	< 10 μ s
Storage Temperature Range	-40 to +85 °C [-40 to +185 °F]
Humidity (non-condensing)	5 to 95% RH
Pollution Degree	2
Vibration and Shock	IEC60068-2-6, -27, -32
Freefall	IEC60068-2-32
Safety	EN60950-1
EMI Emissions	FCC CFR47 Part 15, EN55032/CISPR32, Class A
EMS	IEC61000-4-2 (ESD): \pm 6kV (contact), \pm 8kV (air) IEC61000-4-3 (RS): 20V/m (80MHz ~ 2 GHz) IEC61000-4-4 (EFT): Power Port \pm 2kV; Data Port: \pm 2kV IEC61000-4-5 (Surge): Power Port: \pm 1kV/DM, \pm 2kV/CM IEC61000-4-6 (CS): 10V (150 kHz ~ 80 MHz) IEC61000-4-8 (Power frequency magnetic field) :50 Hz 100A/m IEC61000-4-9 (Pulsed magnetic field) :300A/m IEC61000-4-29 (Voltage short interruptions) :10ms 100%
RoHS and WEEE	RoHS (Pb free) and WEEE compliant
Packaging and Protection	Metal case, IP65
Agency Approvals	UL/cUL 61010-1 UL/cUL 61010-2-201, (UL file #E157382), CE, EN50155, EN50121

Power Details	
Power Input	Redundant Input M12 connector
Input Voltage	Class 2 Power Supply: 12-48 VDC, 18-30VAC 50/60 Hz
Power Input Ports	M12, male, A-coding, 4-pin
Reverse Power Protection	Yes

M12 Ports	
10/100BaseT ports	M12, female, D-coding, 4-pin
Ethernet Compliance	IEEE 802.3i, 802.3u, 802.3x
Auto-Crossover	Yes, allows you to use straight-through or crossover wired cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	Automatic
Cable Requirements	Twisted pair (Cat5 or better) (shielded recommended)
Max. Cable Distance	100 meters

*Note-M12 caps (ZP-JBH-CAP) need to be used on open (disconnect) ports.


Front Panel LEDs		
LED	State	Description
Power 1 LED	On	Power 1 connected and operational
	Off	Power 1 no voltage
Power 2 LED	On	Power 2 connected and operational
	Off	Power 2 no voltage
Ethernet Port Connection Status LED	On	Ethernet port connected
	Blinking	Ethernet port active
	Off	Ethernet port no connection

Stride SE2 Series Unmanaged Industrial Ethernet Switches

SE2 Series IP65 Rated

Dimensions


mm [Inches]

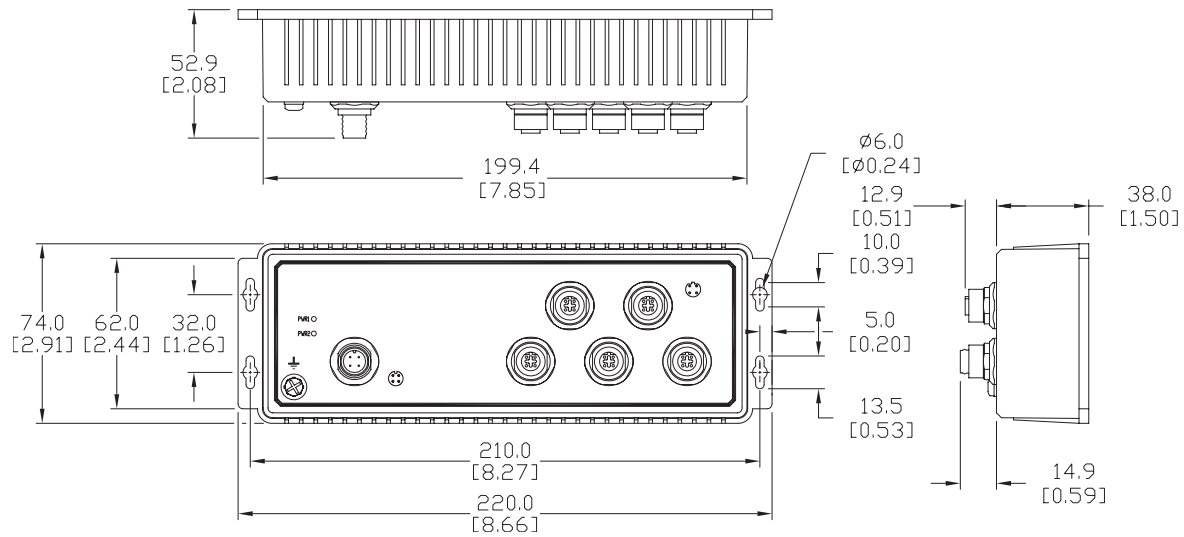

SE2-SW5U-N65-T

See our website: www.AutomationDirect.com for complete engineering drawings.

Stride SE Series Unmanaged Industrial Ethernet Switches and Media Converters



Features

- Wide temp range option
- Integrated panel mounting option
- 12, 24 VDC redundant input
- IP40 metal case models
 - IP30 plastic case models
- Haz Loc
- 5-year warranty



IECEX



RoHS Compliant

Plastic Case Switches

Stride SE Series Unmanaged Models						
Part Number	Price	10/100	Fiber Connector	Input Power	Operating Temp	Agency Approvals
<u>SE-SW5U</u>	\$129.00	5	–	2.0 W	-10 to +60°C [+14 to +140°F]	UL/cUL 508, Haz Loc, CE
<u>SE-SW8U</u>	\$219.00	8	–	4.0 W		
<u>SE-SW5U-ST</u>	\$249.00	4	1 ST	3.0 W		
<u>SE-SW5U-SC</u>	\$239.00		1 SC			
<u>SE-SW9U-ST</u>	\$329.00	8	1 ST	5.0 W		
<u>SE-MC2U-ST</u>	\$238.00	1	1 ST	2.0 W		
<u>SE-MC2U-SC</u>	\$235.00		1 SC			

Metal Case Switches

Stride SE Series Unmanaged Models						
Part Number	Price	10/100	Fiber Connector	Input Power	Operating Temp	Agency Approvals
<u>SE-SW5U-WT</u>	\$231.00	5	–	2.0 W	-40 to +85°C [-40 to +185°F]	UL/cUL 508, Haz Loc, CE
<u>SE-SW8U-WT</u>	\$299.00	8	–	4.0 W		
<u>SE-SW5U-ST-WT</u>	\$329.00	4	1 ST	3.0 W		
<u>SE-SW5U-SC-WT</u>	\$329.00	4	1 SC			
<u>SE-SW9U-ST-WT</u>	\$419.00	8	1 ST	5.0 W		
<u>SE-SW9U-SC-WT</u>	\$409.00	8	1 SC			

Stride SE Series Unmanaged Industrial Ethernet Switches and Media Converters

General Specifications		
Ethernet Switch Type	Up to 9 ports	
Operating Mode	Store and forward wire speed switching, non-blocking	
Devices Supported	All IEEE 802.3 compliant devices are supported	
Standards	IEEE 802.3, 802.3u, 802.3x	
MAC Addresses	1024 addresses	
Memory Bandwidth	3.2 Gbps	
Latency for 10 Mbps ports	16 μ s + frame time (typical)	
Latency for 100 Mbps ports	5 μ s + frame time (typical)	
Power Input	Redundant Input Terminals	
Input Power (typical with all ports active at 100 Mbps)	SE-MC2U-ST SE-MC2U-SC SE-SW5U SE-SW5U-WT	2.0 W
	SE-SW5U-ST SE-SW5U-SC SE-SW5U-ST-WT SE-SW5U-SC-WT	3.0 W
	SE-SW8U SE-SW8U-WT	4.0 W
	SE-SW9U-ST SE-SW9U-ST-WT SE-SW9U-SC-WT	5.0 W
Input Voltage	10-30 VDC (continuous)—Class 2 Power Supply	
Reverse Power Protection	Yes	
Transient Protection	15,000 watts peak	
Spike Protection	5,000 watts (10x for 10 us)	
Ethernet Isolation	1500 VRMS 1 minute	
Operating Temperature Range	SE-MC2U-ST SE-MC2U-SC SE-SW5U SE-SW8U SE-SW5U-ST SE-SW5U-SC SE-SW9U-ST	-10 to +60°C [+14 to +140°F], cold startup at -10°C [+14°F]
	SE-SW5U-WT SE-SW8U-WT SE-SW5U-ST-WT SE-SW5U-SC-WT SE-SW9U-ST-WT SE-SW9U-SC-WT	-40 to +85°C [-40 to +185°F], cold startup at -40°C [-40°F]
Storage Temperature Range	-40 to +85°C [-40 to +185°F]	
Humidity (non-condensing)	5 to 95% RH	
Environmental Air	No corrosive gasses permitted. For use in Pollution Degree 2 environment	
Vibration and Shock	IEC60068-2 and -27	
EMI Emissions	FCC part 15, ICES-003, EN55022	
EMC Immunity	IEC61326-1	
RoHS and WEEE	RoHS (Pb free) and WEEE compliant	
Agency Approvals	UL/cUL 508, CSA C22 per EN61010-1, UL HazLoc (Class 1, Div. 2, Groups A, B, C, D) (UL file #E200031), CSA C 22.2/213/EN60079-15 (Zone 2, Category 3), CE (ATEX)	

General Specifications Cont'd		
Packaging and Protection	SE-MC2U-ST SE-MC2U-SC SE-SW5U SE-SW8U SE-SW5U-ST SE-SW5U-SC SE-SW9U-ST	UL94VO Lexan, IP30
	SE-SW5U-WT SE-SW8U-WT SE-SW5U-ST-WT SE-SW5U-SC-WT SE-SW9U-ST-WT SE-SW9U-SC-WT	Metal case, IP40

Copper RJ45 Ports: (10/100BaseT)	
10/100BaseT ports	Shielded RJ45
Protocols Supported	All standard IEEE 802.3
Ethernet Compliance	IEEE 802.3, 802.3u, 802.3x
Auto-Crossover	Yes, allows you to use straight-through or crossover wired cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating	Yes, 10BaseT and 100BaseT
Auto-Polarity	Yes, on the TD and RD pair
Flow Control	Automatic
Ethernet Isolation	1500 VRMS 1 minute
Plug and Play	Yes
Cable Requirements	Twisted pair (Cat5e or better) (shielded recommended)
Max. Cable Distance	100 meters

Fiber Port: (100BaseFX multimode)	
100BaseFX Ports	1
Fiber Port Mode	Multimode (mm)
Fiber Port Connector	ST – models SE-XXXX-ST and SE-XXXX-ST-WT SC – models SE-XXXX-SC and SE-XXXX-SC-WT
Optimal Fiber Cable	50/125 or 62.5/125 μ m
Center Wavelength	1300 nm
Multimode	Links up to 4 km typ.; > Transmitter power (dBm): -21 min, -17 typ, -14 max > Receiver sensitivity (dBm): -34 typ, -31 max
Nominal Max. Distance (full duplex)	4 km
Ethernet Compliance	100BaseFX
Eye Safety (laser)	IEC 60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11






Complete documentation

Documentation can be downloaded from www.automationdirect.com.

Stride SE Series Unmanaged Industrial Ethernet Switches and Media Converters

Dimensions





Inches [mm]

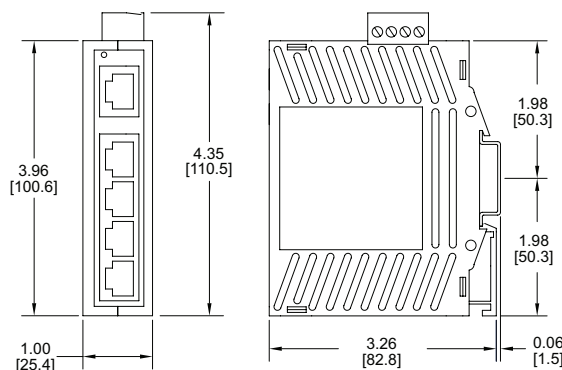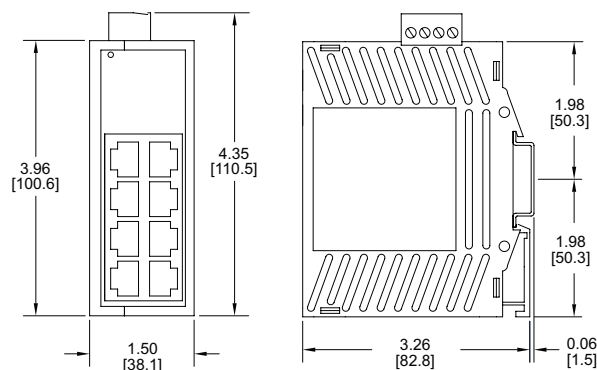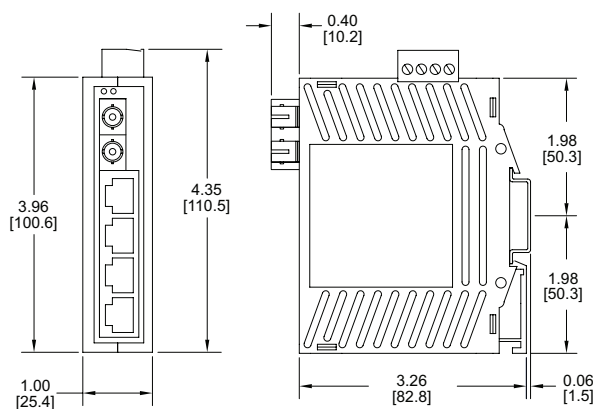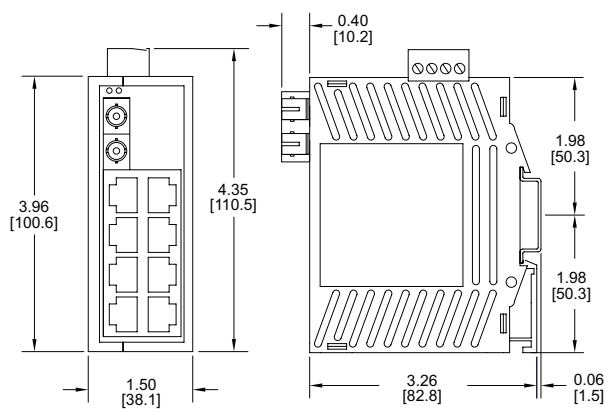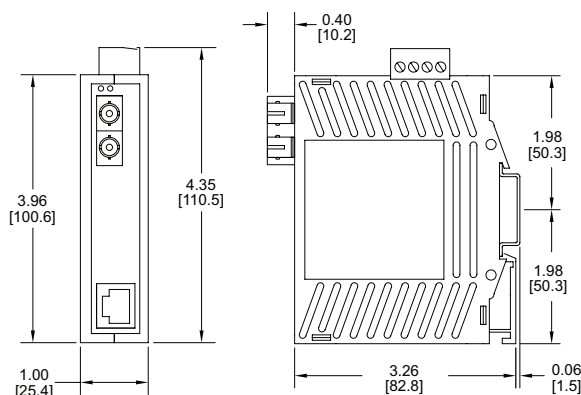**SE-SW5U****SE-SW8U****SE-SW5U-SC**
SE-SW5U-ST**SE-SW9U-ST****SE-MC2U-SC**
SE-MC2U-STSee our website: www.AutomationDirect.com for complete engineering drawings.

Stride SE Series Unmanaged Industrial Ethernet Switches and Media Converters

Dimensions

Inches [mm]

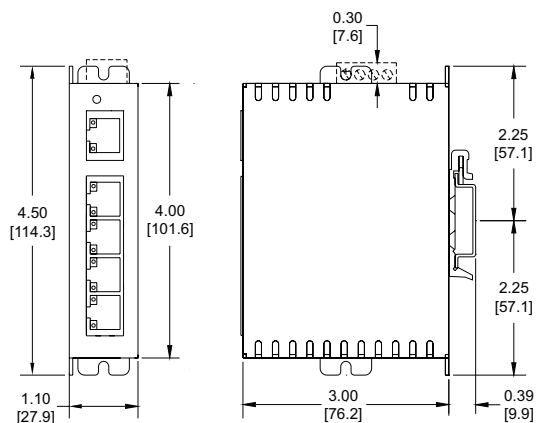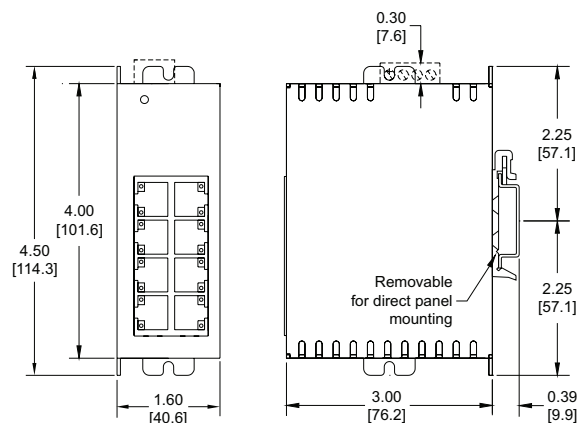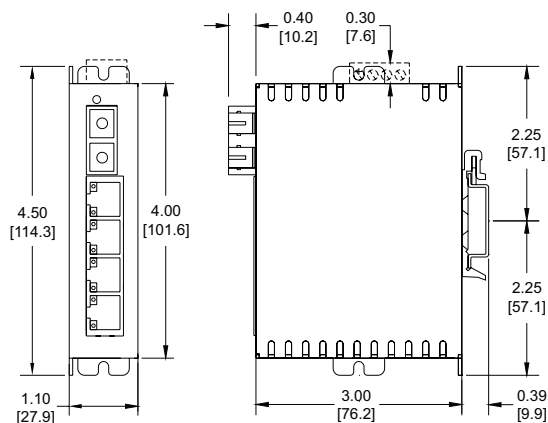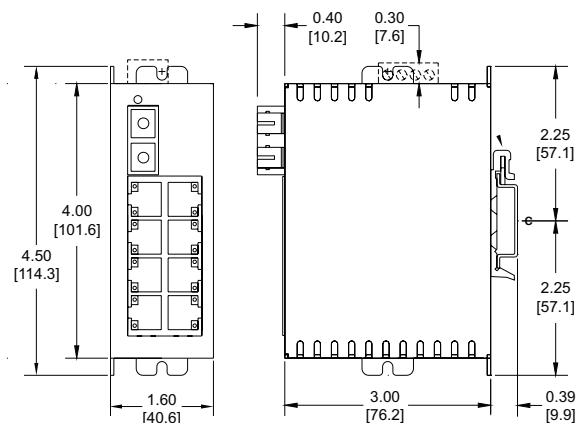**SE-SW5U-WT****SE-SW8U-WT****SE-SW5U-SC-WT**
SE-SW5U-ST-WT**SE-SW9U-SC-WT**
SE-SW9U-ST-WTSee our website: www.AutomationDirect.com for complete engineering drawings.

MB-GATEWAY Modbus TCP/IP to RTU Gateway

MB-GATEWAY

\$262.00

AutomationDirect's MB-GATEWAY is a single port Modbus Gateway module that converts Modbus TCP to Modbus RTU. It supports up to 12 simultaneous Modbus TCP Client (master) Ethernet connections, and up to 128 RTU Server (slaves) serial connections. MB-GATEWAY requires 10VDC to 36VDC from an external power supply. Each module has one RJ45 10/100 Mbps Ethernet port and one RS-422/485 2 or 4-wire serial port. It supports NetEdit* or Web Browser based configuration tools.

Key features

- Automatic read function
- RJ45 10/100 Mbps Ethernet port
- RS-422/485 2 or 4 wire serial port
- Supports NetEdit* and Web browser configuration tools
- Auto detects Ethernet cable types (MDI/MDX)
- 35 mm DIN rail mount




*NetEdit version 3.8 or later is required to support MB-GATEWAY.

Specifications		
Ethernet Interface	Port	RJ-45
	Speed	10/100 Mbps
	Protection	Built-in 1.5 KV magnetic isolation
	Protocol Supported	Modbus TCP/IP Server (Slave)
	Clients (Masters) Supported	12 simultaneous Modbus TCP connections
Serial Interface	Cable Type	Auto detects Ethernet cable types (MDI/MDX)
	Port	6-position terminal strip (Phoenix #1863194) provided
	Supported Signal Lines	RS-422 (5-wire) Signals: TX+, TX-, RX-, RX+, GND RS-485 (3-wire) Signals: Data+, Data-, GND
	Supported Baud Rates	300*, 600*, 1200*, 4800, 9600, 14.4k, 19.2k, 38.4k, 57.6k, 115.2k *Cannot be set with DIP switches. Must be set via Web browser configuration.
	Parity	Odd, Even, None
	Data Bits	8
	Stop Bits	1, 2
	Protocol Supported	Modbus RTU Client (Master)
	Servers (Slaves) Supported	128
	Termination	Permanently installed 120Ω resistor between Data+ and Data-

Specifications	
Power Consumption	2W Use Class 2 power supply Use conductors rated 60/75°C 3-position terminal strip (Phoenix #1863165) provided
Wire Range	16–28AWG Solid or Stranded Conductor (1.5 mm ²)
Wire Strip Length	0.24–0.27 in [6–7 mm]
Screw Torque	1.7 lb-in [0.2 N·m]
Operating Temperature Range	0 to 60°C [32 to 140°F]
Storage Temperature Range	-20 to 70°C [-4 to 158°F]
Humidity	5 to 95% RH (non-condensing)
Environmental Air	For use in Pollution Degree 2 Environment
Vibration	MIL STD 810C 514.2
Shock	MIL STD 810C 516.2
Weight	0.2 lbs [0.09 kg]
Agency Approval	UL (file #E185989), CE


Dimensions

Inches [mm]

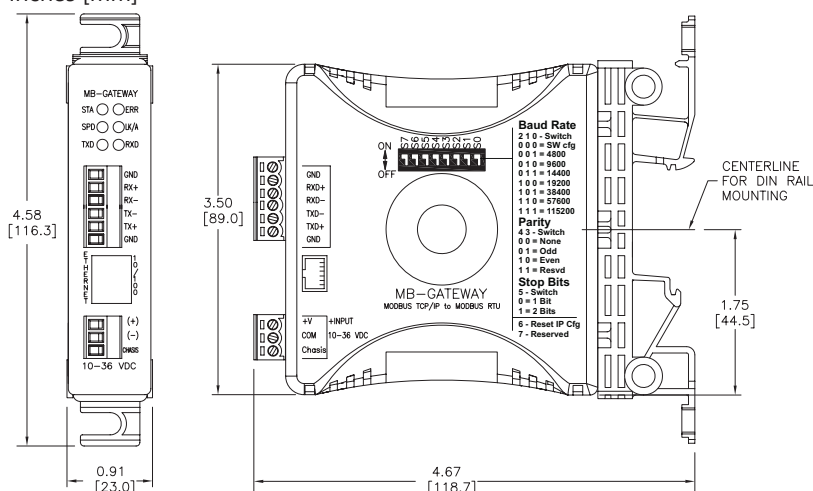

See our website: www.AutomationDirect.com for complete engineering drawings.

www.automationdirect.com

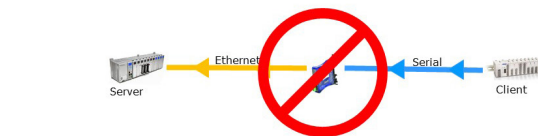

Replacement Part

Part Number	Description	Price
MB-GW-CON	MB-Gateway-Connector Kit 1ea: Phoenix 3 pin power connector AND 1 ea: Phoenix 6 pin serial connector	\$20.00



Communication Products

tCMP-30

FA-ISOCON Universal Isolated Network Adapter



FA-ISOCON \$166.00

The FA-ISOCON Universal Isolated Network Adapter is used to place RS-232 devices such as PLCs, operator interfaces, industrial computers, etc., on an RS-422 or RS-485 multidrop network. The Network Adapter converts RS-232 signal levels to isolated RS-422 or RS-485 signal levels. This network adapter is similar to our other RS-232/422 converters, but it offers the added benefit of network isolation. This adapter is especially useful in noisy environments where data corruption due to induced noise is possible.

The FA-ISOCON features Automatic Network Transmitter Enable (ANTE) so that an RTS output is not required on the connected RS-232 device. The FA-ISOCON is a direct functional replacement for the FA-ISONET when CTS Controlled Transmit Enable (CCTE) mode is active. Having both ANTE and CCTE modes, the FA-ISOCON is compatible with most RS-232 devices.

The diagram below shows a simple example of an FA-ISOCON used for PC to multiple PLC communications.

Key features

Following are some of the key features and benefits of the FA-ISOCON:

- DIP switch selectable Automatic Network Transmitter Enable so that an RTS output is not required on the connected RS-232 device.
- DIP switch selectable CTS Controlled Transmit Enable mode for backwards compatibility with the FA-ISONET.
- DIP switch select termination and bias resistors; short/open TXD+/RXD+ and TXD-/RXD- terminals for 1/2 duplex comm.
- Isolation removes ground loop currents from data lines. Noise voltages resulting from transformer-like coupling are also eliminated.
- Many forms of radiated noise are reduced to negligible levels.
- FA-ISOCON can be powered from 24 VDC or 5 VDC. (Unit may be powered directly from CPU pins on CPUs with +5V pins or the auxiliary 24 VDC power supply on I/O bases.)
- Unit has RS-232 transmit and receive LEDs and an RS-422/485 Transmitter Enable LED to simplify troubleshooting.

RJ12 port allows you to use the modular cables (included) to quickly connect the D0-05xx, D2-240 or D3-340 to the FA-ISOCON. Connections can be made to the D3-350, DL405 CPUs and PCs with the connectors that are included.

Specifications


- Max. network distance: 4000 feet
- Max. number of devices: 32 per network
- Max. baud rate: 115.2 Kbaud
- Supply voltage: 5 VDC @ 100 mA max. (from CPU) or 24 VDC @ 70 mA (external source)
- Max. driver load: 62 ohms
- Driver voltage: $\pm 1.5V$ minimum
- No load current: 80 mA
- Max. current: 100 mA (62 h)
- Isolation resistance: $> 1014 \text{ h/7pF}$
- Voltage withstand: 1.2 KVrms/1s
1.0 KVrms/1 minute
- Operating temp: 0 to 60°C [32 to 140°F]

Installation is a 'snap'

The FA-ISOCON comes with an attached DIN rail connector. Simply hook the top of the DIN connector on the DIN rail, then pull the unit down and rotate the bottom of the DIN connector onto the DIN rail (or use the provided holes to flush-mount it on a panel). The adapter's RJ12 serial port can be connected to a PC or a DirectLogic CPU port using one of the supplied cables/connectors. Or, use the adapter's RS-232 terminal block to connect to a serial device. Connect the RS-422/485 communications wiring to the convenient RS-422/485 terminal blocks.

Adapter components

- FA-ISOCON Isolated Network Adapter with attached DIN mounting bracket
- 25-pin male to RJ12 6P6C connector
- 9-pin female to RJ12 6P6C connector
- 1' cable with RJ12 6P6C plug to RJ11 4P4C plug for use with D3-340.
- 1' cable with RJ12 6P6C plug to RJ12 6P6C plug

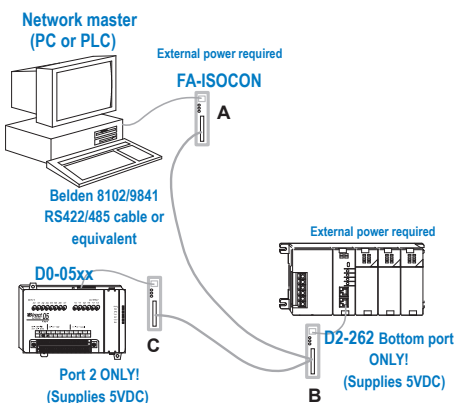


- FA-ISOCON converts the network master's (computer or PLC, etc.) RS-232 communication signal levels to RS-422/485.
- FA-ISOCON converts the RS-422/485 signal levels back to RS-232 for a connection to the D2-262 CPU bottom port.
- FA-ISOCON converts the RS-422/485 signal levels back to RS-232 for a connection to the D0-05xx CPU port 2.

**Dimensions including DIN bracket and terminal block.
HxWxD (4.55" x 0.90" x 4.69")**



Removable terminal blocks make it easy to connect communication wiring.
(Replacement terminal plug kit FA-ISOCON-P)

F2-UNICON Universal Converter

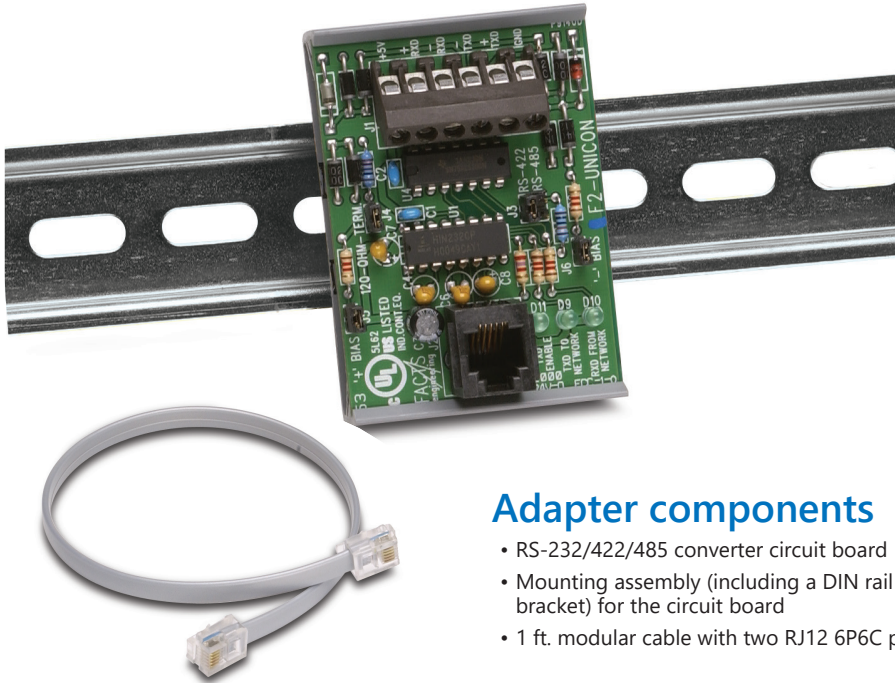

General specifications

- Max. network distance: 4000 feet
- Max. baud rate: 19.2 Kbaud
- Supply voltage: 5 VDC (from CPU)
- Max. driver load: 62 h
- Driver voltage: $\pm 1.5V$ minimum
- No load current: 65 mA
- Max. current: 100 mA
- Operating temp: 60°C [140°F]
-

Example of system using F2-UNICON

- F2-UNICON converts the network master's (computer) RS-232 communications card signal levels to RS-422/485, which is suitable for a multi-drop network.
- F2-UNICON converts the RS-422/485 signal levels back to RS-232 for a connection to the [D2-262](#) CPU bottom port.
- F2-UNICON converts the RS-422/485 signal levels back to RS-232 for a connection to the [D2-262](#) CPU bottom port.
- F2-UNICON converts the RS-422/485 signal levels back to RS-232 for a connection to the DL05 port 2


F2-UNICON \$123.00

The F2-UNICON Universal Converter converts RS-232 signal levels to RS-422 signal levels or RS-422 signal levels into RS-232 signals. The F2-UNICON does not offer the benefit of network isolation that the FA-ISOCOCON offers. The F2-UNICON has been specifically designed to be used with the DL05 and [D2-262](#) CPUs. It offers features such as:

- Easily mounts to DIN rail
- Does not require an external power source. It obtains power from the +5V pin on the D2-262 CPU port (bottom port) and the DL05 (port 2).
- Has transmit and receive LEDs to simplify troubleshooting.

Installation is a "snap"

The F2-UNICON comes with a DIN rail housing for the circuit board. Simply snap the board into the housing and mount it on a DIN rail (or flush-mount it on a panel). Connect the communications wiring to the convenient terminal blocks, then connect the adapter to the CPU port with the cable.

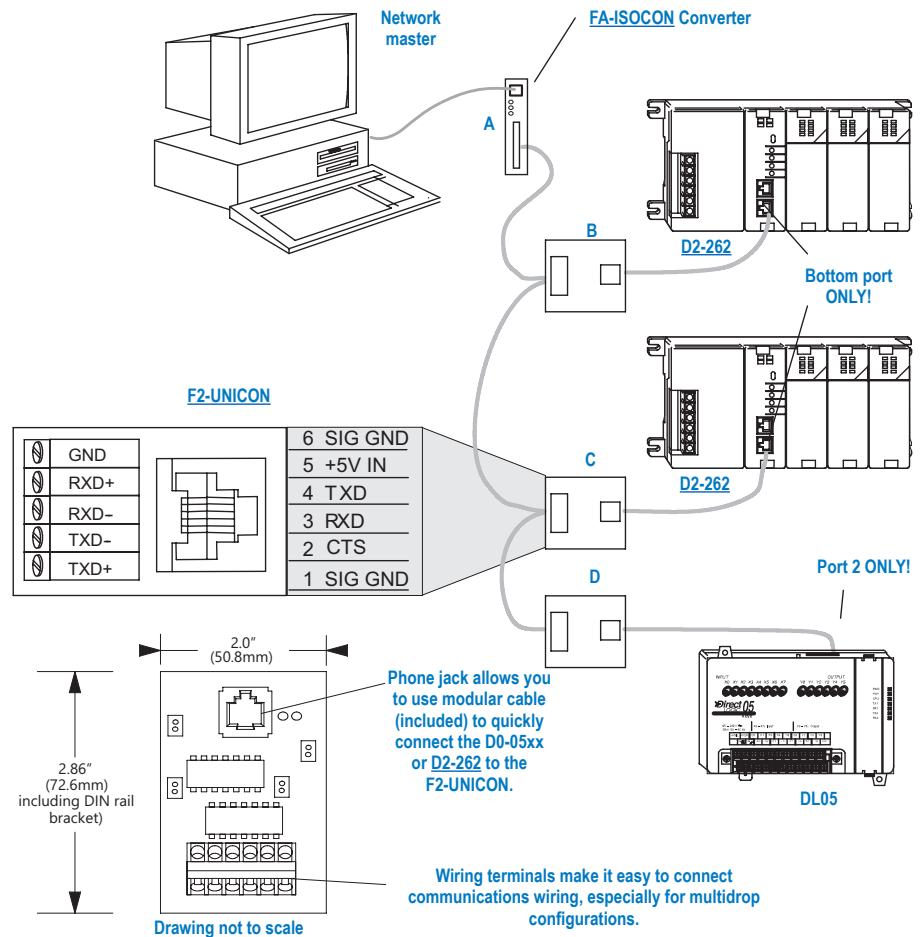

FA-CABKIT Universal Cable Kit

FA-CABKIT \$71.00


The Universal Cable Kit (FA-CABKIT) allows you to connect various types of **Direct**LOGIC™ products with an RS-232 cable in a matter of minutes. The kit consists of two phone cables (with male plugs already attached) and several specially wired connectors. The special connectors are a D-sub style with built-in female phone jacks. This kit, with its wide variety of special connectors, allows for easy connections to many different products from each of the **Direct**LOGIC product families. The individual pieces of the kit are not sold separately except for the FA-15HD high density 15-pin connector.

Note: For D-sub to terminal block adapters, see the Wiring Solutions section

Follow these simple steps to use the cable kit:

1. Plug the proper universal connector (or cable) into the appropriate communication port of the host product (CPU, DCM, CoProcessor module, personal computer, operator interface, etc.).
2. Plug the proper universal connector onto the other device to be connected to the host system : (DL05, DL06, DL105, DL205, DL305, DL405, CoProcessor module, PC communication card, etc.).
3. Connect the universal cable between the two connectors.
4. Verify that the circuit you created is correct before applying power.


WARNING: This cable system is designed for temporary testing situations and should not be used in actual applications. This cable is not shielded and is susceptible to electrical noise. Electrical noise can cause unpredictable operation that may result in a risk of personal injury or damage to equipment.

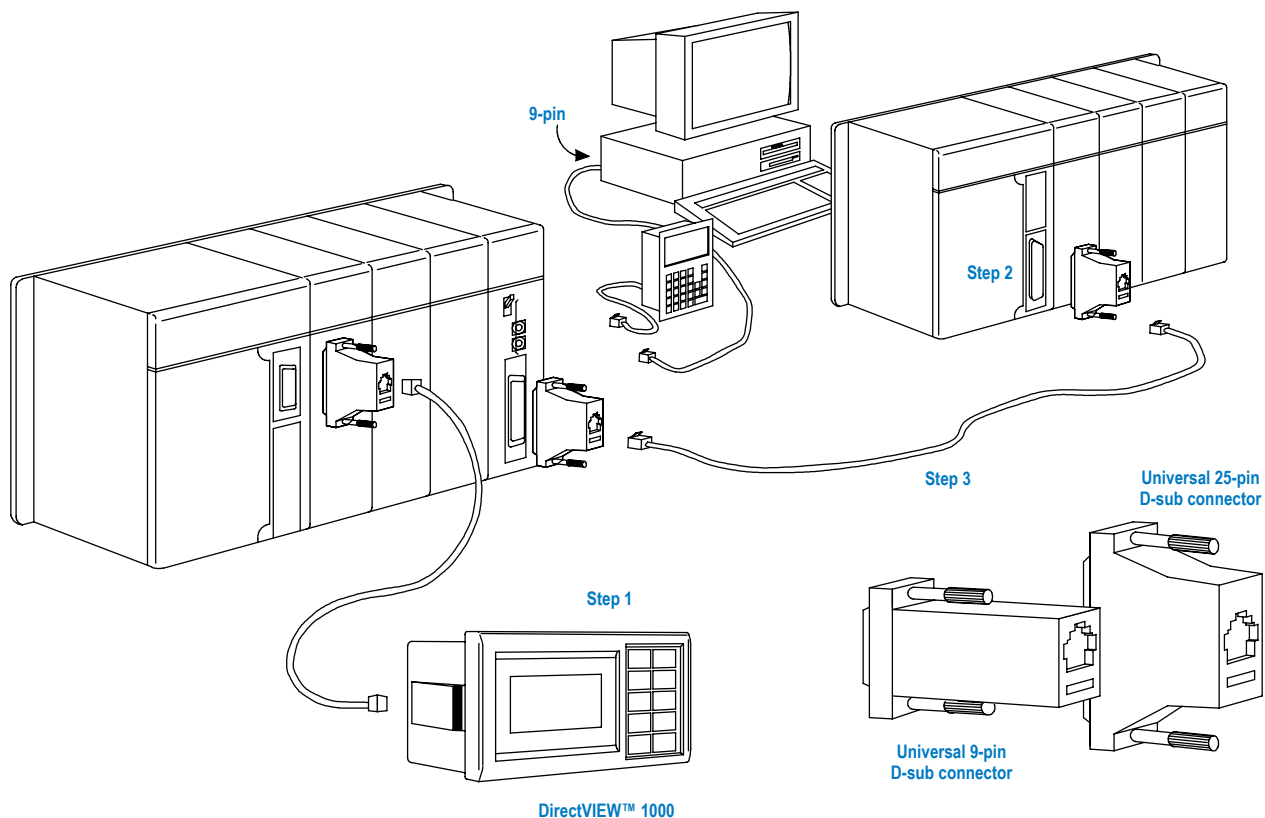


FA-CABKIT Universal Cable Kit

The table lists various devices that can be connected quickly with the universal cable kit. To determine which parts you need to use, simply use the table to find the connection you wish to make. Then match each device required for that connection with its part number. Snap the pieces together and you're ready to communicate. The following seven parts are included in the Universal Cable Kit. These parts are not sold separately, except for the FA-15HD high density 15-pin connector.


1. Standard phone-style connectors (RJ12), non-shielded



2. Standard phone and handset style connectors (RJ12, RJ11), non-shielded




3. Universal 9-pin female D-sub connector




Standard
RJ12
phone jack

4. Universal 9-pin male D-sub connector




Standard
RJ12
phone jack

5. Universal 15-pin male D-sub connector




Standard
RJ12
phone jack

6. Universal 25-pin male D-sub connector



Standard RJ12
phone jack

7. Universal 15-pin HD male D-sub connector (FA-15HD)



Standard RJ12
phone jack

Universal cable kit

Items included in the universal cable kit

Device Description

1. 7 ft. standard cable, 6P6C to 6P6C phone type
2. 6 ft. adapter cable, 6P6C to 4P4C phone type
3. AT connector 9-pin female to 6P6C connector
4. (ASCII BASIC module) 9-pin male connector to 6P6C connector
5. DL405 15-pin male connector to 6P6C connector
6. DL405 CPU and DCM 25-pin male connector to 6P6C connector
7. DL06, D2-250(-1) and D2-260 CPUs 15-pin HD male connector to 6P6C connector

Common connection examples

DL05, DL06, DL105, DL205, D3-350 and (D4-450 port 2)

CPU connections

Connection desired

1. DL05/06/105/205/DL350/D4-450 to AT type computer 9-pin
2. CPU to DV-1000
3. CPU to DL205 or DL405 DCM
4. CPU to DL340 CPU
5. CPU to ABM (DL205 only)

Devices required

- 1,3
1
1,6
2
1,4

DL06, D2-250(-1), D2-260 CPU port 2 connections

Connection desired

1. DL06/250(-1)/260 port 2 to AT type computer 9-pin
2. DL06/250(-1)/260 port 2 to DV-1000

Devices required

- 1,3,7
1,3,7

DL305 D3-232-DCU connections

Connection desired

1. DCU to AT type computer 9-pin
2. DCU to DL405 series DCM (requires 2 kits)
3. DCU to DL340 CPU
4. DCU to ABM

Devices required

- 1,6,3
1,6,6
2,6
1,6,4

DL305 CPU connections

Connection desired

1. DL340 CPU to AT type computer 9-pin
2. DL340 CPU to DL405 series CPU/DCM
3. DL340 CPU to DL240 CPU
4. DL340 to ABM
5. DL340 CPU to DCU CPU

Devices required

- 2,3
2,6
2
2,4
2,6

DL405 CPU (15-pin) top port connections

Connection desired

1. DL405 CPU to AT type computer 9-pin
2. DL405 CPU to DV-1000

Devices required

- 1,5,3
1,5

DL405 CPU (25-pin) bottom port connections

Connection desired

1. DL405 CPU to AT type computer 9-pin
2. DL405 CPU to DL405 series DCM (requires 2 kits)
3. DL405 CPU to DL340 CPU
4. DL405 CPU to ABM

Devices required

- 1,6,3
6
2,6
1,6,4

USB Programming Cables

USB Cables

AutomationDirect's high quality USB cables are used to connect USB devices to a USB port on a PC. Each cable has Standard-A plug to Standard-B plug end connectors, both gold plated, and meet the USB 2.0 requirements. These cables can be used for programming Productivity Series CPUs, **C-more** panels, certain **C-more** Micro panels and PC to touchscreen connections for Atlas Industrial Monitors that include touchscreen capability.



Standard A to standard B



Part Number	Description	Price
<u>USB-CBL-AB3</u>	3-ft [0.9 meter] Standard USB 2.0 cable with Standard-A plug to Standard-B plug. Suitable for all USB devices.	\$12.00
<u>USB-CBL-AB6</u>	6-ft [1.8 meter] Standard USB 2.0 cable with Standard-A plug to Standard-B plug. Suitable for all USB devices.	\$16.00
<u>USB-CBL-AB10</u>	10-ft [3 meter] Standard USB 2.0 cable with Standard-A plug to Standard-B plug. Suitable for all USB devices.	\$36.50
<u>USB-CBL-AB15</u>	15-ft [4.6 meter] Standard USB 2.0 cable with Standard-A plug to Standard-B plug. Suitable for all USB devices.	\$42.50

Standard A to micro B



Part Number	Description	Price
<u>USB-CBL-AMICB6</u>	Programming cable, USB A to micro-B USB, 6ft cable length.	\$5.25
<u>USB-CBL-AMICB15</u>	Programming cable, USB A to micro-B USB, 15ft cable length.	\$10.50

Standard A to Standard C



Part Number	Description	Price
<u>USB-CBL-AC6</u>	Programming cable, USB A to USB C, 6ft cable length.	\$7.00



- Productivity Series CPUs
- **C-more** panels
- **C-more** Micro panels
- Atlas Industrial Monitors with touchscreen capability.

USB to RS-232 Converter

USB-RS232 \$37.00

This quality USB to RS-232 converter transparently connects serial devices to PC applications via a USB port. It is perfect for the user needing to connect to a serial port-based peripheral from a laptop PC with an available USB port but no serial port. The adapter driver creates a virtual serial port (using the next available COM number). Applications connect to the virtual COM port as if it were a standard serial port. The USB-serial conversion is completely transparent to the peripheral device.



Features:

- Flexible cable
- Premium quality
- Gold connectors
- Ergonomic molding for easy connection
- Foil and braid shielding to reduce EMI/RFI interference
- Designed for high-speed transmissions
- LED power and TX/RX indicators
- Mates with PC DB9 serial cables (such as our [D2-DSCBL PLC cable](#))
- 2 hex nuts included

Specifications:

- RS-232 standard
- Powered by the USB bus
- DB 9 male connector
- USB A male connector
- 6ft [1.8m] cable
- USB 2.0 compliant
- Plug and Play

Operating Systems:

- Windows 11
- Windows 10
- Windows 8.1–64-bit, 32-bit
- Windows 8–64-bit, 32-bit
- Windows 7–64-bit, 32-bit
- Windows XP

Compatible with AutomationDirect's:

- **DirectLOGIC** PLCs (**DirectSOFT** 3.0C build 80 and later versions)
- Optimate panels (OP-WINEDIT software)

Hardware Requirements:

- One available USB port
- If the RS232 port on your device is not a nine pin female, you will need an additional adapter. USB-RS232 converter is a nine-pin male connector.



USB to RS-485 PC Adapter

USB-485M \$60.00

Convenient 2-wire USB to RS-485 serial communication adapter for universal RS-485 use (GS drives, SureServo servos, Solo temperature controllers, CLICK PLCs, etc.). Does not require an external power supply or complicated configuration process.

Features:

- Type A (plug) USB connector
- Universal female RJ45/RJ12 modular connector (accepts RJ12 & RJ45 plugs)
- Supports multiple baud rates
- USB v2.0 compliant
- RoHS compliant
- CE compliant

Components Included:

- Adapter
- Cable – 6-wire RJ12 crossover; 2m [79 in] (for plug & play connectivity to GS drives)
- Cable – 2-wire RJ12–flying leads; 2m [79in] (for universal RS-485 connectivity to SureServo, Solo, etc.)

Specifications	
Description	USB TO RS-485 PC Adapter; includes (2) RJ12 cables, mini-CD with driver, instructions
Component Compatibility *	GS series AC drives – GS-OFT configuration software GS series AC drives – Modbus polling SureServo servo drives – SV-PRO configuration software** SureServo servo drives – Modbus polling** SOLO process controllers – SL-SOFT configuration software SOLO process controllers – Modbus polling CLICK PLCs – Modbus polling Productivity PLCs – Modbus polling
Power Supply	No external power supply needed
Power Consumption	0.4 W
Voltage Isolation	3000 VDC
Baud Rates Supported	75, 150, 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 (bps)
Transmission Type	RS-485 half-duplex (2-wire)
LED Display	Steady Green LED ON: power is ON. Blinking orange LED: data is transmitting.
USB Connector	Type A (plug)
RS-485 Connector	RJ45
Compatibility	USB v2.0 specification
PC Compatibility	Windows Operating System required for bridge & driver installation: 32-bit driver: Windows 7, 8, 8.1, 10 64-bit driver: Windows 7, 8, 8.1, 10

* NOT compatible with DirectSOFT PLC software.


(DirectSOFT RS-485 programming requires 4-wire full-duplex data transmission.)

** Requires SVC-485CFG-CBL-2 cable.


USB-485M



USB-485M Dimensions



UNITS:
mm [in]



USB-485M RJ-45 Pin-out



8 ← 1



RJ-45

Pinout	
Pin	Description
1	reserved
2	reserved
3	reserved
4	SG+
5	SG-
6	reserved
7	reserved
8	reserved

Ethernet Patch Cables

Cat5e STP Ethernet Patch Cables

Connectivity

Ethernet is a networking technology that includes the protocol, port, cable, and computer chip needed to interconnect intelligent devices on to a local area network.


Designed for Industrial Use

The noise interference radiated from electrical components that is often associated with factory floor environments can result in partial or complete data loss. This may result in delays or complete communication loss in extremely noisy environments.

Our Ethernet patch cables are designed to reduce the effects of (EMI) electromagnetic interference by incorporating a single metal foil shield that wraps around the entire set of 8 wires in the Cat5e cable. The RJ45 connectors are also shielded against electrical interference and designed to be robust. Our 350 MHz cables exceed all Cat5e TIA/EIA standards, and drastically reduce both impedance and structural return loss (SRL) when compared to standard 100 MHz cables.




The cables comply with the PoE+ standard to deliver an enhanced 30W of power.

With several colors and lengths to choose from at great pricing, these cables should help you in creating solid, reliable Ethernet networks with any application.

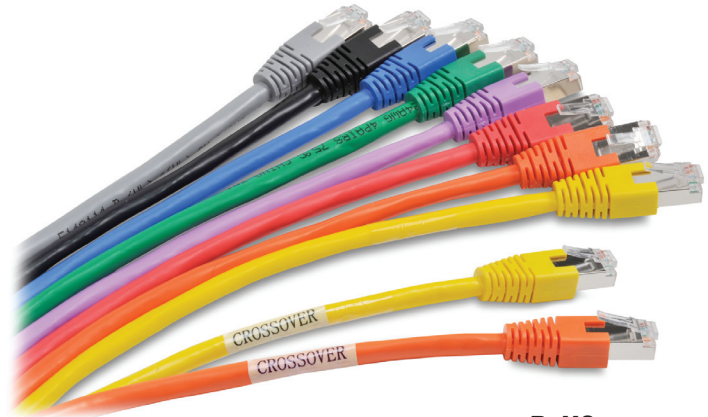

Features

- Connector; 50-micron gold plated RJ45 male plugs
- Conductor; 4-pair 24 AWG stranded copper
- Overall foil shielded cable for industrial applications
- Crossover cables have "crossover" label on each end.
- Exceeds Category 5e specifications, 350MHz
- 30W Power over Ethernet (PoE+)
- Multiple lengths and colors
- CM rated, suitable for general use other than plenum spaces
- RoHS compliant

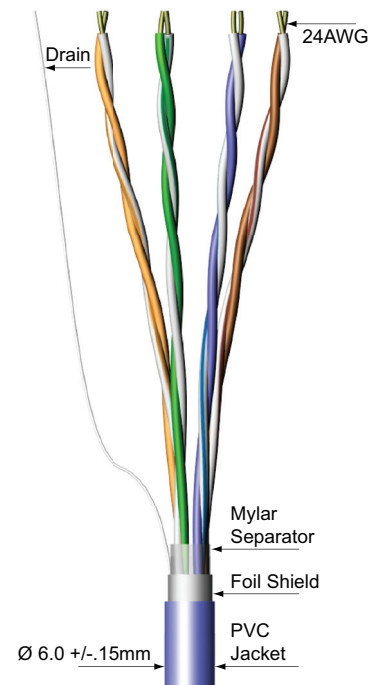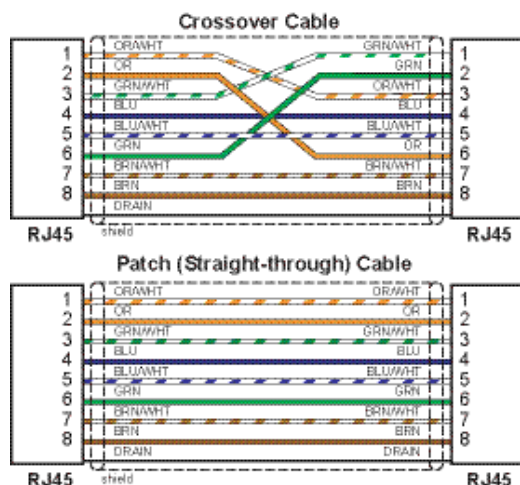

Ethernet Patch Cables

Cat 5e Straight Through Patch Cables				
Part Number	Color	Description	Length	Price
<u>C5E-STPBK-S3</u>	Black	AutomationDirect Cat5e Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Exceeds Category 5e cable specifications.	3' [0.91 m]	\$6.75
<u>C5E-STPBL-S3</u>	Blue			\$6.75
<u>C5E-STPGN-S3</u>	Green			\$6.75
<u>C5E-STPGY-S3</u>	Gray			\$6.75
<u>C5E-STPOR-S3</u>	Orange			\$6.75
<u>C5E-STPPL-S3</u>	Purple			\$6.75
<u>C5E-STPRD-S3</u>	Red			\$6.75
<u>C5E-STPYL-S3</u>	Yellow			\$6.75
<u>C5E-STPBK-S7</u>	Black	AutomationDirect Cat5e Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Exceeds Category 5e cable specifications.	7' [2.13 m]	\$11.00
<u>C5E-STPBL-S7</u>	Blue			\$11.00
<u>C5E-STPGN-S7</u>	Green			\$11.00
<u>C5E-STPGY-S7</u>	Gray			\$11.00
<u>C5E-STPOR-S7</u>	Orange			\$11.00
<u>C5E-STPPL-S7</u>	Purple			\$11.00
<u>C5E-STPRD-S7</u>	Red			\$11.00
<u>C5E-STPYL-S7</u>	Yellow			\$11.00
<u>C5E-STPBK-S10</u>	Black	AutomationDirect Cat5e Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Exceeds Category 5e cable specifications.	10' [3.05 m]	\$14.50
<u>C5E-STPBL-S10</u>	Blue			\$14.50
<u>C5E-STPGN-S10</u>	Green			\$14.50
<u>C5E-STPGY-S10</u>	Gray			\$14.50
<u>C5E-STPOR-S10</u>	Orange			\$14.50
<u>C5E-STPPL-S10</u>	Purple			\$14.50
<u>C5E-STPRD-S10</u>	Red			\$14.50
<u>C5E-STPYL-S10</u>	Yellow			\$14.50
<u>C5E-STPBK-S14</u>	Black	AutomationDirect Cat5e Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Exceeds Category 5e cable specifications.	14' [4.3 m]	\$17.00
<u>C5E-STPBL-S14</u>	Blue			\$16.50
<u>C5E-STPGN-S14</u>	Green			\$14.00
<u>C5E-STPGY-S14</u>	Gray			\$17.00
<u>C5E-STPRD-S14</u>	Red			\$14.50
<u>C5E-STPYL-S14</u>	Yellow			\$14.50
<u>C5E-STPBK-S25</u>	Black	AutomationDirect Cat5e Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Exceeds Category 5e cable specifications.	25' [7.6 m]	\$24.00
<u>C5E-STPBL-S25</u>	Blue			\$23.00
<u>C5E-STPGN-S25</u>	Green			\$20.00
<u>C5E-STPGY-S25</u>	Gray			\$23.00
<u>C5E-STPOR-S25</u>	Orange			\$20.00
<u>C5E-STPRD-S25</u>	Red			\$20.00
<u>C5E-STPYL-S25</u>	Yellow			\$20.00
<u>C5E-STPBK-S50</u>	Black	AutomationDirect Cat5e Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Exceeds Category 5e cable specifications.	50' [15.2 m]	\$41.00
<u>C5E-STPBL-S50</u>	Blue			\$37.50
<u>C5E-STPGY-S50</u>	Gray			\$39.50
<u>C5E-STPOR-S50</u>	Orange			\$33.00
<u>C5E-STPPL-S50</u>	Purple			\$34.00
<u>C5E-STPRD-S50</u>	Red			\$33.00
<u>C5E-STPYL-S50</u>	Yellow			\$31.50


Ethernet Patch Cables

Cat5e Crossover Patch Cables

Part Number	Color	Description	Length	Price
<u>C5E-STPOR-C3</u>	Orange	AutomationDirect Cat5e Ethernet crossover patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000 Mbps networks. Labeled as Crossover on both ends. Exceeds Category 5e cable specifications.	3' [0.91 m]	\$10.00
<u>C5E-STPYL-C3</u>	Yellow			\$8.25
<u>C5E-STPOR-C7</u>	Orange		7' [2.13 m]	\$12.50
<u>C5E-STPYL-C7</u>	Yellow			\$11.00
<u>C5E-STPOR-C10</u>	Orange		10' [3.05 m]	\$16.00
<u>C5E-STPYL-C10</u>	Yellow			\$13.50
<u>C5E-STPOR-C14</u>	Orange		14' [4.3 m]	\$20.50
<u>C5E-STPOR-C25</u>	Orange		25' [7.6 m]	\$26.50
<u>C5E-STPYL-C25</u>	Yellow			\$22.50
<u>C5E-STPOR-C50</u>	Orange		50' [15.2 m]	\$41.00
<u>C5E-STPYL-C50</u>	Yellow			\$36.00

Cat5e Cable Specifications

Transfer Parameters	Cat5e
Transfer Rate	Up to 1 Gbit/s full duplex
Temperature Range	Bare cable temperature rating is 75°C
Protection Degree	RJ45 connector: IP20
Outer Diameter	6.0 mm ±0.2 mm
Bend Radius	60mm (10 x outer diameter)
Connection	Shielded RJ45 plug
Wire Material	Stranded copper
Approvals	Bare cable is cULus Recognized (file number E132276)

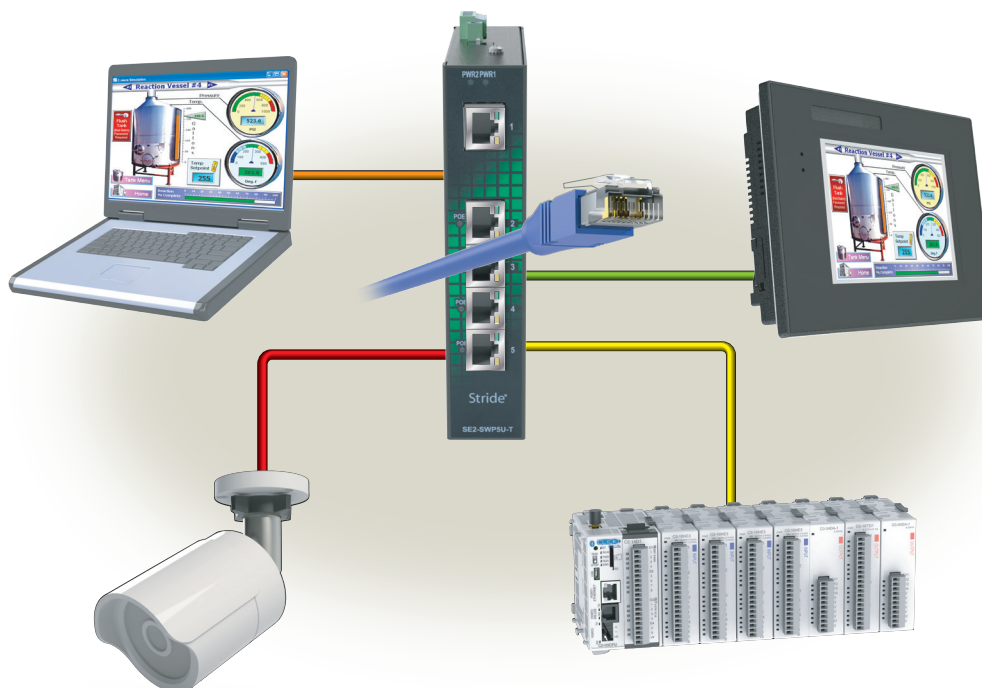

Ethernet Patch Cables

Cat6a STP Ethernet Patch Cables

Connectivity

Ethernet is a networking technology that includes the protocol, port, cable, and computer chip needed to interconnect intelligent devices on to a local area network.

Designed for High-Speed Industrial Use

The noise interference radiated from electrical components that is often associated with factory floor environments can result in partial or complete data loss. This may result in delays or complete communication loss in extremely noisy environments.

Our Cat6a Ethernet patch cables have a tighter twist rate than Cat5e cables to reduce crosstalk. The Cat6a cables are further designed to reduce the effects of (EMI) electromagnetic interference by incorporating a foil shield around each twisted pair, plus a single metal foil shield that wraps around the entire set of 8 wires. The RJ45 connectors are also shielded against electrical interference and designed to be robust.


The cables comply with the PoE+ standard to deliver an enhanced 30W of power.

With several lengths to choose from at great pricing, these cables should help you in creating solid, reliable Ethernet networks with any application.



Features

- Up to 10Gbps transfer rate
- 30W Power over Ethernet (PoE+)
- Connector: 50-micron gold plated RJ45 male plugs
- Conductor: 4-pair 26 AWG stranded copper
- Foil shielded twisted pairs with overall foil shielded cable for industrial applications
- CM rated, suitable for general use other than plenum spaces
- RoHS compliant

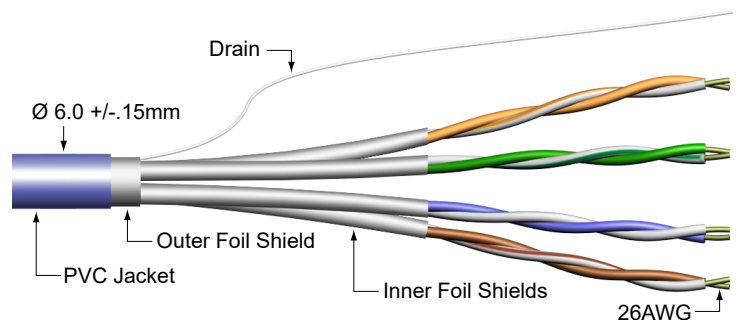



Cat6a Straight Through Patch Cables

Part Number	Color	Description	Length	Price
C6A-STPBL-S3	Blue	AutomationDirect Cat6a Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male. For use with 10/100/1000/10000 Mbps networks.	3' [0.91 m]	\$9.00
C6A-STPBL-S7			7' [2.13 m]	\$13.50
C6A-STPBL-S10			10' [3.05 m]	\$17.00
C6A-STPBL-S14			14' [4.3 m]	\$21.50

Cat6a Cable Specifications

Transfer Parameters	Cat6a
Transfer Rate	Up to 10 Gbit/s full duplex
Temperature Range	Bare cable temperature rating is 75°C
Protection Degree	RJ45 connector: IP20
Outer Diameter	6.0 mm ±0.2 mm
Bend Radius	60mm (10 x outer diameter)
Connection	Shielded RJ45 plug
Wire Material	Stranded copper
Approvals	Bare cable is cULus Recognized (file number E515747)

Patch (Straight-through) Cable

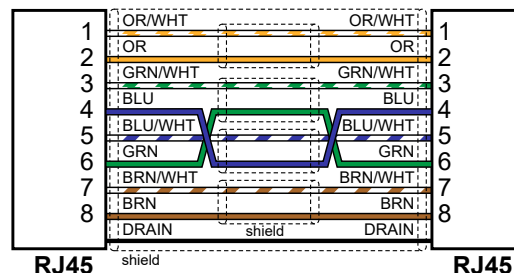


AchieVe™ Fiber Optic Patch Cables

Features

- Metal-free indoor cable
- Completely dry design
- High flexibility and light weight
- Halogen-free and non-corrosive combustion gases
- Low fire load for high safety requirements
- Jacket material complies with UL 94V-0


RoHS

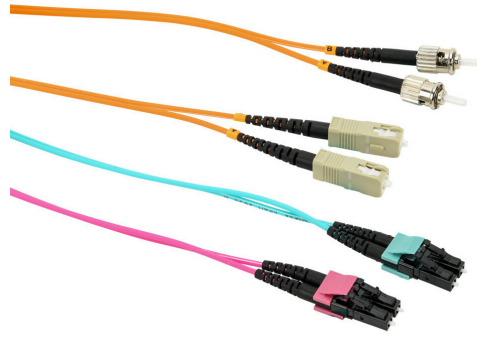RoHS Compliant


Fiber Optic Patch Cables

Part Number	Description	Color	Connectors	Length	Price
FOM-OM1-LCLC-001	AchieVe OM1 multi-mode fiber optic Ethernet patch cable	Orange	LC duplex to LC duplex	3.2' [1m]	\$7.25
FOM-OM1-LCLC-003				9.8' [3m]	\$8.00
FOM-OM1-LCLC-005				16.4' [5m]	\$9.50
FOM-OM1-LCLC-010				32.8' [10m]	\$15.00
FOM-OM1-LCST-001			LC duplex to ST duplex	3.2' [1m]	\$7.50
FOM-OM1-LCST-003				9.8' [3m]	\$8.25
FOM-OM1-LCST-005				16.4' [5m]	\$9.00
FOM-OM1-LCST-010				32.8' [10m]	\$15.00
FOM-OM1-SCLC-001			SC duplex to LC duplex	3.2' [1m]	\$7.25
FOM-OM1-SCLC-003				9.8' [3m]	\$8.00
FOM-OM1-SCLC-005				16.4' [5m]	\$9.50
FOM-OM1-SCLC-010				32.8' [10m]	\$15.00
FOM-OM1-SCSC-001			SC duplex to SC duplex	3.2' [1m]	\$7.25
FOM-OM1-SCSC-003				9.8' [3m]	\$8.00
FOM-OM1-STST-001			ST duplex to ST duplex	3.2' [1m]	\$9.25
FOM-OM1-STST-003				9.8' [3m]	\$12.50
FOM-OM2-SCLC-001	AchieVe OM2 multi-mode fiber optic Ethernet patch cable		SC duplex to LC duplex	3.2' [1m]	\$7.25
FOM-OM2-SCLC-003				9.8' [3m]	\$8.00
FOM-OM2-SCLC-005				16.4' [5m]	\$9.25
FOM-OM2-SCLC-010				32.8' [10m]	\$12.50
FOM-OM3-LCLC-001	AchieVe OM3 multi-mode fiber optic Ethernet patch cable	Aqua	LC duplex to LC duplex	3.2' [1m]	\$8.00
FOM-OM3-LCLC-003				9.8' [3m]	\$9.25
FOM-OM3-LCLC-005				16.4' [5m]	\$10.00
FOM-OM3-LCLC-010				32.8' [10m]	\$15.00
FOM-OM4-LCLC-001	AchieVe OM4 multi-mode fiber optic Ethernet patch cable	Violet	LC duplex to LC duplex	3.2' [1m]	\$9.75
FOM-OM4-LCLC-003				9.8' [3m]	\$15.00
FOM-OM4-LCLC-005				16.4' [5m]	\$18.00
FOM-OM4-LCLC-010				32.8' [10m]	\$21.00

Achieve™ Fiber Optic Patch Cables

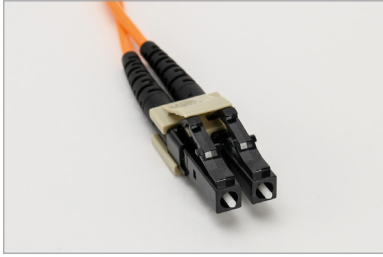

LC Connector



ST Connector




SC Connector

Optical Characteristics and Physical Properties

Fiber Type		OM1	OM2	OM3	OM4
Jacket Color		Orange	Orange	Aqua	Violet
Core Diameter (μm)		62.5 ±2.5	50 ±2.5		
Cladding Diameter (μm)		125 ±5.0			
Primary Coating Diameter (μm)		245 ±10			
Attenuation (max. in cable) (dB/km)	@850nm	≤ 3.4	≤ 3.0		
	@1300nm	≤ 1.0			
Bandwidth (overfilled) (MHz*km)	@850nm	200	500	1500	3500
	@1300nm	500			
Serial Ethernet 1 Gigabit (meters)	@850nm	–	–	1000	1040
	@1300nm	–	–	600	600
Serial Ethernet 10 Gigabit (meters)	@850nm	–	–	300	550
	@1300nm	–	–	300	300

Cable Construction

1	Fiber	250μm multimode
2	Semi-tight Buffer Tube	900μm LSZH
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH



Cable Mechanical and Environmental Properties

Type	2 cores duplex fiber optic cable	
Cable Outer Diameter	2.0 x 4.1 mm	
Jacket Material	low smoke zero halogen (LSZH), UL94 V-0 compliant	
Minimum Bending Radius	During Installation	50mm (IEC 60794-1-2 E11)
	In Service	25mm (IEC 60794-1-2 E11)
Crush Resistance	Short Term	4000 N/dm (IEC 60794-1-2 E3)
	Long Term	1000 N/dm (IEC 60794-1-2 E3)
Impact Resistance	Wp=0.74J	40 impact (IEC 60794-1-2 E4)
	Wp=1J	20 impact (IEC 60794-1-2 E4)
Repeated Bending	r=25mm w=0.5 kg	5000 cycles (IEC 60794-1-2 E6)
Length Tolerance	±50mm	
Max. Tensile Strength	300N	
Temperature Range	In Service	–13°F to +158°F [–25°C to +70°C]
	In Storage	–40°F to +158°F [–40°C to +70°C]
Fire Load	0.22 MJ/m	

Connector Specifications

LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
ST Connector Compliance	IEC 61754-2, TIA 604-2, RoHS
Alignment Technology	Full ceramic ferrule (Zirconia ZrO ₂)
Operating Temperature	–40°F to +185°F [–40°C to +85°C]
Flammability	UL94 V-0 compliant
Durability	<0.1 dB typical change for >500 matings

Optical Performance

Insertion Loss (Multi-mode)	≤ 0.30 dB Max., 0.15 dB Typ. IEC 61300-3-4 Method B
Return Loss (Multi-mode)	≥35dB IEC 61300-3-6 Method B

End-face Control Parameters

Geometry Inspection	IEC 61755-3-1
Visual Inspection	IEC 61300-3-35

StrideLinx Remote Access Solution

SE-SL Series Industrial VPN Routers



RoHS Compliant



verizon
Model SE-SL3011-4GG Only

AT&T and T-Mobile compatible with LTE router

StrideLinx Industrial VPN Router Models

Part Number	Price	Gigabit Ethernet	WiFi	4G LTE (2)
<u>SE-SL3001</u> (1)	\$400.00	✓		
<u>SE-SL3011</u>	\$494.00	✓		
<u>SE-SL3011-WF</u>	\$621.00	✓	✓	
<u>SE-SL3011-4GG</u>	\$727.00	✓		✓ (Global)

(1) SE-SL3001 does not support data logging or notifications.

(2) SIM card and data plan compatible with the frequencies and bands supported by the device and identified in the spec table are required for 4G LTE operation from the carrier. An M2M SIM card is configured with an amount of data and a duration of validity at the time of purchase.

Antennas required for WiFi and 4G models and must remain connected during operation.

WARNING: DO NOT insert or remove the SIM card when power is applied to the router.

Key features


- Gigabit port speed
- Wired, WiFi, or 4G LTE WAN connectivity
- Easy, secure VPN networking
- Available Notification and Data Logging service
- Available Service Level Agreement (SLA)

4G LTE Router Options

Features	SE-SL3011-4GG
Verizon*	Yes – Certified
AT&T	Yes – Tested
T-Mobile	Yes – Tested
International Frequency Bands	Yes, but not tested with carriers

* Requires router firmware version 3.20 or later.

The StrideLinx Platform is a secure and powerful VPN platform based on a worldwide network of servers. It is focused on delivering and enhancing innovative remote service. A typical StrideLinx setup is illustrated as follows.

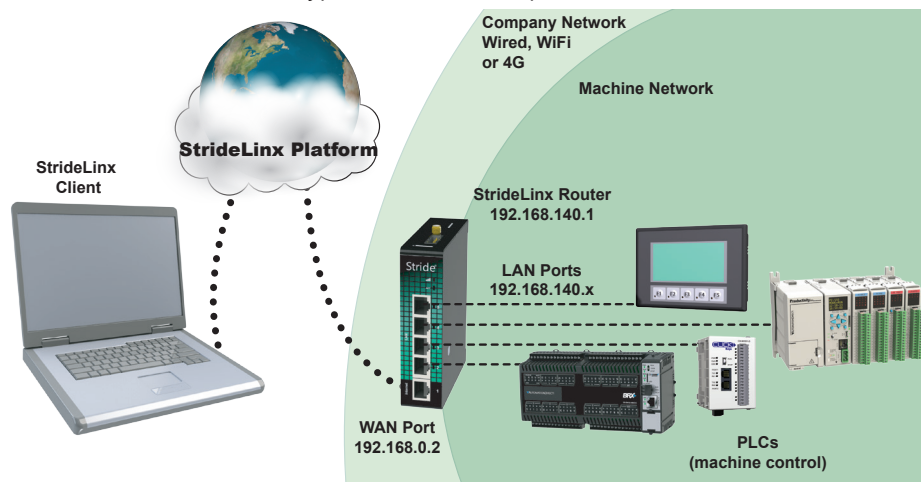

Please visit the [StrideLinx](#) page at AutomationDirect.com for an overview of the StrideLinx Remote Access Solution.



Remote Access Solution

SE-SL Series Industrial VPN Routers

Power Details	
Input Voltage	Class 2 LPS Power Supply, 12-24 VDC
Maximum Input Power	10W
Maximum Input Current	2A
Internal Voltage Protection	29V max
Reverse Polarity Protection	Yes
Isolation	1.5 kV

General Specifications	
USB	USB 2.0 (for configuration only)
Processor	MIPS 800MHz
Digital Input for Local Control	Yes
Operating Temperature Range	-20 to +65°C [-4 to +149°F]
Storage Temperature Range	-20 to +65°C [-4 to +149°F]
Relative Humidity	10 to 95% non-condensing
Operating Altitude	Up to maximum 2000m
Storage Altitude	Up to maximum 3000m
Environmental Air	For use in Pollution Degree 2 Environment. No corrosive gases permitted.
EMI	FCC CFR47 Part 15, EN55022/CISPR22, Class B
EMS	IEC61000-4-2 (ESD): ± 8kV (contact), ± 15kV (air) IEC61000-4-3 (RS): 10V/m (80MHz ~ 2GHz) IEC61000-4-4 (EFT): Power Port ± 4kV; Data Port: ± 2kV IEC61000-4-5 (Surge): Power Port: ± 2kV/DM, ± 4kV/CM; Data Port ± 2kV IEC61000-4-6 (CS): 10V (150kHz ~ 80MHz)
RoHS and WEEE	RoHS (Pb free) and WEEE compliant
Packaging and Protection	Metal case, IP20
Mounting	DIN rail
Weight	270~310 gram
Certification	CE, cULus, RoHS, REACH, AT&T (SE-SL3011-4G), FCC
Warranty	2 years
Agency Approvals	UL/cUL 60950-1, CE

WiFi Specifications (P/N SE-SL3011-WF Only)	
WiFi IEEE 802.11 Version	b/g/n
WiFi Modes	Station (Client) Mode and Access Point
Speed	72 Mbps
Antenna Connection	RP-SMA plug (male)
Antenna Connector Torque	3~5 lb-in [0.3~0.6 N·m]
FCC ID	XPYLILYW1

Ethernet Interface	
Ethernet ports	Five GbE (4x LAN, 1x WAN)
Port Type	Shielded RJ45
Auto-Crossover	Yes, allows you to use straight-through or crossover wired cables
Auto-Sensing Operation	Yes, full and half duplex
Auto-Negotiating Speed	Yes
Flow Control	Automatic
Operating Mode	Store and forward wire speed switching, non-blocking
Devices Supported	All IEEE 802.3 compliant devices are supported
Protection	Built-in 1.5 kV magnetic isolation
Cable Requirements	Twisted pair (Cat5e or better) (shielded recommended)
Max. Cable Distance	100 meters

4G LTE Specifications (P/N SE-SL3011-4G Only)	
Protocols and Frequencies (AT&T)	LTE-FDD - B2, B4, B12 WCDMA - B2, B4, B5
Speed	LTE-FDD - Max. 100 Mbps (DL)/Max. 50 Mbps (UL) WCDMA - Max. 384 kbps (DL)/Max. 384 kbps (UL)
Antenna Connection	Two (2) SMA plugs (male)
Antenna Connector Torque	3~5 lb-in [0.3~0.6 N·m]
SIM size	Standard SIM (2FF)
FCC ID	XMR201605EC25A


4G LTE Specifications (P/N SE-SL3011-4GG Only)	
Protocols and Frequencies (Global)	LTE FDD: B1,B2,B3,B4,B5,B7,B8,B12,B13,B18,B19, B20,B25,B26,B28 LTE TDD: B38,B39,B40,B41 WCDMA: B1,B2,B4,B5,B6,B8,B19 GSM: B2,B3,B5,B8 GPRS: B2,B3,B5,B8
Speed	LTE-FDD: Max. 150 Mbps (DL)/Max. 50 Mbps (UL) LTE-TDD: Max. 130 Mbps (DL)/Max. 30 Mbps (UL) WCDMA: Max. 384 kbps (DL)/Max. 384 kbps (UL) GSM (EDGE): Max. 296 kbps (DL)/Max. 236.8 kbps (UL) GPRS: Max 107 kbps (DL)/Max. 85.6 kbps (UL)
Antenna Connection	Two (2) SMA plugs (male)
Antenna Connector Torque	3~5 lb-in [0.3~0.6 N·m]
SIM size	Standard SIM (2FF)
FCC ID	XMR201903EG25G

StrideLinx Remote Access Solution

SE-SL Series Industrial VPN Routers

Dimensions

mm [inches]

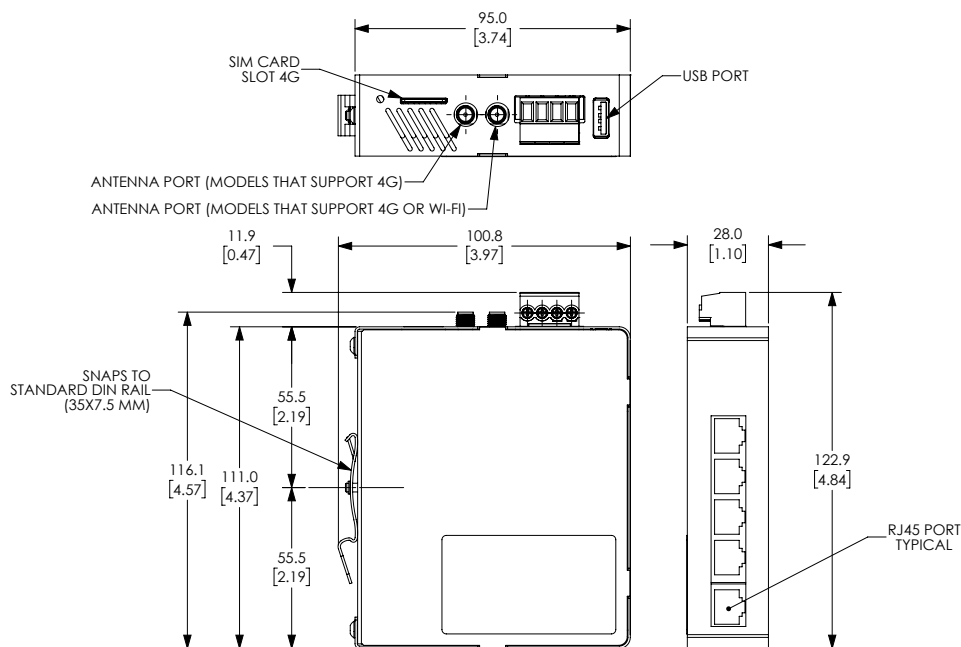

See our website: www.AutomationDirect.com for complete engineering drawings.


StrideLinx Remote Access Solution

Cellular Antennas for [SE-SL3011-4GG](#) Routers




[SE-ANT110](#) \$13.25

STRIDE whip/tilt LTE antenna, connector mount.

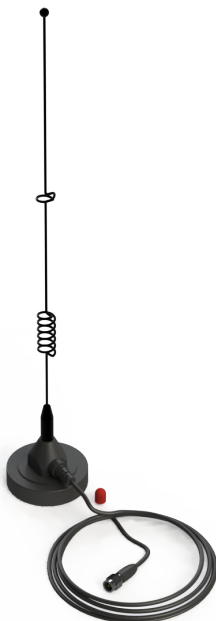

[SE-ANT130](#) \$32.00

STRIDE whip/straight LTE antenna, magnetic base mount, 9.8ft/3m cable length.

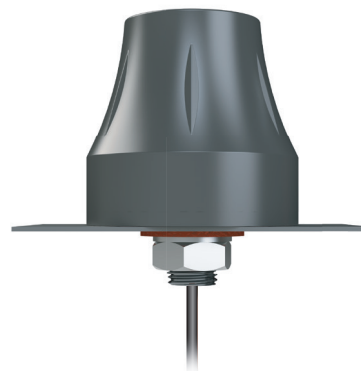

[SE-ANT150](#) \$40.00

STRIDE dome LTE antenna, IP67, panel mount, 9.8ft/3m cable length.

4G LTE Antenna Specifications			
	<i>SE-ANT110</i>	<i>SE-ANT130*</i>	<i>SE-ANT150</i>
Price	\$13.25	\$32.00	\$40.00
Fits	SE-SL3011-4GG		
Antenna Connector	SMA (M)		
Application	LTE, CDMA, GSM, HSPA, UMTS, GPRS		
Impedance	50Ω		
Antenna Type	whip, tilt	whip, straight	dome
Cable Length	N/A	3m [9.8 ft]	3m [9.8 ft]
Frequency Range	700–960MHz / 1.71–3.8 GHz	700–960MHz / 1.71–3.5 GHz	700–960MHz / 1.71–2.7 GHz
Gain	-3.0 dBi / 0.9 dBi	-2.5dBi / 0.1dBi	1.2 dBi / 3.2 dBi
Height	2.84 in	13 in	1.89 in
IP Rating	–	–	IP67
Maximum Power	10W	50W	5W
Mounting Screw Torque	NA	NA	2.94 N·m

* Gains listed are based on the antenna being mounted on a suitable ground plane.




Remote Access Solution

Cellular Antennas for SE-SL3011-4G and SE-SL3011-4GG Routers


Dimensions

mm [inches]


SE-ANT110:

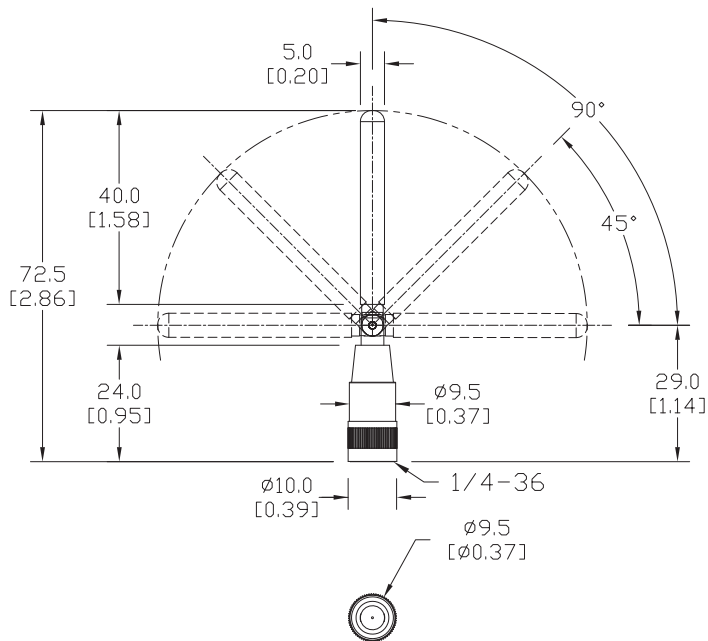

SE-ANT130:

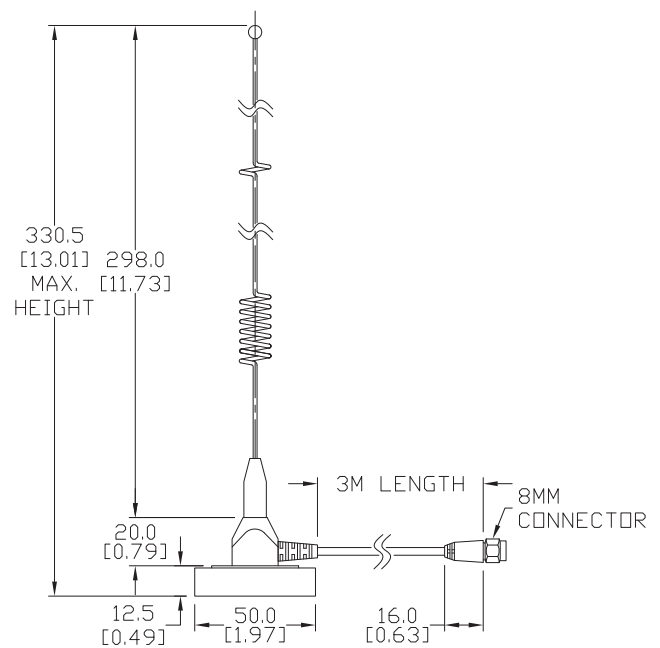

SE-ANT150:

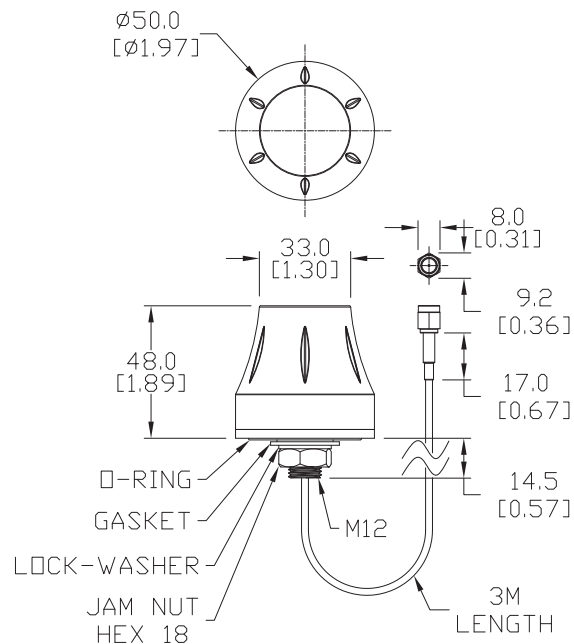

See our website: www.AutomationDirect.com for complete engineering drawings.


StrideLinx Remote Access Solution

2.4GHz WiFi Antennas for SE-SL3011-WF Routers (1 antenna required)



SE-ANT210 \$10.50

STRIDE whip/straight 2.4 GHz WiFi antenna, IP65, connector mount.

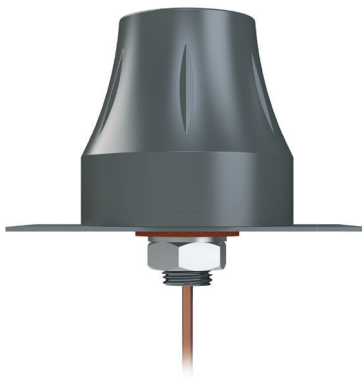

SE-ANT250 \$37.00

STRIDE dome 2.4 GHz WiFi antenna, IP67, panel mount, 9.8ft/3m cable length.

802.11 b/g/n 2.4 GHz WiFi Antenna Specifications

	<u>SE-ANT210</u>	<u>SE-ANT250</u>
Price	\$10.50	\$37.00
Fits	SE-SL3011-WF	
Antenna Connector	RP-SMA (M)	
Application	802.11 b/g/n	
Impedance	50Ω	
Antenna Type	whip, straight	dome
Cable Length	N/A	3m [9.8 ft]
Frequency Range	2.4–2.5 GHz	2.4–2.5 GHz
Gain	1.8 dBi	1.5 dBi
Height	1.2 in	1.89 in
IP Rating	IP65	IP67
Maximum Power	1W	5W
Mounting Screw Torque	NA	2.94 N·m



StrideLinx Remote Access Solution

2.4GHz WiFi Antennas for SE-SL3011-WF Routers


Dimensions

mm [inches]

SE-ANT210:

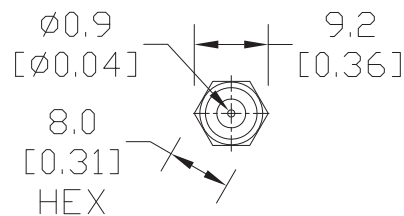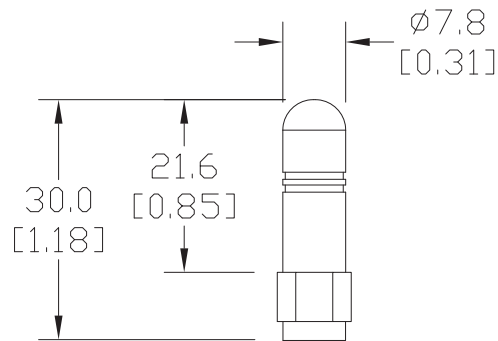

SE-ANT250:

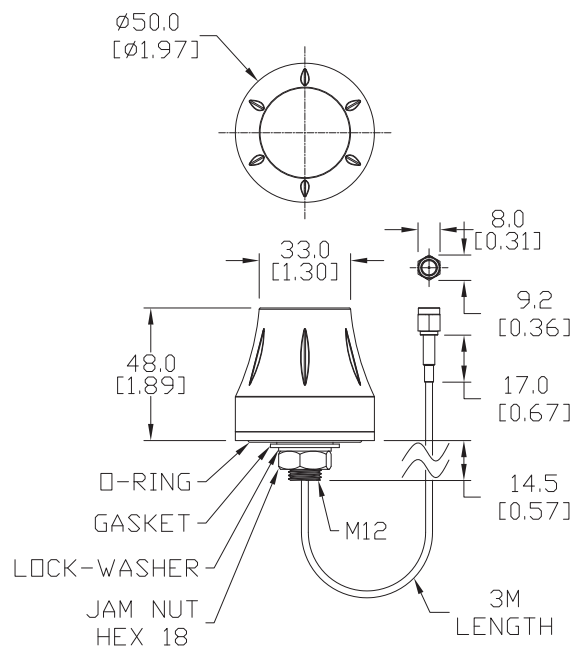

See our website: www.AutomationDirect.com for complete engineering drawings.


StrideLinX Remote Access Solution

Add-on Services – Add value to Remote Access

These licenses provide added services to your StrideLinX remote access. These are not needed for the basic function of the VPN remote access, but can be added to enhance the value of the platform to you and your customers.

Cloud Reporting licenses also include:

- unlimited cloud storage for up to 7 years with active license
- unlimited real time and user configurable dashboards
- unlimited data reports, and unlimited data tags per device



To see StrideLinX Cloud in action, please scan the QR code or visit <https://go2adc.com/vpn-cloud> and click the StrideLinX demo site link to sign up for an interactive product tour.

StrideLinX Cloud Logging and Reporting Licenses						
Part #	Price	Description	Term	Data Logging Points/Hour	Data Retention	Features
<u>SE-SLR010-1</u>	\$279.00	StrideLinX Basic Reporting and Logging License	1 year	1,000	6 months	License includes email notification, data logging enabled at 1,000 data samples per hour with schedule reporting. For use with (1) StrideLinX router. Includes StrideLinX Notify License (<u>#SE-SL021-1</u>).
<u>SE-SLR011-1</u>	\$499.00	StrideLinX Professional Reporting and Logging License	1 year	10,000	7 years	License includes email notification, data logging enabled at 10,000 data samples per hour with schedule reporting. For use with (1) StrideLinX router. Includes StrideLinX Notify License (<u>#SE-SL021-1</u>).



WARNING: DATA COLLECTED THROUGH CLOUD REPORTING WILL BE LOST IF YOUR LICENSE LAPSES. DATA FOR A SPECIFIC DEVICE WILL BE LOST IF A LICENSE IS REMOVED FROM THAT DEVICE. DATA IS ONLY STORED FOR THE DATA RETENTION DURATION OF YOUR LICENSE. IF DATA OLDER THAN THAT DURATION IS IMPORTANT, PLEASE ARCHIVE YOUR DATA LOCALLY BEFORE THE RETENTION LIMIT IS REACHED.

StrideLinX Add-on Licenses				
Part #	Price	Description	Term	Features
<u>SE-SL021-1</u>	\$131.00	StrideLinX Notify License	1 year	License includes alarm, trigger, recipient, and priority management with push and email notifications. For use with (1) StrideLinX router.
<u>SE-SLR001-1</u>	\$949.00	StrideLinX Professional License	1 year	License includes white label StrideLinX platform, unlimited VPN data traffic and advanced user and device access management. For use with (1) StrideLinX company.
<u>SE-SL051</u>	\$936.00	StrideLinX Mobile App Sustained Service License	1 year	License includes sustained service of white label StrideLinX iOS/Android mobile app with branding. For use with (1) existing white label StrideLinX iOS/Android mobile app. ONLY AVAILABLE FOR EXISTING CUSTOM MOBILE APP USERS.

Stride Modbus Gateway



- Industrial 4 serial port, 2 Ethernet port Modbus Gateways (Modbus RTU/ASCII <-> Modbus TCP)
- Automatic read function "Agent Mode"
- Ethernet ports each support up to 16 TCP devices, client or server
- Serial ports each support up to 128 slave devices or 1 master device
- DIP switch selectable termination resistor for RS-485 mode
- High Serial Isolation Voltage - 2kV
- UL61010 with Class 1 Div 2 HazLoc
- Metal housing with wide temperature rating (-40 to +75 deg C)

Stride Modbus Gateway Models

Part Number	Price	RJ45 10/100	Serial D-sub 9-pin	Input Power (Max.)
SGW-MB1524-T	\$433.00	2	4	3.2 W

Ethernet Interface

Port Type	Shielded RJ45
Speed	10/100 Mbps
Protection	Built-in 1.5 kV magnetic isolation
Protocol Supported	Modbus TCP/IP Client and Server
Modbus TCP Devices Supported	16 simultaneous Modbus TCP connections per Ethernet port
Cable Type	Autodetects Ethernet cable types (MDI/MDIX)
Default IP address	192.168.0.249; 192.168.1.249 (2 port model)

Serial Interface

Port	D-sub 9-pin male port
Interface Mode	RS-232, RS-485 and RS-422
Supported Baud Rates	300bps – 460.8 kbps
Parity	Odd, Even or None
Data Bits	7 or 8 bits
Stop Bits	1 or 2
Flow Control	RTS or None
Termination	DIP-Switch to Enable/Disable 120Ω matching resistor for RS-485
ESD Protection	15kV for all signals
Isolation Protection	2kV
Serial Devices Supported	128 slaves or 1 master per port
Protocols Supported	Modbus RTU, Modbus ASCII

Reset to Factory Defaults:

Press recessed Hardware Reset button on top of gateway housing and hold for 5 seconds to reset all settings to factory default.



NOTE: For additional product details, a user manual, [SGW-USER-M](#), is available as a downloadable PDF file from the Online Documentation area of the AutomationDirect website.

Power Details

Power Consumption	See Input Power in <i>STRIDE</i> Modbus Gateway Models table
Power Input	Redundant input terminals
Input Voltage	12 / 24 / 48 VDC
Appliance Class	Class III, SELV power source
Reverse Power Protection	Yes
Overload Protection	Yes


Environmental

Operating Temperature Range	-40 to +75 °C [-40 to +167 °F]
Storage Temperature Range	-40 to +85 °C [-40 to +185 °F]
Humidity	5 to 95% RH (non-condensing)
Maximum Altitude	2000m
Environmental Air	For use in Pollution Degree 2 Environment
Protection Level	Metal case, IP40
Agency Approvals	UL61010-1, UL61010-2-201, Class I Div 2 12.12.01-2015; CSA C22.2 No. 213-16; CAN/CSA No. 61010-1-12; CAN/CSA C22.2 No. 61010-2-201:14, CE, FCC
EMI	EN 55032 Class A FCC Part 15 Subpart B Class A
EMS	IEC61000-4-2(ESD): ±6kV(contact), ±8kV(air) IEC 61000-4-3(RS): 10V/m (80MHz–2GHz) IEC61000-4-4(EFT): Power Port: ±2kV; Data Port: ±1kV IEC61000-4-5(Surge): PowerPort: ±1kV/DM, ±2kV/CM; Data Port: ±1kV IEC 61000-4-6 (CS): 10V(150KHz-80MHz)
Mechanical Standards	IEC60068-2-6(Vibration) IEC60068-2-27(Shock) IEC60068-2-32(Free Fall)

LED Status Indicators

PWR1 (green)	LED ON indicates voltage applied to Power 1 terminals.
PWR2 (green)	LED ON indicates voltage applied to Power 2 terminals.
RUN (green)	LED ON indicates the gateway is booting. LED FLASHING indicates the gateway is functioning normally.
RJ45 Ports	Speed (yellow) Link/Activity (green) LED ON indicates Ethernet speed is 100 Mbps. LED OFF indicates Ethernet speed is 10 Mbps LED ON indicates valid link is established. LED FLASHING indicates data traffic.
Serial Ports	T, transmit (green) R, receive (green) LED FLASHING indicates gateway is sending data through serial port. LED FLASHING indicates gateway is receiving data through serial port.

Dimensions:

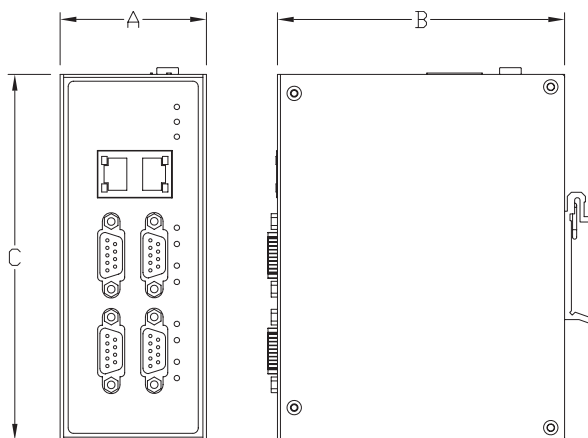

Safety Standards:



RoHS Compliant

Installation – DIN Rail Mounting:


These devices are open-type and are meant to be installed in an enclosure which is only accessible with the use of a tool and suitable for the environment when installed in Class 1, Division 2 Hazardous Locations. The gateway may be used indoors only. The gateway can be snapped onto a standard 35 mm x 7.5 mm height DIN rail (Standard: CENELEC EN50022) and can be mounted either vertically or horizontally. Allow 20mm (0.79") clearance between a STRIDE gateway and other equipment on the DIN rail.

DIN rail mounting steps:

1. Hook top back of unit over the DIN rail.
2. Push bottom back onto the DIN rail until it snaps into place.

DIN rail removal steps:

- A. Push the unit down to free the bottom of the DIN rail.
- B. Rotate the bottom of the unit away from the DIN rail.
- C. Unhook top of unit from DIN rail.

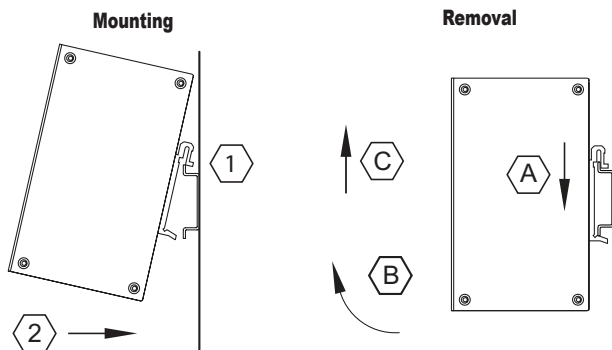

WARNING: THE FOLLOWING INFORMATION APPLIES WHEN OPERATING THIS DEVICE IN HAZARDOUS LOCATIONS:

SUITABLE FOR USE IN CLASS I, DIVISION 2, GROUPS A, B, C AND D HAZARDOUS LOCATIONS, OR NONHAZARDOUS LOCATIONS ONLY.

WARNING: EXPLOSION HAZARD

- DO NOT DISCONNECT EQUIPMENT WHILE THE CIRCUIT IS LIVE OR UNLESS THE AREA IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS.
- SUBSTITUTION OF ANY COMPONENT MAY IMPAIR SUITABILITY FOR CLASS I, DIVISION 2.

Dimensions


Part No.	Weight	Width (A)	Depth (B)	Height (C)
		mm [inches]		
SGW-MB1524-T	0.32 kg [0.71 lb]	54.0 [2.13]	106 [4.17]	135.0 [5.32]

Power Wiring:

The switch can be powered from the same DC source that is used to power your other devices. To maintain the UL listing, this must be an SELV power supply. A DC voltage in the range of 12 to 48 VDC needs to be applied between the P1+ terminal and the P1- terminal as shown below. The chassis screw terminal should be tied to panel or chassis ground. To reduce down time resulting from power loss, the switch can be powered redundantly with a second power supply as shown below. A recommended DC power supply is AutomationDirect.com part number [PSL-24-010](#).

Terminal block connector is Degson 2EDGK-5.08-04P-14-1000AH or equivalent.

Redundant DC Power




Optional Dual DC Supplies

Maximum terminal screw torque is 4.43 lb-in (0.5 N·m).

Ferrule required for stranded wire.
Wire Size Range: 26 – 12 AWG
Wire Strip Length: 7mm

Communication Ports Wiring:

8 pin RJ45




Ethernet Port

Pin	MDI-X Signal	MDI Signal
1	Receive Data + (RD+)	Transmit Data + (TD+)
2	Receive Data – (RD–)	Transmit Data – (TD–)
3	Transmit Data + (TD+)	Receive Data + (RD+)
6	Transmit Data – (TD–)	Receive Data – (RD–)
4, 5, 7, 8	Unused	Unused

Note: + and – indicate level polarities.

D-sub 9-pin port



Serial Port

Pin	RS-232	RS-422/485-4w	RS-485-2w
1	–	RXD – (B)	–
2	RXD	RXD + (A)	–
3	TXD	TXD – (Z)	Data – (B)
4	RTS	TXD + (Y)	Data + (A)
5	GND	GND	GND
6, 7, 8, 9	Unused	Unused	Unused



Pocket Portal IIoT Bridge



SE-PB100 \$93.50

Stride Pocket Portal IIoT Bridge

Features

- **Wireless Industrial IIoT end-to-end solution to log your data in the cloud**
- **Faster Monitoring:** Unmonitored assets can get connected and become monitored assets in minutes
- **Remote Control:** Write to Modbus coils, registers, or 3.3–24 VDC digital outputs using the mobile app
- **Reduce Costs:** Enterprises can implement IIoT capabilities without needing technical expertise and without modifying equipment
- **Retrofit Solution:** Industrial controls, commercial buildings, retail spaces, or factories can be entirely retrofitted with IIoT capabilities in days instead of months
- **Work Smarter:** Continuously monitor and optimize asset performance



* Requires Wi-Fi Internet connection

* iOS/Android device with Bluetooth needed for provisioning

Modbus Interface

Port Connector	4-pin pigtail connector (shared with power)
Interface Mode	RS-485
Serial Devices Supported	1 Modbus Slave
Protocols Supported	Modbus RTU Master

Local Digital and Analog I/O

Digital Input/Output	4 Connections configured as Input/Output (3.3–24 VDC)
Analog Input	2 Analog Inputs (0–10 VDC / 4–20 mA)

Wi-Fi Interface for Cloud Connectivity

IEEE Wi-Fi Standard	802.11 b/g/n
Speed	Up to 72.2 Mbps
Frequency Band	2.4 GHz
Antenna	Internal PCB Antenna

Power Details

Input Voltage	12–24 VDC
Max. Input Voltage Range	10–26VDC
Power Consumption	Max 10W
Reverse Power Protection	Yes
Overload Protection	No

LED Indicators

Wi-Fi LED	LED OFF: Wi-Fi not provisioned SLOW BLINK: Connecting to Wireless Access Point FAST BLINK: Connecting to Pocket Portal Cloud Service LED ON: Connected to Pocket Portal Cloud Service
Power LED	LED OFF – Power OFF LED ON – Power ON
BLE LED (Bluetooth Low Energy, used in initial setup only)	LED OFF – BLE off or not advertising SLOW BLINK – BLE advertising LED ON – Connected to mobile app

Environmental


Operating Temperature Range	-20 to +70°C [-4 to 158°F]
Storage Temperature Range	-40 to +85°C [-40 to +185°F]
Humidity	5 to 85% RH (non-condensing)
Protection Level	plastic case, IP40
EMI	EN 55032 Class A FCC Part 15 Subpart C (15.247)
EMS	IEC61000-4-2 (ESD): ±4kV (contact), ±8kV (air discharge) IEC 61000-4-3 (RS): 10V/m (80MHz–6GHz) IEC 61000-4-6 (CS): 10V (150KHz–80MHz)
Mechanical Standards	IEC60068-2-64 (Random Vibration) IEC60068-2-32 (Drop Test / Free Fall)
Agency Approvals	CE, FCC



Pocket Portal IIoT Bridge

Dimensions

mm [inches]

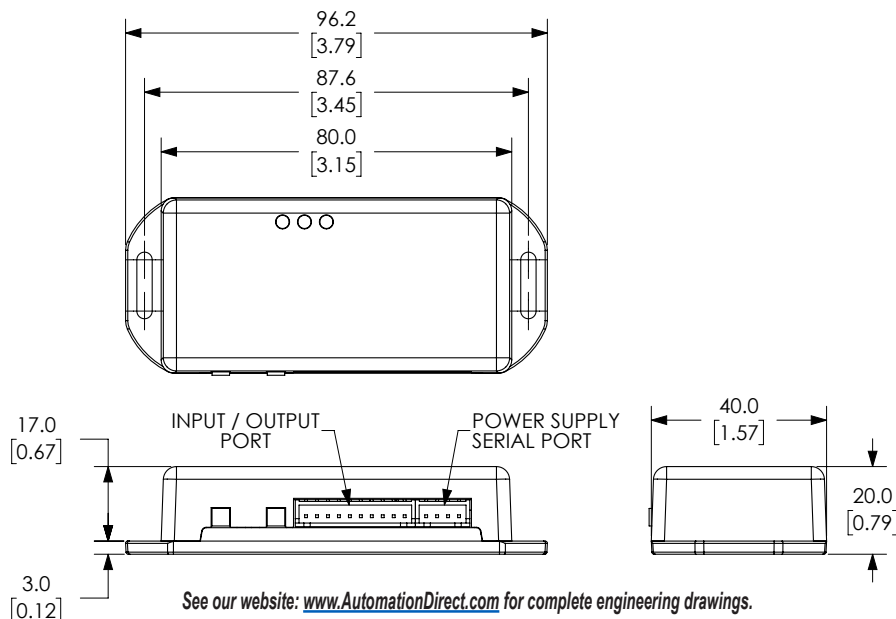

DIN Rail Mounting Brackets

The Pocket Portal IIoT Bridge can be directly mounted to a flat surface, with no restrictions on mounting orientation. An optional DIN-rail adapter will allow mounting on a standard 35mm x 7.5 mm DIN rail.

DIN Rail Mounting Brackets		
Part Number	Price	Description
DRA-2B	\$6.00	35mm DIN rail adapters, 1.70"x0.45"x0.83" [43.7x11.4x21.0 mm], 2pcs/pkg.



DRA-2B




NOTE: Installation in a metal cabinet is not recommended, as the cabinet may block the Wi-Fi signal.

Data Subscriptions

Each Pocket Portal IIoT Bridge requires a Pocket Portal monthly data subscription. Subscriptions are available at <https://www.pocketportal.com>.

Pocket Portal Platform Subscriptions		
	SE-PP5M	SE-PP500K
Price	\$15.50/mo.*	\$8.25/mo.*
Description	Data Logging and Notify Gold Subscription	Data Logging and Notify Silver Subscription
Subscription Duration	Monthly or Annual Up to 23% discounts available for annual subscriptions.	
Supports	(1) STRIDE Pocket Portal IIoT bridge	

* Available for purchase only on the Stride Pocket Portal platform at <https://www.pocketportal.com>. Details and limits for each subscription are available on the Pocket Portal platform.

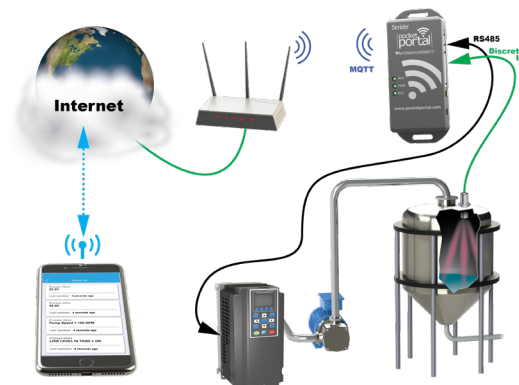

Stride MQTT Gateway



Features

- Convert Modbus RTU/TCP to MQTT
- IIoT MQTT protocol with SSL/TLS
- Configurable via web page
- Hardware watchdog function
- Full electrical isolation
- Add this to your MQTT cloud, compatible with AWS, Mosquitto and more
- Wired or Wi-Fi models available



Stride MQTT Gateway Models

Part Number	Ethernet	RS-485	WiFi	Price
<u>SGW-MQ1611</u>	✓	✓		\$275.00
<u>SGW-MQ1611-WF</u>	✓	✓	✓	\$279.00

Ethernet Specifications

Connector	RJ-45
Ethernet Port Speed	10/100Mbps auto-detected
Protocol	MQTT, Modbus TCP
Simultaneous Ethernet Connections	8

RS-485 Specifications

Connector	Removable screw terminals, 5.08 mm pitch
Baud rate	Up to 115.2 kbps
Parity	Even, odd or none
Stop bit	1 or 2
Number of Serial Devices	32 max.
Switching Time TX/RX (RS-485)	150µs
Termination Resistance	120Ω

WiFi Specifications (Model SGW-MQ1611-WF Only)

WiFi Standards	802.11 a/b/g/n/ac
Frequency Bands	2.4/5.5 GHz
Antenna	Internal

Network Ports

Web User Interface	80
Modbus	502 (default, software configurable)
MQTT	Software configurable, determined by MQTT Broker



RoHS



RoHS Compliant

Stride[®] MQTT Gateway

Electrical Specifications

Power Supply Connector	Removable screw terminals, 5.08 mm pitch
Input Voltage Range	10–30 VDC
Current Consumption	max 300mA @ 24VDC
Isolation	
Power Supply / RS-485	1500VAC, 50Hz, 1 min.
Ethernet / RS-485	1000VAC, 50Hz, 1 min.
Ethernet / Power Supply	1500VAC, 50Hz, 1 min.
Reverse Polarity Protection	Yes

Mechanical Specifications

Material	Self-extinguishing plastic
Mounting	35mm DIN rail (EN50022 and EN50035)
Weight	Approximately 200g

Environmental Specifications


Operating Temperature	0 to +60°C [32 to 140°F]
Storage Temperature	-20 to +70°C [-4 to +158°F]
Humidity	0–90%, noncondensing
Maximum Altitude	2000m
IP Rating	IP20
Installation	Indoor
Category of Installation	II
Pollution Degree	2
EMC	
Immunity	EN61000-6-2
Emission	EN61000-6-4
Agency Approvals	CE, FCC, RoHS



NOTE: Installation of the Wi-Fi model in a metal cabinet is not recommended, as the cabinet may block the Wi-Fi signal.

Dimensions

mm [inches]

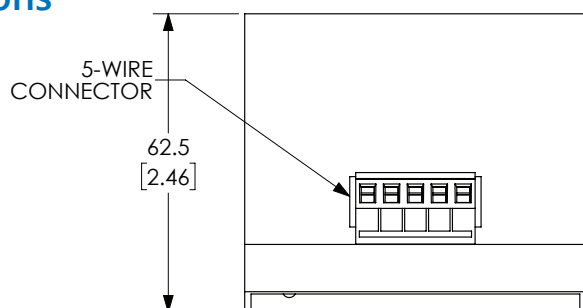

See our website: www.AutomationDirect.com for complete engineering drawings.

