

SureStep™ STEPPING SYSTEMS

Stepping System Power Supplies STP-PWR-3204, 4805, 4810, 7005



Features

- Models available with 32V@4A, 48V@5A, 48V@10A, & 70V@5A DC unregulated step motor power
- 5VDC ±5% at 500 mA regulated logic power (electronic overload)
- Screw terminal AC input and DC output connectors
- 120 or 240 VAC, 50/60 Hz power input, switch selectable
- Power ON LEDs
- Integrated input and output fusing
- Matched to SureStep drives for maximum voltage

WARNING

To minimize the risk of potential safety problems, you should follow all applicable local and national codes that regulate the installation and operation of your equipment. These codes vary from area to area. It is your responsibility to determine which codes should be followed, and to verify that the equipment, installation, and operation are in compliance with the latest revision of these codes.

Equipment damage or serious injury to personnel can result from the failure to follow all applicable codes and standards. We do not guarantee the products described in this publication are suitable for your particular application, nor do we assume any responsibility for your product design, installation, or operation.

If you have any questions concerning the installation or operation of this equipment, or if you need additional information, please call our technical support group at 770-844-4200.

This publication is based on information that was available at the time it was printed. At **AutomationDirect.com**® we constantly strive to improve our products and services, so we reserve the right to make changes to the products and/or publications at any time without notice and without obligation. This publication may also discuss features that may not be available in certain revisions of the product.

SureStep™ Power Supply Specifications				
Part Number	STP-PWR-3204	STP-PWR-4805	STP-PWR-4810	STP-PWR-7005
Input Power fuse protected (1)	1-phase, 120/240 VAC, 50/60 Hz, 150 VA Fuse(1): 3A	1-phase, 120/240 VAC, 50/60 Hz, 350 VA Fuse(1): 5A	1-phase, 120/240 VAC, 50/60 Hz, 650 VA Fuse(1): 8A	1-phase, 120/240 VAC, 50/60 Hz, 500 VA Fuse(1): 7A
Input Voltage	120/240 VAC ±10% (switch selectable; voltage range switch is set to 240 VAC from factory)			
Inrush Current	120 VAC < 12A 240 VAC < 14A	120 VAC < 20A 240 VAC < 24A	120 VAC < 40A 240 VAC < 50A	
Motor Supply Output (linear unregulated, fuse protected (1), power on LED indicator)	32 VDC @ 4A (full load) 35 VDC @ 1A load 41 VDC @ no load Fuse(1): 6A	46.5 VDC @ 5A (full load) 52 VDC @ 1A load 57.5 VDC @ no load Fuse(1): 8A	46.5 VDC @ 10A (full load) 50 VDC @ 1A load 57.5 VDC @ no load Fuse(1): 15A	70 VDC @ 5A (full load) 79 VDC @ 1A load 86.5 VDC @ no load Fuse(1): 8A
SureStep Drive Compatibility (2)	STP-DRV-4035 (STP-DRV-4850) (STP-DRV-80100)	STP-DRV-4850 (STP-DRV-80100)		STP-DRV-80100
Logic Supply Output	5VDC ±5% @ 500 mA (regulated, electronically overload protected, power on LED indicator)			
Watt Loss	13W	25W	51W	42W
Storage Temperature	-55 to 85 °C -67 to 185 °F			
Operating Temperature	0 to 50 °C (32 to 122 °F) full rated; 70 °C (158 °F) maximum Derate current 1.1% per degree above 50 °C			
Humidity	95% (non-condensing) relative humidity maximum			
Cooling Method	Natural convection (mount power supply to metal surface if possible)			
Dimensions (in [mm])	4.00 x 7.00 x 3.25 [101.6 x 177.8 x 82.6]	5.00 x 8.10 x 3.88 [127.0 x 205.7 x 98.6]	5.62 x 9.00 x 4.62 [142.7 x 228.6 x 117.3]	
Mounting	Mount on either wide or narrow side with machine screws per dimension diagrams			
Weight (lb [kg])	6.5 [2.9]	11 [4.9]	18 [8.3]	16 [7.2]
Connections	Screw Terminals			
Agency Approvals	UL (file # E181899), CSA, CE			


- 1) Fuses to be replaced by qualified service personnel only. Use (1-1/4 x 1/4 in) ceramic fast-acting fuses (Edison type ABC from AutomationDirect, or equivalent).**
- 2) Caution: Do not use a power supply that exceeds the drive input voltage range. Using a lower voltage power supply with a higher voltage drive is acceptable, but will not provide full system performance.**

SureStep™ System Recommended Component Compatibility				
Drives (1)	Power Supplies (1)		Motors & Extension Cables (2,3)	
STP-DRV-4035	-	-		
STP-DRV-4850	-	STP-PWR-4805 STP-PWR-4810	STP-PWR-3204	STP-MTR-xxxxx & STP-EXT-020 STP-MTRH-xxxxx & STP-EXTH-020
STP-DRV-80100	STP-PWR-7005			

- 1) Caution: Do not use a power supply that exceeds the drive input voltage range. Using a lower voltage power supply with a higher voltage drive is acceptable, but will not provide full system performance.**
- 2) MTR motors have connectors compatible with the EXT extension cables.**
- 3) MTRH motors have connectors compatible with the EXTH extension cables.**


Power Supply Terminal & Component Layout

STP-PWR-3204

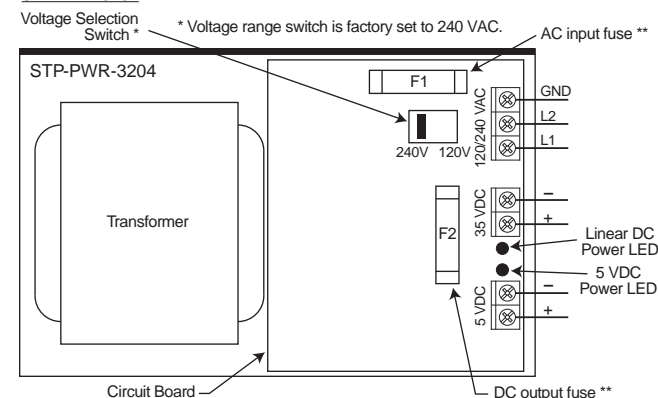

** Fuses are listed in power supply specifications table.
** Fuses to be replaced by qualified service personnel only.

STP-PWR-4805, -4810, 7005

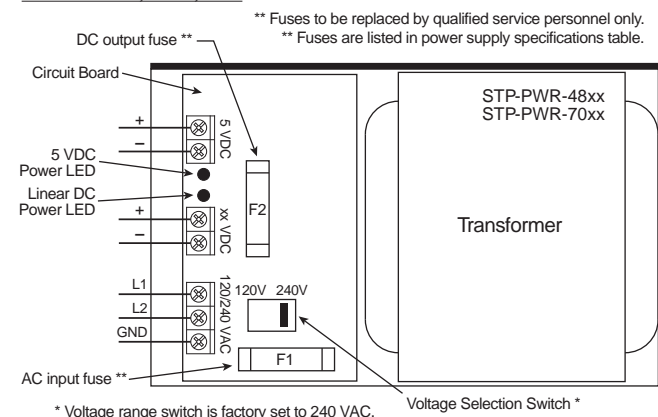

** Fuses to be replaced by qualified service personnel only.
** Fuses are listed in power supply specifications table.

Mounting the Power Supply

STP-PWR-xxxx power supplies can be mounted on either the bottom (wide) side, or the back (narrow) side of the chassis. Either orientation contains mounting holes for machine screws. Use #10 screws for STP-PWR-3204 and -4805, or 1/4" screws for STP-PWR-4810 and -7005.


WARNING

Never use the power supply in a space where there is no air flow, or where the surrounding air temperature is greater than 70 °C. Since power supplies generate heat, they should be securely fastened to a smooth, flat metal surface that will dissipate heat.

Stepping System Power Supplies
STP-PWR-3204, -4805, -4810, -7005


Dimensions

STP-PWR-3204

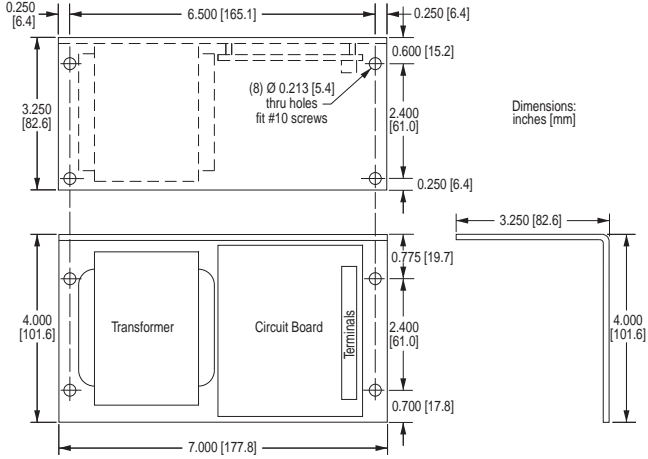

Dimensions

STP-PWR-4805, -4810, -7005

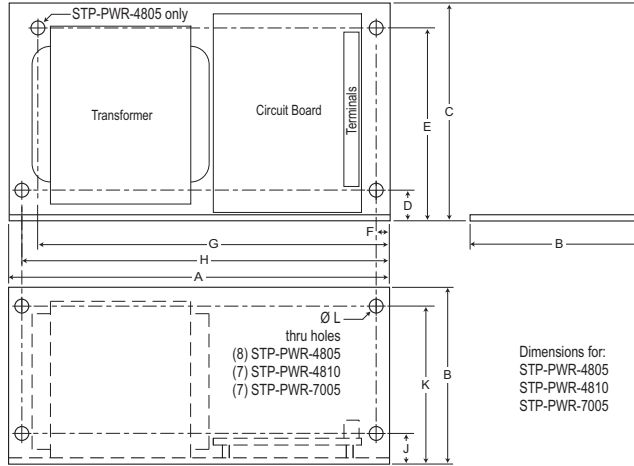

SureStep™ Series Dimensions – 48V & 70V Power Supplies			
Dimensions* (in [mm])*	Power Supply Part Number		
	STP-PWR-4805	STP-PWR-4810	STP-PWR-7005
A	8.10 [205.7]		9.00 [228.6]
B	3.88 [98.6]		4.62 [117.3]
C	5.00 [127.0]		5.62 [142.7]
D	0.87 [22.1]		1.56 [39.6]
E	4.67 [118.6]		4.06 [103.1]
F	0.25 [6.4]		0.35 [8.9]
G	7.15 [181.6]		n/a
H	7.75 [196.9]		8.59 [218.2]
J	0.50 [12.7]		0.50 [12.7]
K	3.53 [89.7]		4.27 [108.5]
L	0.200 [5.1]		9/32 [7.1]
Mtg Screw	#10		1/4

** mm dimensions are for reference purposes only.*