

SureStep[®] Stepping System Drives

Microstepping Drives

SureStep[®] Series Specifications – Microstepping Drives				
Microstepping Drive	STP-DRV-4035	STP-DRV-4850	STP-DRV-80100	
Price	<--->	<--->	<--->	
Drive Type	Microstepping drive with pulse input	Advanced microstepping drive with pulse or analog input, serial communication (serial communication allows indexing capability)		
Output Current	selectable from 0.4 to 3.5 A/phase (maximum output power is 140 W)	0.1-5.0 A/phase (in 0.01A increments)	0.1-10.0 A/phase (in 0.01A increments)	
Input Voltage (external p/s required)	12-42 VDC (including ripple voltage)	24-48 VDC (nominal) (range: 18-53 VDC)	24-80 VDC (nominal) (range: 18-88 VDC)	
Configuration Method	dip switches	SureStep Pro software (included)		
Amplifier Type	MOSFET, dual H-bridge, bipolar chopper	MOSFET, dual H-bridge, 4-quadrant		
Current Control	3-state PWM 20 kHz	4-state PWM @ 20 kHz		
Protection	n/a	over-voltage, under-voltage, over-temperature, external output faults (phase-to-phase & phase-to-ground), inter-amplifier shorts		
Recommended Input Fusing	Fuse: 4A fast acting; ADC # ACG4 Fuse Holder: ADC # DN-F6L110	Fuse: 4A 3AG delay (ADC #MDL4) Fuse Holder: ADC #DN-F6L110	Fuse: 6.25A 3AG delay (ADC #MDL6-25) Fuse Holder: ADC #DN-F6L110	
Input Signals	Input Circuit	Opto-coupler input with 440Ω resistance (5 to 15 mA input current); Logic Low is input 0.8 VDC or less; Logic High is input 4 VDC or higher.		
	Step/Pulse	Motor steps on falling edge of pulse and minimum pulse width is 0.5 microseconds (1MHz)		
	Direction	Needs to change at least 2 microseconds before a step pulse is sent		
	Enable	Logic 1 will disable current to the motor (current is enabled with no hook-up or logic 0)		
	Analog	n/a		
Output Signal	n/a	optically isolated, 24V, 10mA max; FUNCTIONS: fault, motion, tach		
Communication Interface	n/a	RS-232; RJ11 (6P4C) receptacle		
Non-volatile Memory Storage	n/a	Configurations are saved in FLASH memory on-board the DSP.		
Features	Idle Current Reduction	0% or 50% reduction (idle current setting is active if motor is at rest for 1 second or more)		
	Microstep Resolution	400 (200x2), 1,000 (200x5), 2,000 (200x10), or 10,000 (200x50) steps/rev		
	Modes of Operation	step & direction		
	Phase Current Setting	0.4 to 3.5 A/phase with 32 selectable levels	0.1-5.0 A/phase (in 0.01A increments)	0.1-10.0 A/phase (in 0.01A increments)
	Self Test	uses half-step to rotate 1/2 revolution in each direction at 100 steps/second		
	Additional Features	n/a	Anti-resonance (Electronic Damping) Auto setup Microstep emulation Torque ripple smoothing (allows for fine adjustment of phase in the range 0.25 to 1.5 rps) Waveform (command signal) smoothing	
Connectors	Screw terminal blocks with AWG 18 maximum wire size		Communication: RJ11 (6P4C); Other: removable screw terminal blocks	
Maximum Humidity	90% non-condensing			
Storage Temperature	-20 to 80 °C [-4 to 176 °F]			
Operating Temperature	0 to 55 °C [32 to 131 °F] recommended; 70 °C [158 °F] maximum		0-55 °C [32-151 °F]; (mount to suitable heat sink)	
Drive Cooling Method	natural convection (mount drive to metal surface to dissipate heat)		natural convection (mount to suitable heat sink)	
Mounting	(4) #4 screws to mount on wide side; (2) #4 screws to mount on narrow side		#6 mounting screws (mount to suitable heat sink)	
Dimensions	3.0 x 4.0 x 1.5 inches [76.2 x 101.6 x 38.1 mm]		3.0 x 3.65 x 1.125 inches [76.2 x 92.7 x 28.6 mm]	
Weight	9.3 oz. [264 g]		8 oz [227g] (approximate)	
Agency Approvals	CE (complies with EN55011A & EN50082-1 (1992)), RoHS		CE, RoHS	

SureStep® Stepping System Software

Microstepping Drives

- Company Information
- Systems Overview
- Programmable Controllers
- Field I/O
- Software
- C-more & other HMI
- Drives
- Soft Starters
- Motors & Gearbox

SureStep® Drives Modes of Operation

Drive Part #	Step & Direction (1)	CW/CCW (1)	A/B Quadrature (1)	Oscillator (Analog Input) (2)	Serial Command (Indexing) (3)
STP-DRV-4035	Y	-	-	-	-
STP-DRV-4850	Y	Y	Y	Y	Y
STP-DRV-80100	Y	Y	Y	Y	Y

1) Pulse Inputs: Refer to the charts at the end of the SureStep section for PLC compatibility.


2) Analog Inputs: Use any 0-5V analog output card. Advanced drives (-4850 & -80100) also have a built-in +5VDC for use with potentiometers.

3) Serial Commands: use any controller that has ASCII capability.

SureStep Pro Drive Configuration Software

The SureStep advanced drives (STP-DRV-4850 & -80100) include SureStep Pro configuration software on CD.


- Used for easy configuration and setup of the drive, including drive, motion control mode, I/O, motor.
- Serial command language for motor drive control via serial port; eliminates the need for separate motion controllers or indexers; provides easy interface to other industrial devices such as PCs, PLCs and HMIs.
- Easily use the ASCII output commands from most of our PLCs to enable indexing capability.
- Help files include technical data, application information, advanced setup, serial command instructions.
- Runs on Windows Vista, XP, 2000, NT, ME, 98.

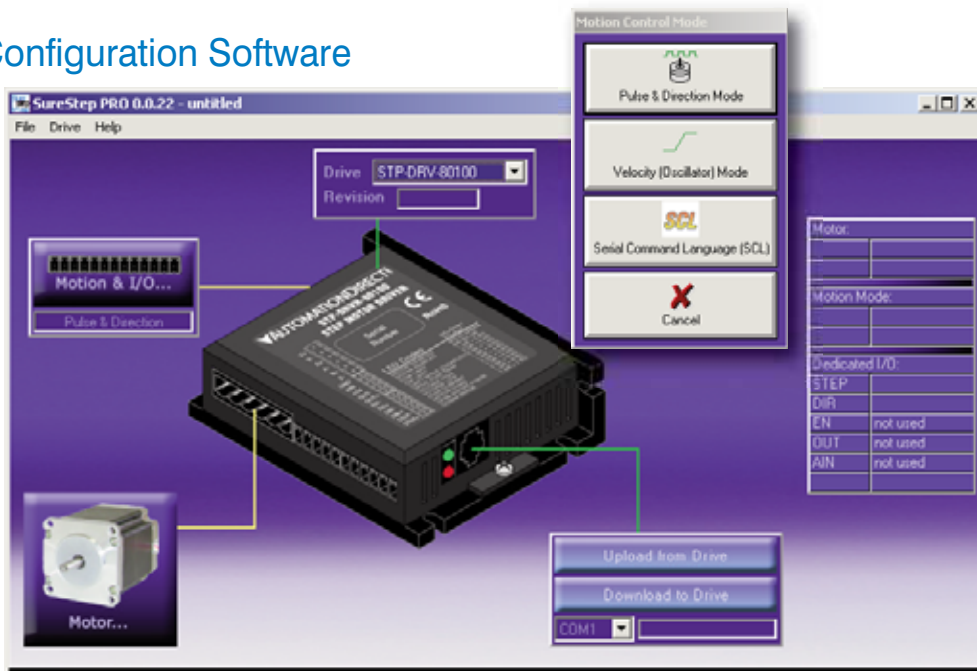


- Steppers/ Servos
- Motor Controls
- Proximity Sensors
- Photo Sensors
- Limit Switches
- Encoders
- Current Sensors
- Pressure Sensors
- Temperature Sensors
- Pushbuttons/ Lights
- Process
- Relays/ Timers
- Comm.

Microstepping Drive Dimensions

STP-DRV-4035

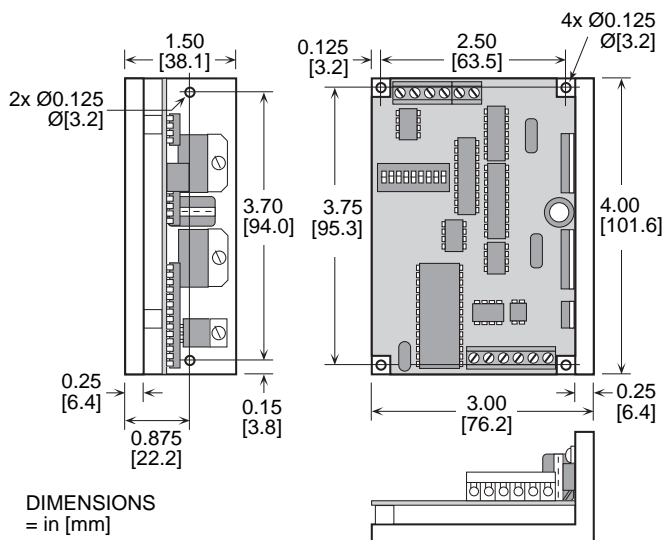


STP-DRV-4850 & -80100

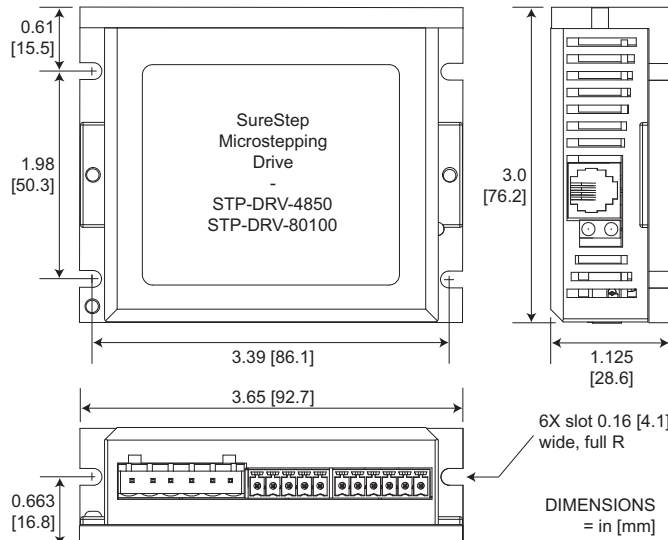

- Terminal Blocks & Wiring
- Power
- Circuit Protection
- Enclosures
- Tools
- Pneumatics
- Safety
- Appendix
- Product Index
- Part # Index

SureStep[®] Stepping Systems

System Overview

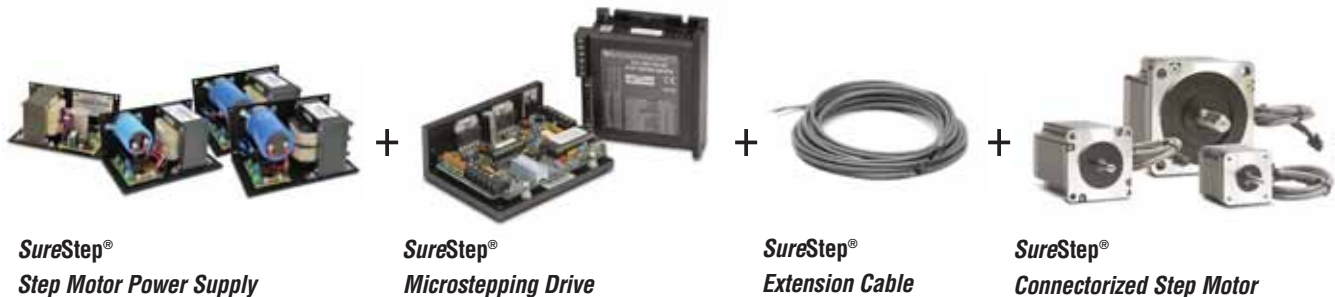

The SureStep[®] stepping system series includes:

- Four step motor power supplies
- One DIP-switch configurable microstepping drive
- Two software configurable advanced microstepping drives
- Two motor extension cables
- Nine step motors (NEMA 17, 23, 34 frame sizes)

Standard stepper drive features

- Max 3.5A, 40V
- DIP switch configurable
- Selectable microstepping: x2, x5, x10, x50 steps/revolution
- Self test feature
- Idle current reduction

Advanced stepper drive features

- Max 5A, 48V and max 10A, 80V models available
- Software configurable
- Programmable microsteps
- Internal indexer (via ASCII commands)
- Self test feature
- Idle current reduction
- Anti-resonance
- Torque ripple smoothing
- Step, analog, & serial communication inputs
- Serial communications allow point-to-point positioning

Motor features

- High torque, 2-phase, bipolar, 1.8° per step, 4-lead
- (2) NEMA 17 motors
- (3) NEMA 23 motors
- (4) NEMA 34 motors

Power supply features

- Linear, unregulated DC power supplies
- 120/240 VAC selectable input
- 32V, 48V, 70V DC output models available
- All models have additional 5VDC, 500 mA regulated logic supply
- Fusing included for both incoming AC and outgoing DC
- 5V supply has electronic overload protection

SureStep Part Number Explanation

STP- MTR H - 23079


Component Capacity

For DRV: 2-digit max nominal voltage followed by max current with 1 implied decimal place
 4035: 40V, 3.5A
 4850: 48V, 5.0A
 80100: 80V, 10.0A
 For EXT(H): cable length in feet
 For MTR(H): 2-digit NEMA frame size followed by approximate length in mm
 For PWR: 2-digit output voltage followed by output current

Component Type

DRV: stepper drive
 EXT: motor extension cable
 EXTH: high-power motor extension cable
 MTR: stepper motor
 MTRH: high-power stepper motor
 PWR: power supply

SureStep Series Designation: STP

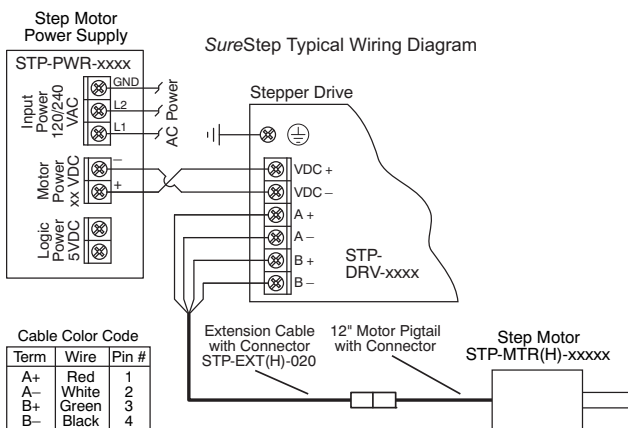

SureStep[®] System Recommended Component Compatibility

Drives (1)	Power Supplies (1)	Motors & Extension Cables (2,3)
STP-DRV-4035	-	-
STP-DRV-4850	-	STP-PWR-4805 STP-PWR-3204
STP-DRV-80100	STP-PWR-7005 STP-PWR-4810	STP-MTR-xxxxx & STP-EXT-020 STP-MTRH-xxxxx & STP-EXTH-020

1) Caution: Do not use a power supply that exceeds the drive input voltage range. Using a lower voltage power supply with a higher voltage drive is acceptable, but will not provide full system performance.

2) MTR motors have connectors compatible with the EXT extension cables.

3) MTRH motors have connectors compatible with the EXTH extension cables.

Wiring Solutions using the ZIPLink Wiring System

ZIPLinks eliminate the normally tedious process of wiring between devices by utilizing prewired cables and DIN rail mount connector modules. It's as simple as plugging in a cable connector at either end or terminating wires at only one end. Prewired cables keep installation clean and efficient, using half the space at a fraction of the cost of standard terminal blocks. There are several wiring solutions available when using the ZIPLink System ranging from

PLC I/O-to-ZIPLink Connector Modules that are ready for field termination, options for connecting to third party devices, GS, DuraPulse and SureServo Drives, and specialty relay, transorb and communications modules. Pre-printed I/O-specific adhesive label strips for quick marking of ZIPLink modules are provided with ZIPLink cables. See the following solutions to help determine the best ZIPLink system for your application.

Solution 1: DirectLOGIC, CLICK and Productivity3000 I/O Modules to ZIPLink Connector Modules

When looking for quick and easy I/O-to-field termination, a ZIPLink connector module used in conjunction with a prewired ZIPLink cable, consisting of an I/O terminal block at one end and a multi-pin connector at the other end, is the best solution.



Using the PLC I/O Modules to ZIPLink Connector Modules selector tables located in this section,

1. Locate your I/O module/PLC.
2. Select a ZIPLink Module.
3. Select a corresponding ZIPLink Cable.

Solution 2: DirectLOGIC, CLICK and Productivity3000 I/O Modules to 3rd Party Devices

When wanting to connect I/O to another device within close proximity of the I/O modules, no extra terminal blocks are necessary when using the ZIPLink Pigtail Cables. ZIPLink Pigtail Cables are prewired to an I/O terminal block with color-coded pigtail with soldered-tip wires on the other end.



Using the I/O Modules to 3rd Party Devices selector tables located in this section,

1. Locate your PLC I/O module.
2. Select a ZIPLink Pigtail Cable that is compatible with your 3rd party device.

Solution 3: GS Series and DuraPulse Drives Communication Cables

Need to communicate via Modbus RTU to a drive or a network of drives?

ZIPLink cables are available in a wide range of configurations for connecting to PLCs and SureServo, SureStep, Stellar Soft Starter and AC drives. Add a ZIPLink communications module to quickly and easily set up a multi-device network.

Using the Drives Communication selector tables located in this section,

1. Locate your Drive and type of communications.
2. Select a ZIPLink cable and other associated hardware.



Drives

Soft Starters

Motors & Gearbox

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Safety

Appendix

Product Index

Part # Index

Solution 4: Serial Communications Cables

ZIPLink offers communications cables for use with *Direct*LOGIC, CLICK, and Productivity3000 CPUs, that can also be used with other communications devices. Connections include a 6-pin RJ12 or 9-pin, 15-pin and 25-pin D-sub connectors which can be used in conjunction with the RJ12 or D-Sub Feedthrough modules.

Using the **Serial Communications Cables** selector table located in this section,

1. Locate your connector type
2. Select a cable.



Solution 5: Specialty ZIPLink Modules

For additional application solutions, ZIPLink modules are available in a variety of configurations including stand-alone relays, 24VDC and 120VAC transorb modules, D-sub and RJ12 feedthrough modules, communication port adapter and distribution modules, and SureServo 50-pin I/O interface connection.

Using the **ZIPLink Specialty Modules** selector table located in this section,

1. Locate the type of application.
2. Select a ZIPLink module.



Solution 6: ZIPLink Connector Modules to 3rd Party Devices

If you need a way to connect your device to terminal blocks without all that wiring time, then our pigtail cables with color-coded soldered-tip wires are a good solution. Used in conjunction with any compatible ZIPLink Connector Modules, a pigtail cable keeps wiring clean and easy and reduces troubleshooting time.

Using the **Universal Connector Modules and Pigtail Cables** table located in this section,

1. Select module type.
2. Select the number of pins.
3. Select cable.



Drive / Motor Controller (GS/DuraPulse/SureServo/SureStep/Stellar) ZIPLink Selector									
Drive / Motor Controller		Communications			ZIPLink Cable				
Controller	Comm Port Type	Network/Protocol	Connects to	Comm Port Type	Cable (2 meter length)	Cable Connectors	Other Hardware Required		
GS1	RJ12	RS-485 Modbus RTU	DL06 PLCs	Port 2 (HD15)	GS-485HD15-CBL-2	RJ12 to HD15	—		
			D2-260 CPU				—		
			GS-EDRV100	RJ12		GS-EDRV-CBL-2	RJ12 to RJ12	—	
			ZL-CDM-RJ12Xxx*	RJ12		GS-485RJ12-CBL-2		—	
FA-ISOCOCON	5-pin Connector	GS-ISOCOCON-CBL-2	RJ12 to 5-pin plug	—					
GS2	RJ12	RS-232 Modbus RTU	CLICK PLCs	Port 2 (RJ12)	GS-RJ12-CBL-2	RJ12 to RJ12	—		
			DL05 PLCs				—		
			DL06 PLCs	Port 2 (HD15)			FA-15HD		
			D2-250-1 CPU						
			D2-260 CPU						
			D4-450 CPU	Port 3 (25-pin)				FA-CABKIT	
		P3-550 CPU	Port 2 (RJ12)	—					
		RS-485 Modbus RTU	DL06 PLCs	Port 2 (HD15)		GS-485HD15-CBL-2		RJ12 to HD15	—
			D2-260 CPU				—		
			GS-EDRV100	RJ12			GS-EDRV-CBL-2	RJ12 to RJ12	—
			ZL-CDM-RJ12Xxx*	RJ12			GS-485RJ12-CBL-2		—
			FA-ISOCOCON	5-pin Connector			GS-ISOCOCON-CBL-2	RJ12 to 5-pin plug	—
DuraPulse (GS3)	RJ12		RS-485 Modbus RTU	DL06 PLCs	Port 2 (HD15)		GS-485HD15-CBL-2	RJ12 to HD15	—
		D2-260 CPU		—					
		GS-EDRV100		RJ12	GS-EDRV-CBL-2	RJ12 to RJ12		—	
		ZL-CDM-RJ12Xxx*		RJ12	GS-485RJ12-CBL-2			—	
FA-ISOCOCON	5-pin Connector	GS-ISOCOCON-CBL-2	RJ12 to 5-pin plug	—					
SureServo	IEEE1394 (CN3)	RS-232 Modbus RTU	CLICK PLCs	Port 2 (RJ12)	SVC-232RJ12-CBL-2	6-pin IEEE to RJ12	—		
			DL05 PLCs				—		
			DL06 PLCs	Port 2 (HD15)			FA-15HD		
			D2-250-1 CPU						
			D2-260 CPU						
			D4-450 CPU	Port 3 (25-pin)				FA-CABKIT	
		P3-550 CPU	Port 2 (RJ12)	—					
		RS-485 Modbus RTU	DL06 PLCs	Port 2 (HD15)		SVC-485HD15-CBL-2		6-pin IEEE to HD15	—
			D2-260 CPU				—		
			ZL-CDM-RJ12Xxx*	RJ12			SVC-485RJ12-CBL-2	6-pin IEEE to RJ12	—
			USB-485M	RJ45			SVC-485CFG-CBL-2	6-pin IEEE to RJ45	—
			Stellar (Soft Starter) SR44 Series	RJ45**			RS-485 Modbus RTU	DL06 PLCs	Port 2 (HD15)
D2-250-1 CPU									
D2-260 CPU	RJ12	SR44-485RJ45-CBL-2			RJ45 to RJ12				
ZL-CDM-RJ12Xxx*									
SureStep	RJ12	RS-232 ASCII	DL06 PLCs	Port 2 (HD15)	STP-232HD15-CBL-2	HD15-pin to RJ12	—		
			D2-250-1 CPU						
			D2-260 CPU (Port2)				—		
			DL05 PLCs	RJ12		STP-232RJ12-CBL-2	RJ12 to RJ12	—	
			CLICK PLCs					—	

* When using the ZL-CDM-RJ12Xxx ZIPLink Communication Distribution Module, replace the lowercase xx with the number of RJ12 ports, i.e.4 for four ports or10 for ten ports. (ex: ZL-CDM-RJ12X4 or ZL-CDM-RJ12X10)

** The SR44-RS485 Communications Adapter must be installed for RS-485 communications with the Stellar soft starters.