

General Specifications	
Operating Temperature	0° to 60°C (32° to 140°F)
Storage Temperature	-20° to 85°C (-4° to 185°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC60068-2-6 (Test Fc)
Shock	IEC60068-2-27 (Test Ea)
Enclosure Type	Open Equipment
Agency Approvals	UL61010-2 - UL File # E185989 Canada and USA CE Compliant EN61131-2*
Noise Immunity	NEMA ICS3-304
EU Directive	See the "EU Directive" topic in the Help File
Weight	295g (10.4 oz)



*Meets EMC and Safety requirements. See the D.O.C. for details.

Power Supply Specifications	
Nominal Voltage Range*	12–24 VDC
Input Voltage Range (Tolerance)*	10–36 VDC
Maximum Input Voltage Ripple	<± 10%
Maximum Input Power	30W
Cold Start Inrush Current	5A, 2ms
Maximum Inrush Current (Hot Start)	5A, 2ms
Internal Input Protection	Reverse Polarity Protection and Undervoltage
Heat Dissipation	3.2W Max
Voltage Withstand (dielectric)	1500VAC Power Inputs to Ground applied for 1 minute

*Class 2 or LPS Power Supply required.

CPU Specifications	
Program Memory Type	FLASH memory
User Data Memory Type	Battery Backed RAM, User configurable
Pluggable Option Module	RS-232, RS-485, Ethernet 10/100 BASE-T (1Mbps throughput max), USB 2.0 Type B
Expansion Modules	8 expansion modules max
Real Time Clock Accuracy	±2.6s per day typical at 25°C ±8s per day max at 60°C
Programming Software	Do-more Designer – Ver. 2.0 or higher
Programming Cable Options	BX-PGM-CBL
Custom Label Window Size	0.75" x 2.25" (19mm x 57.2mm)

Terminal Block Connection Options	
BX-RTB18	Terminal Block Kit, 90-degree screw type, Fits all BRX 18-point PLCs. Kit includes (3) 5-pin 5mm plugs, (2) 6-pin 5mm plugs, (1) 3-pin 5mm plugs.
BX-RTB18-1	Terminal Block Kit, 180-degree spring clamp type, Fits all BRX 18-point PLCs. Kit includes (3) 5-pin 5mm plugs, (2) 6-pin 5mm plugs, (1) 3-pin 5mm plugs.
ZL-BX-CBL15	ZI PLink PLC I/O cable, 15-position terminal block to 24-pin connector, 24AWG. 0.5 meter (1.6 ft.) length, 2 required.
ZL-BX-CBL15-1	ZI PLink PLC I/O cable, 15-position terminal block to 24-pin connector, 24AWG. 1 meter (3.3 ft.) length, 2 required.
ZL-BX-CBL15-2	ZI PLink PLC I/O cable, 15-position terminal block to 24-pin connector, 24AWG. 2 meter (6.6 ft.) length, 2 required.
ZL-BX-CBL15-1P	ZI PLink PLC I/O cable, 15-position terminal block to pigtail connection, 24AWG. 1 meter (3.3 ft.) length, 2 required.
ZL-BX-CBL15-2P	ZI PLink PLC I/O cable, 15-position terminal block to pigtail connection, 24AWG. 2 meter (6.6 ft.) length, 2 required.
ZL-RTB20	ZI PLink Two-Level Feedthrough Module. 20 pole, 35mm DIN mount, 2 required.
ZL-RTB20-1	ZI PLink Three-Level Feedthrough Module. 20 pole, 35mm DIN mount, 2 required.

Built-in RS-232/485 Port Specifications													
Port Name	RS-232/RS-485 Serial Port												
Description*	Non-isolated serial port that can communicate via RS-232 or RS-485 (software selectable). Includes ESD protection and built-in surge protection.												
Supported Protocols	Do-more Protocol (Default) Modbus RTU (Master & Slave) K-Sequence (Slave) ASCII (In & Out)												
Data Rates	1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200												
Default Settings	RS-232, 115200 bps, No Parity, 8 Data Bits, 1 Stop Bit, Station #1												
Port Type	3-pin terminal strip 3.5mm pitch												
Port Status LED	Green LED is illuminated when active for TXD and RXD												
RS-485 Station Addresses	1-247												
Cable Recommendations	RS-232 use L19772-XXX from AutomationDirect.com RS-485 use L19827-XXX from AutomationDirect.com												
Replacement Connector	ADC Part # BX-RTB03S												
<div><div></div><div><div><div>TX</div><div>RX</div><div></div></div><div></div><div><div>GND</div><div>RX/D-</div><div>TX/D+</div></div><div>RS232/RS485</div></div></div> <table><tr><th>Pinout</th><th>RS232</th><th>RS485</th></tr><tr><td>1</td><td>GND</td><td>GND</td></tr><tr><td>2</td><td>RX</td><td>D-</td></tr><tr><td>3</td><td>TX</td><td>D+</td></tr></table>		Pinout	RS232	RS485	1	GND	GND	2	RX	D-	3	TX	D+
Pinout	RS232	RS485											
1	GND	GND											
2	RX	D-											
3	TX	D+											

Removable connector included.

* NOTE: When using RS-485, a terminator resistor is built-in and software selectable.

CPU Mode Switch Functions	
RUN position	CPU is forced into RUN Mode if no errors are encountered.
TERM position	RUN, PROGRAM and DEBUG modes are available. In this position, the mode of operation can be changed through the Do-more Designer Software.
STOP position	CPU is forced into STOP Mode.




BX-DM1E-18ER3-D
BRX MPU with Do-more! DM1 technology
24 VDC required, serial port, Ethernet port, microSD slot, Discrete Input: 10-point, sink / source, Analog Input: 1-channel, current / voltage, Discrete Output: 8-point, relay, Analog Output: 1-channel, current / voltage.

I/O Terminal Blocks sold separately.
(See Terminal Block Connection Options table).


Document Name	Edition/Revision	Date
BX-DM1E-18ER3-D	1st Ed. RevD	9/8/2021

Copyright 2021, AutomationDirect.com Incorporated/All Rights Reserved Worldwide.

Dimensional Information

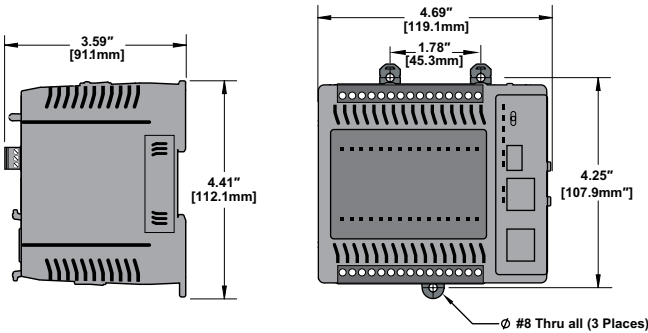

Mounting Restrictions

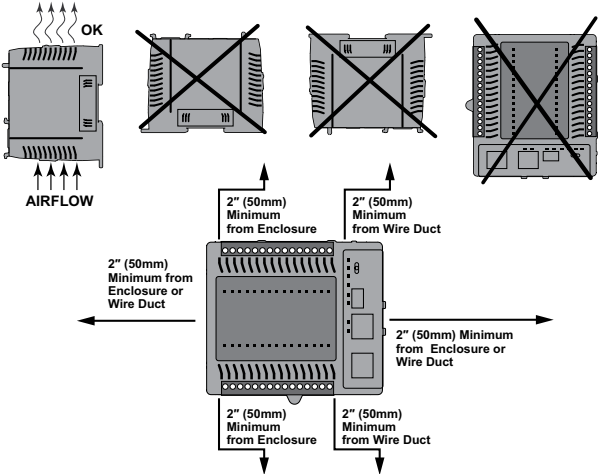

Terminal Block Connector Specifications			
Part Number	BX-RTB03S	BX-RTB18	BX-RTB18-1
Connector Type	Screw Type-90°	Screw Type-90°	Spring Clamp Type-180°
Wire Exit	180°	180°	180°
Pitch	3.5mm	5.0mm	5.0mm
Screw Size	M2	M2.5	N/A
Recommended Screw torque	<1.77 lb·in (0.2 N·m)	< 3.98 lb·in (0.45 N·m)	N/A
Screwdriver Blade Width	2.5mm	3.5mm	3.5mm
Wire Gauge (Single Wire)	28-16 AWG	28-12 AWG	28-14 AWG
Wire Gauge (Dual Wire)	28-16 AWG	28-16 AWG	28-16 AWG (Dual Wire Ferrule Required)
Wire Strip Length	0.24in (6mm)	0.3in (7.5mm)	0.37in (9.5mm)
Equiv. Dinkle part #	EC350V-03P-BK	5ESDV-0nP-BK*	5ESDSR-0nP-BK*

*NOTE: n=(3) 3-terminal, (5) 5-terminal, or (6) for 6-terminal

CPU Status Indicators		
Indicator	Status	Description
PWR	OFF	Base Power OFF
	Green	Base Power ON
	Yellow	Low Battery
RUN	OFF	CPU is in STOP Mode
	Green	CPU is in RUN Mode
	Yellow	Forces are Active
MEM	OFF	No ROM Activity, No SD Card
	Yellow	ROM Activity (Flash or SD Card)
	Green	SD Card Installed and Mounted
	Red	SD Card Installed and Not Mounted
ERR	OFF	CPU is functioning normally
	Red	CPU Fatal Hardware Error or Software Watchdog Error

Built-in Ethernet Specifications	
Port Name	ETHERNET
Description	Standard transformer isolated Ethernet port with built-in surge protection.
Transfer Rate	10Mbps (Yellow LED) and 100Mbps (Green LED)
Port Status LED	LED is solid when network LINK is established. LED flashes when port is active (ACT).
Supported Protocols	Do-more! Protocol Ethernet Remote I/O Modbus TCP/IP (Client & Server) EtherNet/IP (Explicit Messaging) HOST ECOM (DirectLogic), HTTP SMTP (Email), SNMP (Time Server) TCP/IP, UDP/IP (Raw packet) MQTT
Cable Recommendation	C5E-STxxx-xx from AutomationDirect.com
Port Type	RJ45, Category 5, 10/100 BASE-T, Auto Crossover
Ethernet Port Numbers:	
MODBUS TCP/IP	502, TCP
EtherNet/IP (Explicit Messaging)	44818, TCP
HOST ECOM	28784, UDP
Do-more Protocol	28784, UDP

Do-more BRX Manual available at
[www.automationdirect.com/pn/doc/
manual/BX-DM1E-18ER3-D](http://www.automationdirect.com/pn/doc/manual/BX-DM1E-18ER3-D)




IMPORTANT!






Hot-Swapping Information

Note: This device cannot be Hot Swapped.

Terminal and Front Panel Layout


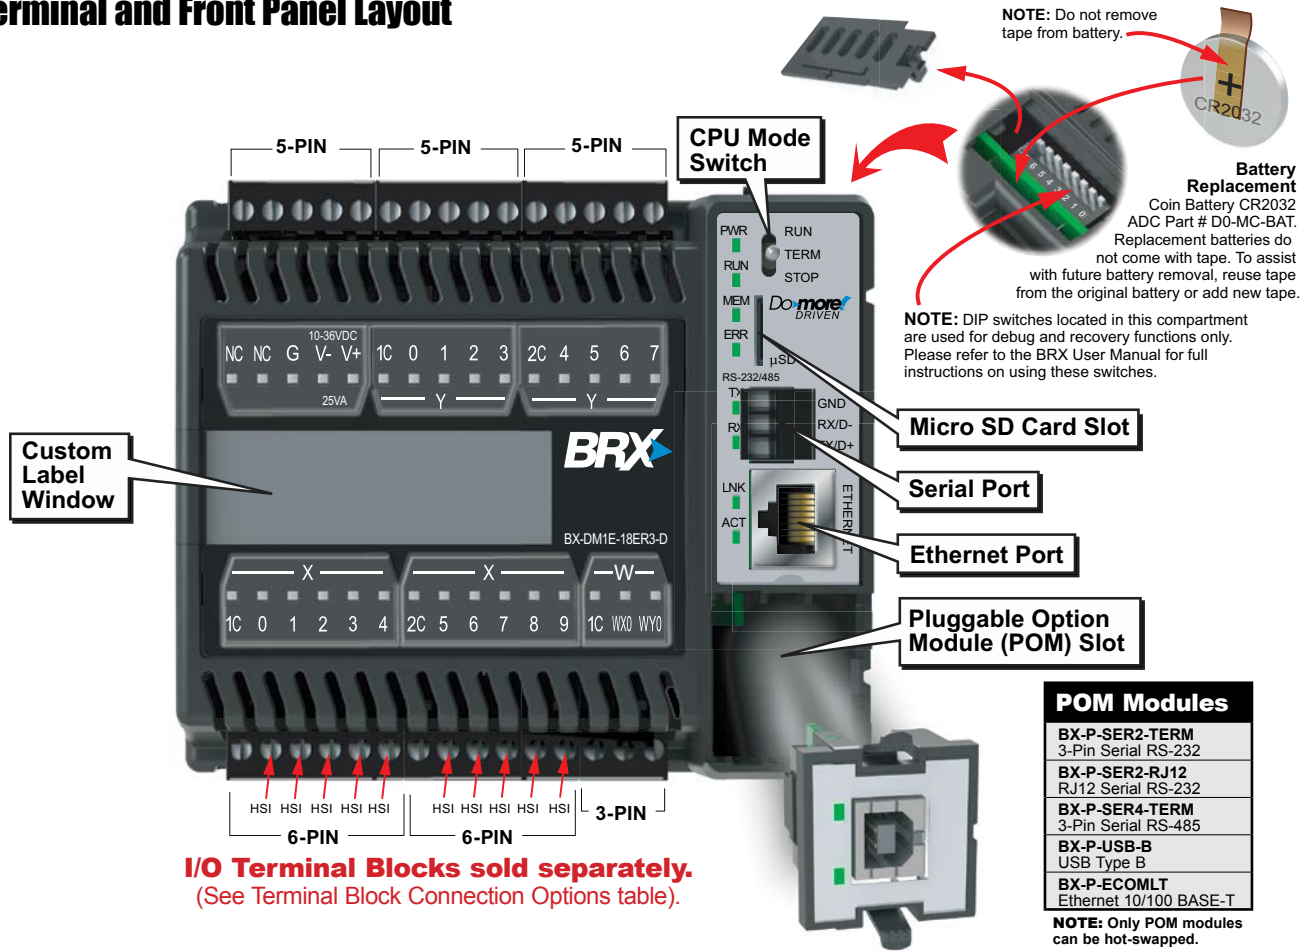


Analog Current Sinking Input Circuits

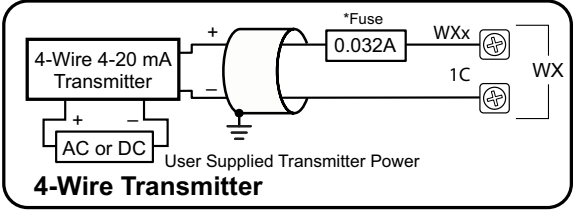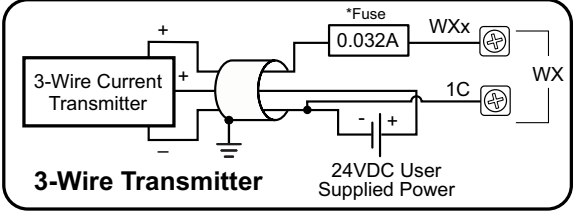
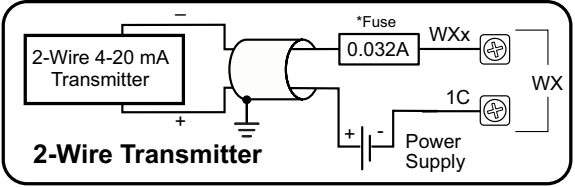


*NOTE: An Edison S500-32-R 0.032A fast-acting fuse is recommended for all analog voltage inputs, analog outputs, and current loops.

Analog Output Wiring

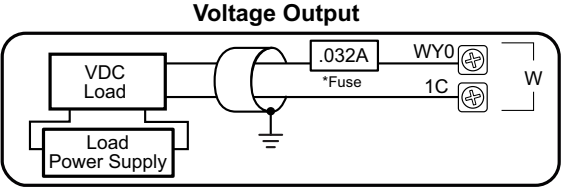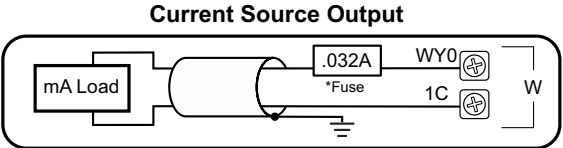

Analog Voltage Input Circuits

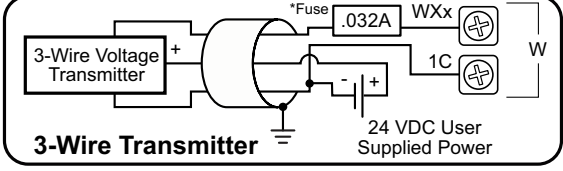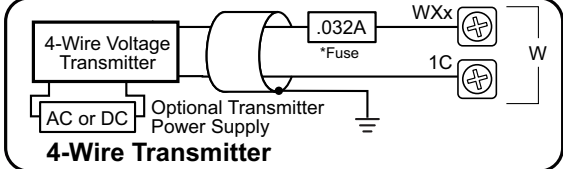

Discrete Input Specifications	
Input Type	Sink/Source
Total Inputs per Module	10 High Speed – All inputs may be used as standard inputs
Commons	2 (5 points/common) Isolated
Nominal Voltage Rating	12–24 VAC/DC
Input Voltage Range	9–30 VAC/DC
Maximum Voltage	30 VAC/DC
DC Frequency	0–250kHz - High Speed
Minimum Pulse Width	0.5 μs - High Speed
AC Frequency	47–63 Hz (60–240Hz filter must be set in software for AC operation)
Input Impedance	3kΩ @ 24VDC
Input Current (typical)	6mA @ 24 VAC/DC
Maximum Input Current	12mA @ 30 VAC/DC
Maximum OFF Current	2.0 mA
ON Voltage Level	> 9.0 VAC/VDC
OFF Voltage Level	< 2.0 VAC/VDC
Status Indicators	Logic Side, Green

Discrete Output Specifications	
Output Type	Relay Form A (SPST)
Total Outputs per Module	8 Relay
Commons	2 (4 points/common) Isolated
Maximum current per common	8A
Nominal Voltage Ratings	12–48 VDC, 24–240 VAC
Operating Voltage Range	5–60 VDC, 5–264 VAC
Maximum Voltage	60VDC, 264VAC
Minimum Output Current	0.1mA @ 24VAC/DC
Maximum Output Current	2A
Maximum Leakage Current	1μA (DC), 300μA (AC) due to RC snubber
Maximum Switching Frequency	10Hz
Status Indicators	Logic Side, Green

High Speed Input (HSI) Functions			
Input Function	Inputs Required ¹	10/10E	18/18E
High-Speed Counting	1	Up to (3)	Up to (3)
	1		
	2		
	2		
	2		
	3		
Interval Measurement	1	Up to (4)	Up to (4)
	2		
Duration Measurement	1	Up to (4)	Up to (4)
	1		
Table-Driven Output(s) ²		Up to (4)	Up to (4)
Interrupt(s)	4	Up to (4)	Up to (4)
	0		

1. Standard inputs may be used with high-speed functions, but at lower response frequencies of approximately 120Hz.
2. Table Driven Output(s) are triggered by an Axis Position or a high-speed counter/timer accumulator value. It requires the selection of 1 discrete output. (see HSO Note 1 below)

Analog Input Specifications	
Inputs per Module	1
Input Voltage Range*	Software Selectable ±10V, ±5V, 0-10V, 0-5V
Input Current Range*	Software Selectable ±20mA, 4-20 mA
Resolution	16 bit @ ± 10V, ± 20mA
Conversion Time	1.2 ms
Input Impedance Voltage Modes	100kΩ
Input Impedance Current Modes	249Ω




*Software selectable per channel.

Analog Output Specifications	
Outputs per Module	1
Output Voltage Range*	Software Selectable ±10V, ±5V, 0-10V, 0-5V
Minimum Voltage Load Impedance	1kΩ
Output Current Range*	Software Selectable ±20mA, 4-20 mA
Maximum Current Load Impedance	500Ω
Settling Time	< 1ms
Resolution	16 bit @ ± 10V, ± 20mA


*Software selectable per channel.

I/O Wiring

Discrete Input Wiring



Discrete Output Wiring



Supply Power Wiring

