


22 mm Metal Pilot Devices Specifications


Assembly information

These pushbuttons and indicator lights are supplied with the appropriate contact blocks, unless otherwise indicated. Use these drawings as a guide to make sure there is adequate clearance behind the panel.

Pushbuttons and selector switches

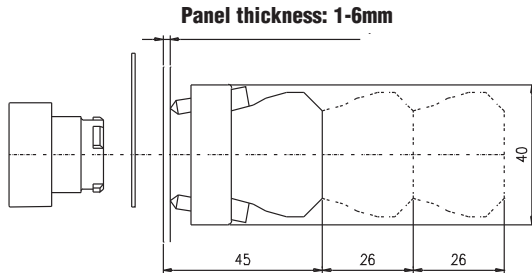


Lighted pushbuttons and selector switches/pilot lights

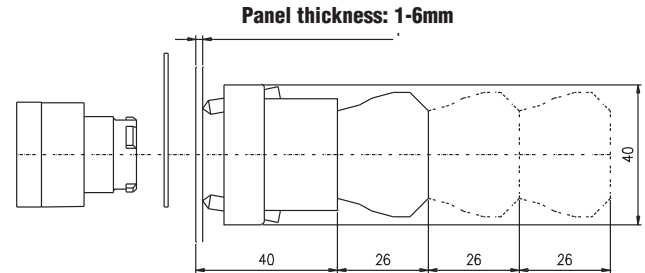


Panel holes

For safe operation, use these mounting hole drawings to ensure that there is adequate space between switches.



This layout is suitable if all switches are 230V or less and the same polarity.


NOTE: Contact blocks can be arranged up to three deep by three wide.

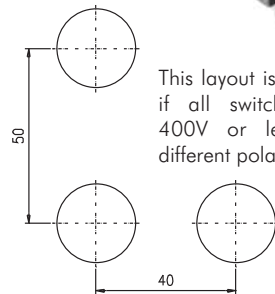

This layout is suitable if all switches are 400V or less and different polarity.

All dimensions are in millimeters. 25.4mm = 1 inch. For example, 30 mm in inches = 30/25.4 = 1.181 inches.

Typical Wiring

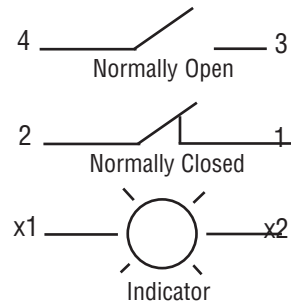

Specifications


These specifications apply to all 22 mm metal pushbuttons and switches.

Physical Specifications		Electrical Specifications	
Standards Reference	CEI EN 60947-5-1, CSA C22-2 n.14	Rated Thermal Current (contact block)	A300, Q300 (Refer to page e25-51, for more information.)
Approvals	CSA, IMQ (where specified), UL File E189258	Rated Insulation Voltage	Ui 660V according to CEI EN 60947-5-1, 300V according to CSA C22-2 n.14
Enclosure Material	Zn + Al + Mg alloy, chromium plated	Dielectric Strength	3KV (1 second)
Contacts Material	Gold plated silver	Insulation Resistance	2MΩ min. (500VDC)
Protection Degree	IP 40 for GCX3151-24, GCX3151-120, GCX3153-24 and GCX3153-120. IP 65 for all others. (See Appendix of this catalog for explanation of IP ratings according to IEC 144 CEI 70-1.)	Initial Contact Resistance	≤25mΩ
Temperature Ratings	Storage: -40° to 80°C (-40° to 176° F) Operating: -25° to +70°C (-13° to 158° F)	Short-Circuit Protection*	Cartridge fuses gl 10 A-500V 10,3x381 100 KA
Working Positions	All working positions are allowed	Terminal Markings	According to CENELEC EN 50013
Mechanical Life	Pushbuttons, selector switches: Joy stick switches: 1,000,000 operations Mushroom pushbuttons: 300,000 operations	Connections	Single screw with non-loosening plate clamp, 14AWG max.
		Contacts Operation	Self-cleaning types EN01 (N.C.) EN 10 (N.O.) slow action, positive opening
		Operation Frequency	3600 operations per hour max.
		Utilization Category	AC15 (Control of AC electromagnetic loads) 24 volts AC at 10 amps 130 volts AC at 6.5 amps DC13 (Control of DC electromagnetic loads) 24 volts DC at 1.5 amps 110 volts DC at 0.5 amps

*Note: Recommended, not supplied

22 mm Metal Pushbuttons

Momentary extended pushbuttons

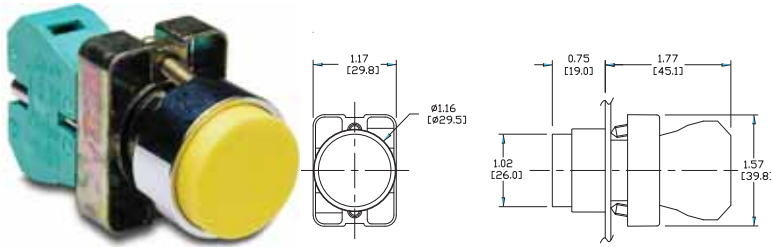

Part Number	Color	Price	Description
GCX1110	Black	<--->	One N.O. contact block, extended 30 mm dia. actuator, mounts in 22 mm hole
GCX1111	Red	<--->	One N.C. contact block, extended 30 mm dia. actuator, mounts in 22 mm hole
GCX1112	Green	<--->	One N.O. contact block, extended 30 mm dia. actuator, mounts in 22 mm hole
GCX1113	Yellow	<--->	
GCX1114	Blue	<--->	
GCX1115	White	<--->	

GCX1113

Double-headed momentary pushbuttons

Part Number	Price	Double-headed Momentary Pushbuttons Description
GCX1150	<--->	Double-headed for on/off control, One N.O. and one N.C. contact block, fits in 22 mm dia. hole, without symbols
GCX1151-24	<--->	24VDC/VAC double-headed with indicator, faces without symbols. One N.O. and one N.C. contact block, fits in 22 mm dia. hole
GCX1151-120	<--->	120VDC/VAC double-headed with indicator, faces without symbols. One N.O. and one N.C. contact block, fits in 22 mm dia. hole
GCX1152	<--->	Double-headed for on/off control. One N.O. and one N.C. contact block, fits in 22 mm dia. hole. With ON(I) and OFF (O) symbols
GCX1153-24*	<--->	24VDC/VAC double-headed with indicator, with ON (1) and OFF (0) symbols. One N.O. and one N.C. contact block
GCX1153-120*	<--->	120VDC/VAC double-headed with indicator, with ON (1) and OFF (0) symbols. One N.O. and one N.C. contact block


* Note: Lamp data on page 25-42




GCX1152 (with on/off symbols)



GCX1151-24

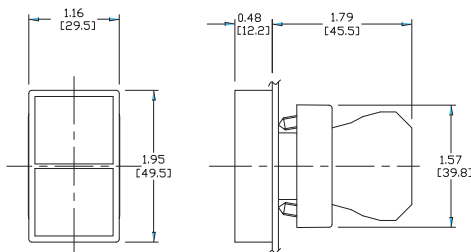

GCX1150, GCX1152 models

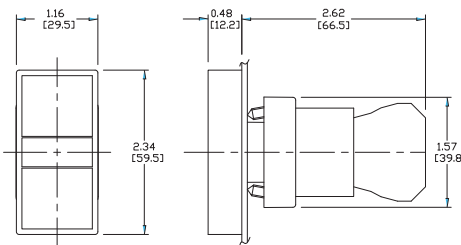

**GCX1151-24, GCX1153-24,
GCX1151-120, GCX1153-120 models**

Note: Find our extensive line of accessories on pages 25-42 to 25-44.

Note: All dimensions are in inches [millimeters]

GCX Series 22 mm Metal Pilot Devices

Features

Any combination of contact blocks is allowed, up to a total of six (two blocks wide and three blocks deep)

Secure mounting method eliminates twisting in mounting hole

Support base mounts into panels up to 6 mm thick

Operators are protected to IP65


Chrome-plated alloy bezel is not only corrosion-resistant, but also attractive



To remove operator, press toward support base and twist counterclockwise.




To install switch, place support base against rear of panel (not shown here), insert the operator and twist clockwise until it clicks into place. Carefully tighten the securing screws. Do not over-tighten.

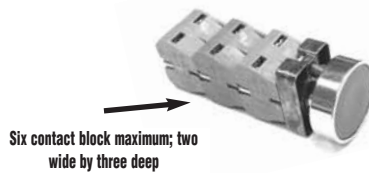

Six contact block maximum; two wide by three deep

Self-cleaning gold-plated silver contacts provide reliable, low-energy switching


Contacts rated A300
(Refer to page e24-51)



Pressure plate wiring terminals for easy, secure wiring, accepting up to 14 AWG wire

Clear contact block for illustration purposes. Clear contact blocks are not available for sale from AutomationDirect.

All indicators offer side wire entry with back screw terminals for easy wiring



22 mm Pilot Device Accessories

Replacement incandescent bulbs



ECX1902-5

Part Number	Quantity	Price	Rating	Description
ECX1900-5	Pkg of 5 bulbs	<--->	6V@ 200mA , 1.2 watts	6V replacement bulb for 22 mm switches and indicators. Miniature bayonet base T31/4
ECX1902-5	Pkg of 5 bulbs	<--->	24V@ 80mA 2 watts	24V replacement bulb for 22 mm switches and indicators. Miniature bayonet base T31/4
ECX1904-5	Pkg of 5 bulbs	<--->	130V@20mA 2.6 watts	120V replacement bulb for 22 mm switches and indicators. Miniature bayonet base T31/4

Note: Bulb removal tool available. Order part number HT8LAMPTOOL.

Replacement LED bulbs



ECX1915-2

Part Number	Color	Quantity	Price	Rating	Description
ECX1911-2	Red	Pkg of 2 LED lamps	<--->	24V@26mA 0.6 watts	LED replacement lamp for miniature bayonet bases Works with 22 mm metal and non-metal switches and indicators, but illumination will not be as even when used with 22 mm indicators Note: Will not replace sealed C-H monoblock LED indicators.
ECX1912-2	Green		<--->		
ECX1913-2	Yellow		<--->		
ECX1914-2	Blue		<--->		
ECX1915-2	White		<--->		
ECX1921-2	Red		<--->	120V@5mA 0.6 watts	
ECX1922-2	Green		<--->		
ECX1923-2	Yellow		<--->		
ECX1924-2	Blue		<--->		
ECX1925-2	White		<--->		

Note: LED modules have very low current draw and should not be used with triac output devices like PLC triac output modules. It is recommended that dry contact outputs be used to switch 120 volt AC modules.

Hole plug



ECX1490

Part Number	Color	Price	Description
ECX1490	Black	<--->	Plastic hole plug for 22.5 mm openings in panels and enclosures; supplied with O-ring and mounting screw. Two plugs per package.

Pilot Light replacement lens



PL1170PR-5

Pilot Light Replacement Lens				
Part Number	Lamp Color	Price	Description	Use with
PL1170PR-5	Red	<--->	22 mm metallic series pilot light replacement lens, 5/pk	Part numbers starting with GCX123
PL1170PV-5	Green	<--->	22 mm metallic series pilot light replacement lens, 5/pk	
PL1170PG-5	Yellow	<--->	22 mm metallic series pilot light replacement lens, 5/pk	
PL1170PB-5	Blue	<--->	22 mm metallic series pilot light replacement lens, 5/pk	
PL1170PN-5	Clear	<--->	22 mm metallic series pilot light replacement lens, 5/pk	
PL1170PW-5	White	<--->	22 mm metallic series pilot light replacement lens, 5/pk	

Protective covers for pushbuttons




ECX1703-5

Part Number	Color	Quantity	Price	Description
ECX1700-5	Black	Pkg of 5 Protective caps	<--->	Silicone protective covers for use with 22 mm plastic standard-size flush pushbuttons. Will not work with C-H pushbuttons, 22 mm plastic illuminated or extended pushbuttons, or 22 mm plastic pushbuttons with 40 mm actuator face.
ECX1701-5	Red		<--->	
ECX1702-5	Green		<--->	
ECX1703-5	Yellow		<--->	
ECX1704-5	Blue		<--->	
ECX1705-5	Clear		<--->	
ECX1706-5	Clear	<--->	Clear silicone protective covers for use with 22 mm plastic illuminated and extended pushbuttons only . Will not work with C-H pushbuttons, 22 mm plastic pushbuttons with 40 mm actuator face, or 22 mm plastic lighted mushroom pushbuttons.	

22 mm Pilot Device Accessories


Replacement 22 mm support base



ECX1029-2

Part Number	Quantity	Price	Description
ECX3029-2	Pkg of 1	<--->	22 mm plastic support base Note: This item is supplied as a replacement part and is not required with any switch assembly. Will not work with Cutler-Hammer 22 mm switches sold by AUTOMATIONDIRECT

Replacement contact blocks

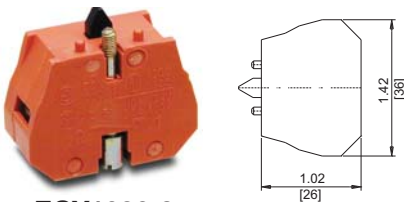

ECX1030-2

Part Number	Quantity	Price	Contacts	Description
ECX1030-2	Pkg of 2	<--->	Red, normally-closed (N.C.)	Replacement contact block for 22 mm plastic push-buttons and selector switches. Tightening Torque, terminal screw: 0.8Nm max mounting screw: 0.5Nm max
ECX1030-5	Pkg of 5	<--->		
ECX1040-2	Pkg of 2	<--->	Green, normally-open (N.O.)	Note: Will not work with Cutler-Hammer 22 mm switches sold by AUTOMATIONDIRECT
ECX1040-5	Pkg of 5	<--->		
ECX1042-2	Pkg of 2	<--->	Brown, normally-open (N.O.), push-push	Use on lighted Push-push button only

Note: See electrical specifications on page e25-26.

Replacement keys



ECX1067-2

Part Number	Quantity	Price	Description
ECX1067-2	Pkg of 2 sets (2 keys per set)	<--->	Replacement keys for all key-actuated 22 mm plastic selector switches only. Will not work with Cutler-Hammer 22 mm keyed switches sold by AutomationDirect

Note: All key-actuated 22mm metal selector switches are keyed alike.

EMERGENCY STOP legend plate



ECX1651

Part Number	Quantity	Price	Description
ECX1651	Pkg of 1	<--->	Oversize yellow circular EMERGENCY STOP legend plate for 22 mm E-stop type mushroom pushbuttons, 60 mm outside diameter.

Knockout Punches



109225

Ruko's knockout punch hole-cutting tool includes punch, die and draw bolt (without ball bearing). Use for sheet steel, stainless-steel sheets, non-ferrous and light metals, and plastics up to 0.16" (8 ga.) thick.

Replacement bolts are offered in three of the most popular sizes.

Note: Part number 109225 is recommended when punching holes for 22mm pilot devices.

Two-position short lever operator



GR1172PR-5


Note: All dimensions are in inches [millimeters].

Short Lever Replacement Operator				
Part Number	Lamp Color	Price	2-Position	Use with
GR1172PR-5	Red	<--->	22 mm 2-position selector switch illuminated short lever replacement operator, 5/pk	Part numbers starting with GCX124, GCX125 GCX324, GCX325
GR1172PV-5	Green	<--->	22 mm 2-position selector switch illuminated short lever replacement operator, 5/pk	
GR1172PG-5	Yellow	<--->	22 mm 2-position selector switch illuminated short lever replacement operator, 5/pk	
GR1172PB-5	Blue	<--->	22 mm 2-position selector switch illuminated short lever replacement operator, 5/pk	
GR1172PN-5	Clear	<--->	22 mm 2-position selector switch illuminated short lever replacement operator, 5/pk	

E22 Legend Plates

Legend plates

Aluminum legend plates feature a plastisol backing to help prevent rotation of the operator.

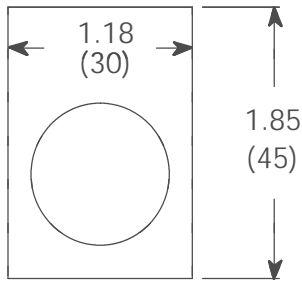

Approximate dimensions in inches (mm).

E22VA8



Accessories			
Color	Part Number	Legend	Price
Black	E22NS11	"CLOSE"	<--->
Black	E22NS12	"DOWN"	<--->
Red	E22NS13	"EMERG. STOP"	<--->
Black	E22NS15	"FORWARD"	<--->
Black	E22NS19	"JOG"	<--->
Black	E22NS25	"ON"	<--->
Black	E22NS26	"OPEN"	<--->
Black	E22NS30	"REVERSE"	<--->
Black	E22NS31	"RUN"	<--->
Black	E22NS33	"START"	<--->
Red	E22NS34	"STOP"	<--->
Black	E22NS35	"UP"	<--->
Black	E22NS36	Blank plate	<--->
Red	E22NS37	Blank plate	<--->
Black	E22NS38	"FOR-REV"	<--->
Black	E22NS39	"HAND-AUTO"	<--->
Black	E22NS41	"JOG-RUN"	<--->
Black	E22NS42	"OFF-ON"	<--->
Black	E22NS43	"OPEN-CLOSE"	<--->
Black	E22NS48	"UP-DOWN"	<--->
Black	E22NS50	"FOR-OFF-REV"	<--->
Black	E22NS51	"HAND-OFF-AUTO"	<--->
Black	E22NS80	"POWER ON"	<--->
Black	E22NS81	"MOTOR RUN"	<--->
Black	E22NS82	"MOTOR STOP"	<--->
Black	E22NL36	Jumbo alum. blank plate (1.57 in wide x 1.85 in tall)	<--->
Red	E22NL37	Jumbo alum. blank plate (1.57 in wide x 1.85 in tall)	<--->
Red /black	E22NSP77	Plastic blank plate; red on one side, black on other side; either side can have letters engraved down into white plastic	<--->
Yellow	E22VA8	"EMERGENCY STOP" oversize yellow legend plate, 2.76" (70mm), printed	<--->

NOTE: Legend plates also work with the 22 mm metal switches. The removal of the locator tab on the legend plate is required for use with the 22 mm metal switches. This is easily accomplished with a round file or small grinder.