

# EZTEXT PANELS SELECTION GUIDE



EZ Text Panel Specifications					
Part Number	EZ-220	EZ-220L	EZ-420	EZ-220P	EZ-SP
<b>Price</b>	<--->	<--->	<--->	<--->	<--->
<b>Description</b>	2x20 LCD display, five user defined pushbuttons, five LEDs	2x20 LCD display, large characters, five user defined pushbuttons, five LEDs	4x20 LCD display, five user defined pushbuttons, five LEDs	2x20 LCD display, numeric keypad, five user defined pushbuttons, three tri-color LED annunciators	1x16 LCD display, 8 digit LED display, five control pushbuttons
<b>Display Type</b>	Character LCD, 2 lines by 20 characters w/LED backlight		Character LCD, 4 lines by 20 characters w/LED backlight	Character LCD, 2 lines by 20 characters w/LED backlight	Character LCD, 1 line by 16 characters w/8 digit .52" LED numeric display
<b>Character Height</b>	5.55mm (0.22")	8.06mm (0.316")	4.75mm (0.187")	5.55mm (0.22")	8.06mm (0.316")
<b>Keypad Overlay</b>	Five user-defined pushbuttons and four control pushbuttons			Numeric keypad, five user defined pushbuttons and four control pushbuttons	Four control pushbuttons
<b>CPU Type</b>	8-bit	8-bit	8-bit	8-bit	8-bit
<b>Service Power</b>	24VDC (20-30VDC operating range)				
<b>Power Consumption</b>	4 Watts @ 24VDC	4.5 Watts @ 24VDC	4 Watts @ 24VDC	5.5 Watts @ 24VDC	6.5 Watts @ 24VDC
<b>Enclosure</b>	NEMA 4, 4X (indoor)				
<b>Agency Approval</b>	UL, cUL, CE				
<b>Operating Temperature</b>	0° to 45°C (32° to 113°F)				
<b>Storage Temperature</b>	-20° to 60°C (-4° to 140°F)				
<b>Humidity</b>	10-95% RH, (non-condensing)				
<b>Electrical Noise</b>	NEMA ICS 2-230 showering arc ANSI C37.90a-1974 SWC Level C Chattering Relay Test				
<b>Withstand Voltage</b>	1000VDC (1 minute), between power supply input terminal and protective ground (FG)				
<b>Vibration</b>	5 - 55Hz 2G for 2 hours in the X, Y, and Z axes				
<b>Shock</b>	10G for under 12 ms in the X, Y, and Z axes				
<b>Burn-in</b>	Temperature cycled 96 hours and then fully functional tested				
<b>LED/LCD Life</b>	100,000 hours				
<b>Serial Communications</b>	Download/Program/PLC Port RS-232/RS422 15-pin D-sub (female)				
<b>Dimensions (in/mm)</b>	7.418x5.00 (188.419x126.998)	10.018x5.00 (254.458x126.998)	7.418x5.00 (188.419x126.998)	10.018x5.00 (254.458x126.998)	10.018x5.00 (254.458x126.998)
<b>Weight (lbs.)</b>	.65	.85	.65	.85	.85

# EZTEXT PANELS SPECIFICATIONS

## Introduction



EZText panels provide a low-cost, easy-to-use operator interface alternative for your PLC system. With easy-to-configure Windows-based software and simple installation, you can be connected and running in minutes. If your application requires pushbuttons, LEDs, or text display, but your budget is low, check out our complete line of EZText panels.

## Features

The following features are common to all EZText panels:

- LCD display
- Five user-defined pushbuttons (except EZ-SP)
- Five user-defined LEDs (except EZ-SP)
- Up to three embedded PLC data variables (except EZ-SP)
- Built-in menu system
- EMI filtered power supply to reduce communication problems

## Display



Depending on the model, the LCD display window supports one, two or four message lines that can display up to 20 characters each (16 on EZ-SP). Messages are programmed using the EZText Programming Software and can be static text, dynamic text, or interactive. The messages are controlled by the PLC program.

## Pushbuttons



The panels have sealed membrane pushbuttons that allow you to trigger PLC actions. Each pushbutton can be configured to function as one of three switch types:

**Alternate switch** — keeps its current state until the button is pushed again

**Momentary switch** — activated only while the button is being pushed

**Set with release switch** — similar to the alternate switch except that the PLC can control the release



## Compatibility

The EZText panels can be connected to several types of PLCs: Allen-Bradley, GE, Mitsubishi, Omron, and Modicon. Review the PLC compatibility table below to determine if your PLC is supported. With the proper cable and the EZText programming software, you can be easily connected.

## Getting started

Below is a quick checklist of what you will need to get started:

- EZText panel
- Programming cable
- 24 VDC power supply
- PLC
- Cable to connect to PLC
- Personal computer
- EZText Programming Software

PLC Compatibility Table			
PLC	Model	Protocols	
<b>Allen-Bradley</b>	MicroLogix 1000, 1200 and 1500; SLC 5/03, /04, /05, PLC5	DF1	
<b>GE</b>	90/30, 90/70	SNPX	
<b>Mitsubishi</b>	FX Series (all)	Direct, Multidrop	
<b>Omron</b>	C200, C500	Host Link	
<b>Siemens</b>	S7 300/400 PLCs, MPI Adapter	3964R protocol	
<b>DirectLOGIC</b>	DL05 DL06	K-Sequence	
		<b>DirectNet</b>	
	DL105	MODBUS (Koyo addressing)	
		K-Sequence	
	DL205	D2-230	K-Sequence
		D2-240	K-Sequence
			<b>DirectNet</b>
		D2-250-1	K-Sequence
		D2-260	<b>DirectNet</b>
			MODBUS (Koyo addressing)
	DL305	D2-240/250/260 DCM	<b>DirectNet</b>
		D3-330/330P*	<b>DirectNet</b>
		D3-340	<b>DirectNet</b>
			K-Sequence
		D3-350	<b>DirectNet</b>
		MODBUS (Koyo addressing)	
DL405	D3-350 DCM	<b>DirectNet</b>	
	D4-430	K-Sequence	
		<b>DirectNet</b>	
	D4-440	K-Sequence	
		<b>DirectNet</b>	
	D4-450	K-Sequence	
	<b>DirectNet</b>		
	MODBUS (Koyo addressing)		
	All with DCM	<b>DirectNet</b>	
	H2- WinPLC	MODBUS RTU (serial port)	
	H2/H4 EBC (Think-N-Do Studio Version 6.5 or later required)	K-Sequence (serial port)	


\* Requires Data Communications Unit

# EZTEXT DIMENSIONS AND INSTALLATION

All EZText panels are designed to be inserted into a rectangular cutout in some type of mounting surface and secured with screws or DIN clips. The four screws that protrude through the mounting surface secure the panel to the mounting surface. A rubber gasket provides a seal between the bezel and mounting surface. When properly mounted, all of the EZText panels comply with the NEMA 4/4X rating for indoor use.

The optional DIN clips are metal brackets that attach to the panel and secure the front panel to a mounting surface with a screw. This provides an alternative mounting solution to a panel or enclosure cutout.

Dimensions in inches (mm)		
Legend	EZ220/420	EZ220L/220P/SP
<b>A</b>	7.418 (188.419)	10.018 (254.458)
<b>B</b>	5.000 (126.998)	5.000 (126.998)
<b>C</b>	0.625 (15.875)	0.625 (15.875)
<b>D</b>	3.50 (88.9)	3.50 (88.9)
<b>E</b>	.750 (19.05)	.750 (19.05)
<b>F</b>	.450 (11.430)	.450 (11.430)
<b>G</b>	1.154 (29.312)	1.154 (29.312)
<b>H</b>	5.750 (146.050)	8.350 (212.090)
<b>I</b>	.834 (21.184)	.834 (21.184)

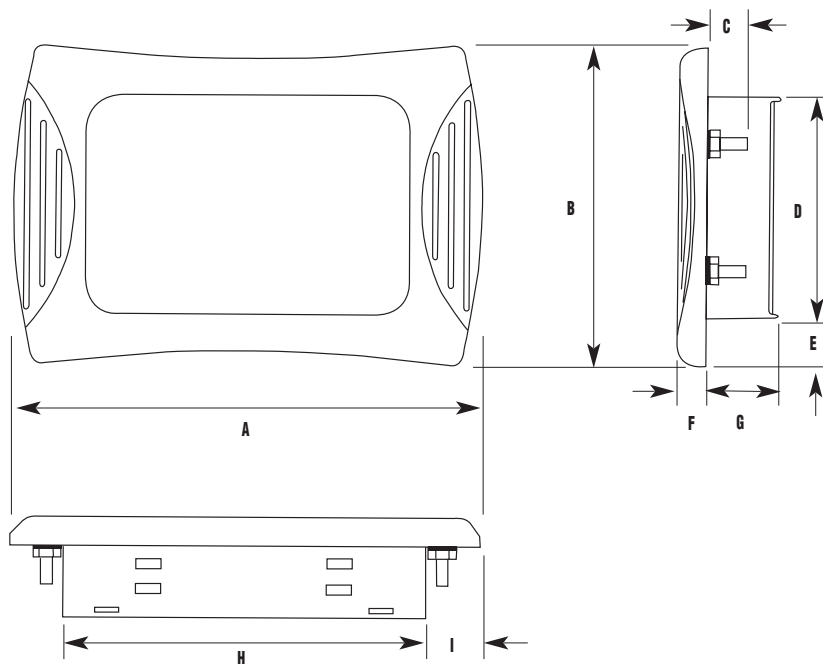

**Note:** Panels use same mounting dimensions as comparable Optimate panels.

Mounting Accessories		
Part Number	Description	Price
<b>EZ-TEXT-S-GSK</b>	Standard replacement gasket (small) for EZ-220 and EZ-420	<--->
<b>EZ-TEXT-L-GSK</b>	Standard replacement gasket (large) for EZ-220L, EZ-220P and EZ-SP	<--->
<b>EZ-BRK-2</b>	DIN clips (pk. of 4)	<--->
<b>EZ-TEXT-STUDS</b>	Mounting studs (pk. of 4)	<--->
<b>EZ-COMCON3</b>	15-pin male D-sub connector with terminal blocks, for connecting RS422 network cable from EZTouch or EZText panels	<--->
<b>EZ-COMCON4</b>	9-pin female D-sub connector with terminal blocks	<--->
<b>EZ-TEXT-CORE</b>	EZText replacement ferrite cores	<--->
<b>EZ-TEXT-PWRTERM</b>	EZText replacement power terminal strip	<--->

# CHOOSE FROM FIVE EZTEXT™ MODELS



EZ-220 &lt;---&gt;

## Two-line message display and pushbuttons

- Two-line x 20-character message display
- Five user-defined buttons and LEDs
- Scroll data entry
- Built-in menu system
- EMI filtered power supply reduces communication problems



EZ-420 &lt;---&gt;

## Four-line message display and pushbuttons

- Four-line x 20-character message display
- Five user-defined buttons and LEDs
- Scroll data entry
- Built-in menu system
- EMI filtered power supply reduces communication problems



EZ-220L &lt;---&gt;

## Two-line large message display and buttons

- Two-line x 20-large character message display
- Five user-defined buttons and LEDs
- Scroll data entry
- Built-in menu system
- EMI filtered power supply reduces communication problems



EZ-220P &lt;---&gt;

## Two-line message display and keypad

- Two-line x 20-character message display
- Five user-defined buttons and LEDs
- Numeric keypad
- Scroll data entry
- Three tri-color LED annunciators
- Built-in menu system
- EMI filtered power supply reduces communication problems

Oper. Int.



EZ-SP &lt;---&gt;

## Eight-digit setpoint panel

- Setpoint entry with one-line x 16-character text display, 8-digit numerical display
- Up to 256 setpoints or displays with text
- Scroll keys for changing values
- "Enter" key to send value to the PLC



EZ-MULTIDROP &lt;---&gt;

## EZ Multiplexer communication master unit

- Allows up to five EZText Panels to communicate with a single PLC
- Optimizes data requests from panels for greater efficiency
- Communicates to panels at 38.4k baud
- Supports non-contiguous PLC registers