

Enclosure Accessories - Lighting



Lighting



WDL026SWLT120



WKL025SWLT120

Use where illumination is needed inside an enclosure. WDL series is available with motion sensor or on/off switch. With optional holder kit, WDL series lights can be "hand-held" for spot illumination.

Motion sensor version detects the motion of the enclosure door being opened and automatically turns light on. The sensor is factory pre-set to turn light off five minutes after motion ceases. The motion sensor does not detect movement through glass or fiberglass, thus allowing installation in enclosures with windows or glass doors.

- Uses fluorescent lamps
- Light color/temp is bright white
- Holder and lamp housing manufactured from UL94-V0, impact resistant plastic
- Connection: 4-pole terminal, max. AWG 14 for power supply and parallel wiring of two lights
- Includes mounting screws

Enclosure Shipping Schedule		
Same day	1 - 7 days	1 - 10 days
Color indicates shipping lead time in business days.		

Lighting Unit Part Numbers	Price	Operating Voltage	Outlet Receptacle	Activation Method	Light Intensity (LM)	Watts (W)	Lamp Current (HRS)	Dimensions HxWxD
WDL026SWLT120	<-->	110-120	No	Switch on housing	1,000	20	10,000	3.93x15.6x2.6 (100x396x67)
WDL026MSLT120	<-->	110-120	No	Passive infrared motion sensor	1000	20	10,000	3.93x15.6x2.6 (100x396x67)
WKL025SWLT120	<-->	110-120	Yes	Switch on housing	900	9	5,000	2.55x14x2.55 (65x355x65)

Note: Dimensions in inches (millimeters); letters in table correspond to letters on dimensional drawings.

Mounting plates for WDL series lights

Part Number	Price	Description
WDL026MAG	<-->	Two magnet mounting plates
WDL026SEAD	<-->	Self-adhesive mounting plates


Light holder for WDL series lights



Part Number	Price	Description
LHPC02	<-->	Light holder (self-adhesive back to mount) with 10' power cord

Dimensions

WDL Series

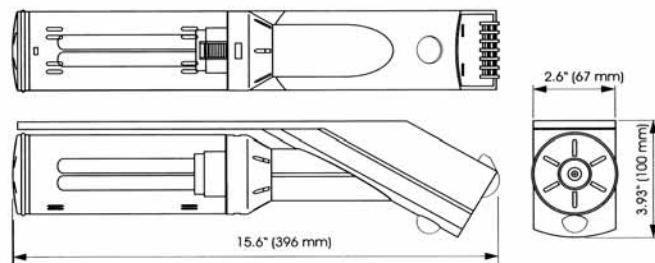

WKL Series

